
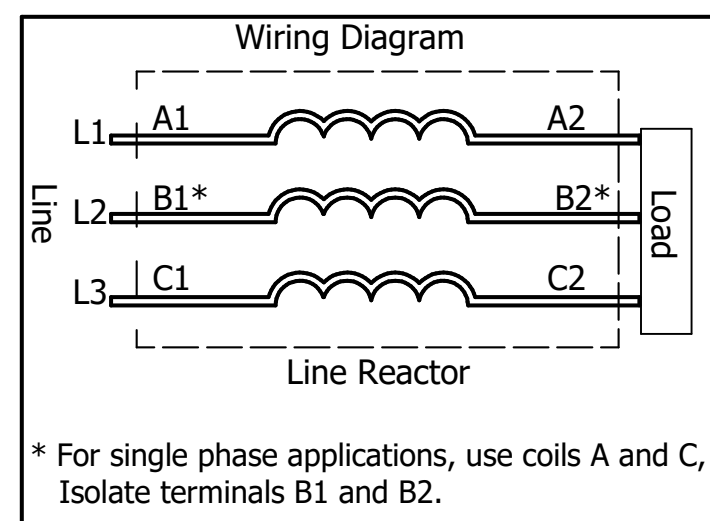
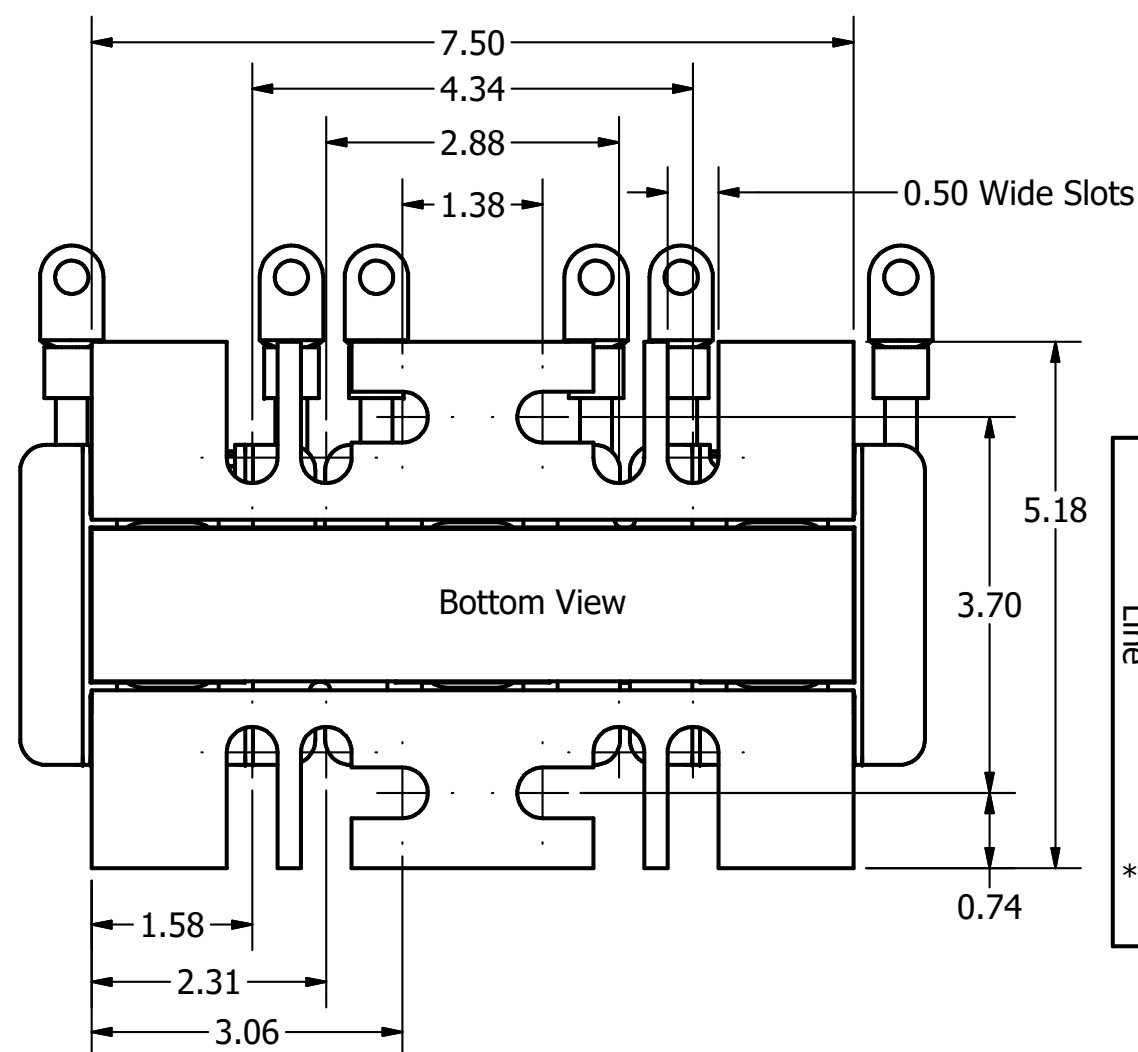
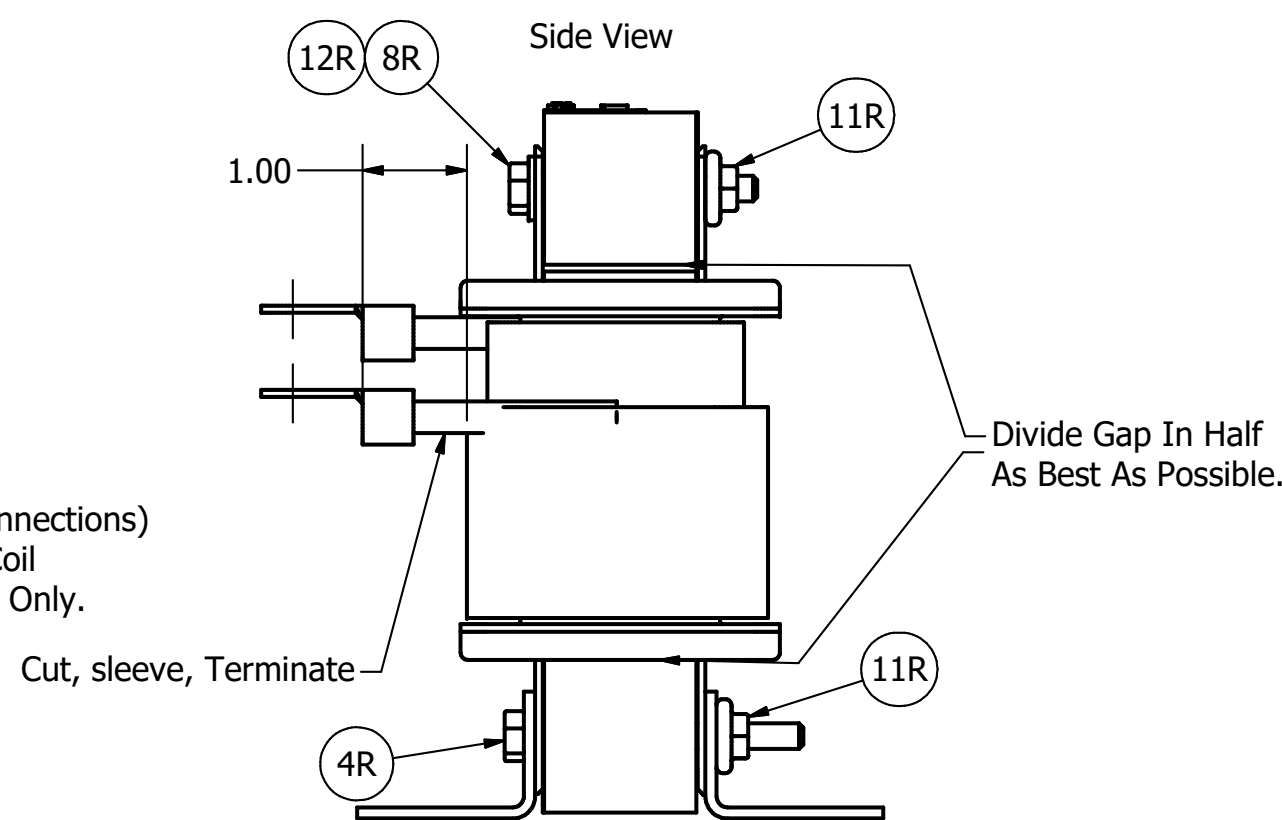
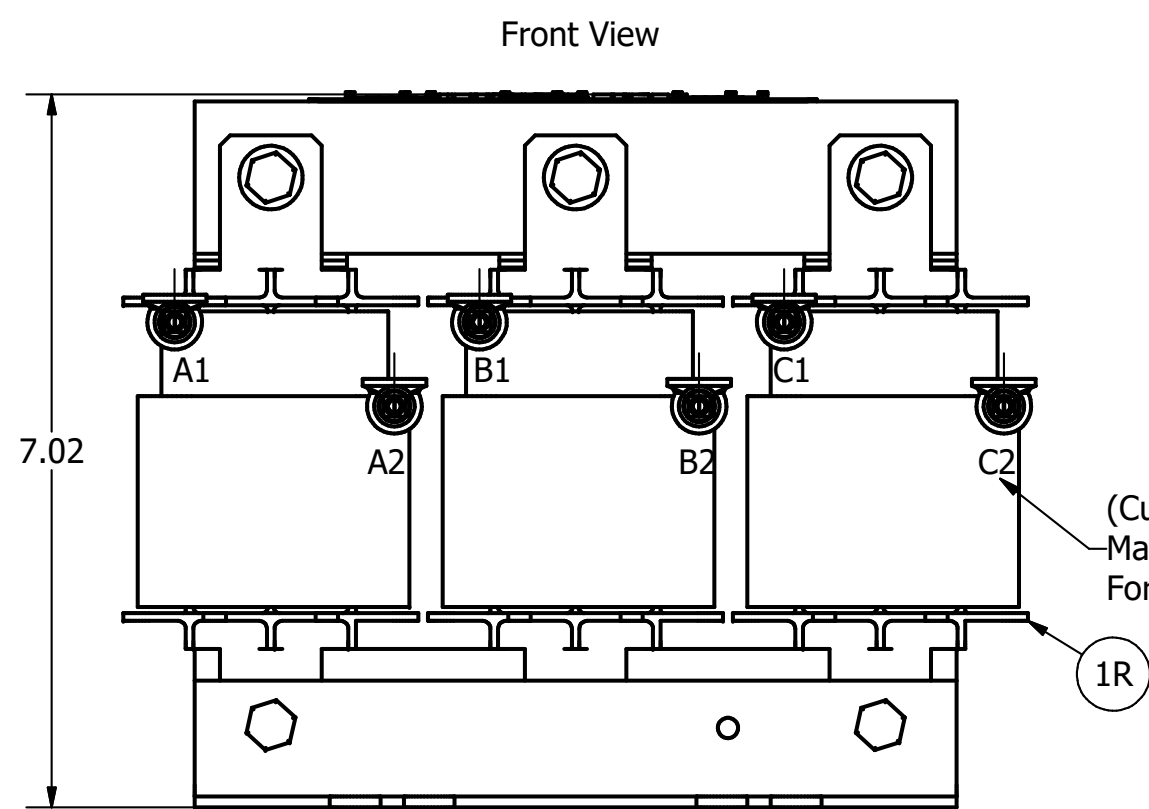


480 Rated Voltage, 600 Max Voltage, High Z, Impedance.									
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Available Lug Kit	Terminal Hole Size (Inches)	Measured Gap
KDRF2H	60	77	77	408	25	226	SLK10	0.313	0.1350

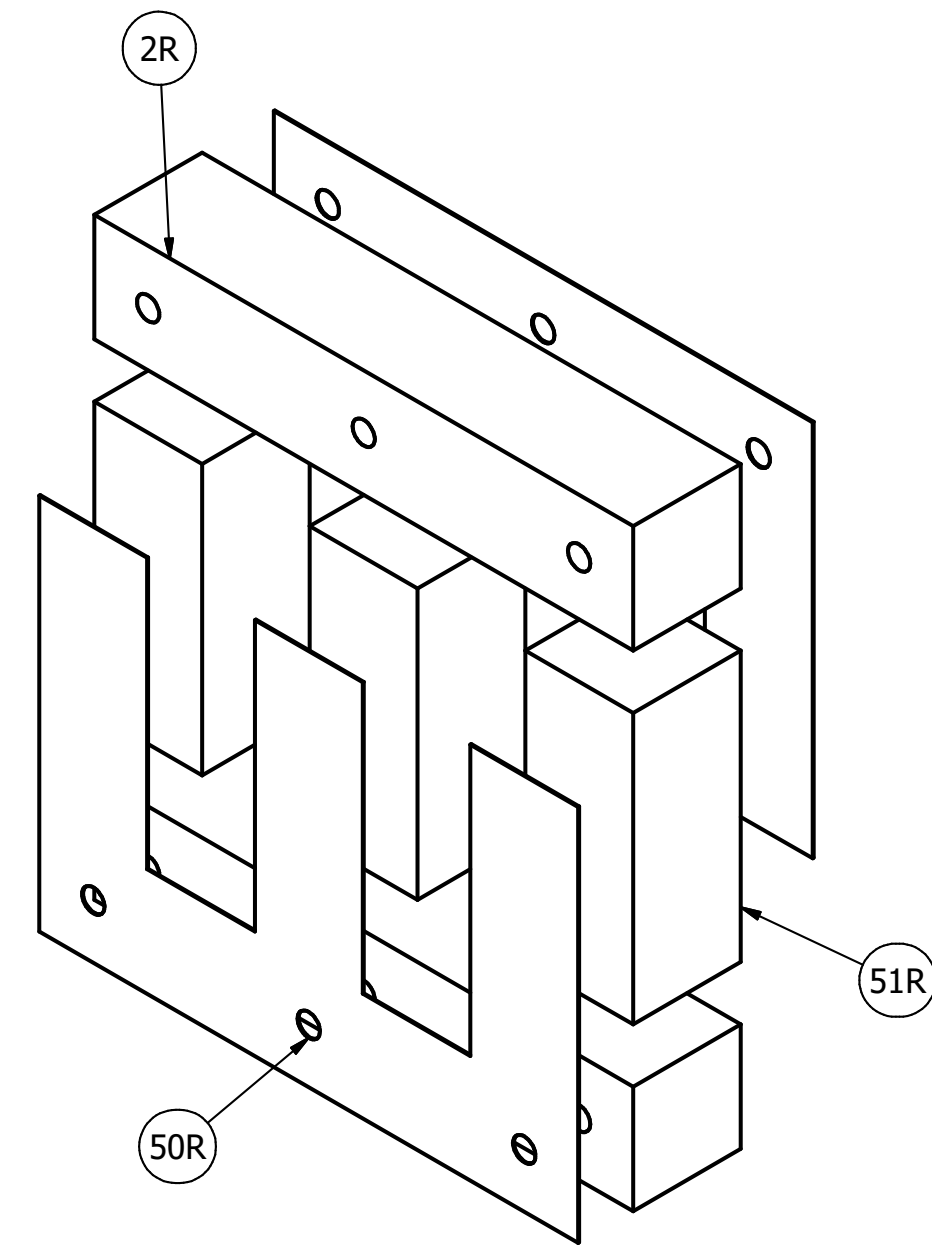

* For single phase applications, use coils A and C, Isolate terminals B1 and B2.

TCI (800) 824-8282 transcoil.com

TCI, LLC
 Germantown, WI USA.
 transcoil.com
 800-824-8282

KDRUL Drive Reactor
 KDR- Motor Amps —
 3PH, 50/60Hz, —V Rated, 600V Max, —A Max
 40C Amb Max, 135C Rise, RoHS
 Manual #30895 LUG KIT #SLK—

UL LISTED CE
 2ND CONT. IMP. MARK

DATE CODE A1 A2 B1 B2 C1 C2

Notes:

1. For KDRUL Version, See Sheet 2
2. UL file number: cULus Listed File E116124.
3. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
4. KDR IOM Manual Part Number 30895
5. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
6. Material(s) Shall be RoHS Compliant
7. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)		W132 N10611 Grant Drive Germantown, WI 53022	
				DECIMAL		KDR F Frame, Ring Lug Reactor Drawing	
				XX ± .25		DRN BY DSW DATE: 1/15/19 107988-1	
				.XXX ± .10		SCALE: 1/2	
				FRACTIONAL ± 1/16		APRVD: SIZE C	
B 4608, Design Updated				1/15/19		DATE: 1/15/19	
NO REVISION				DATE		BY	
				ANGULAR ± 1°		SHT. 1 OF 1	