

480 Rated Voltage, 690 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA9H2	1 1/2	3.00	4.0	12300	2.8	37
KDRAA1H2	2	3.40	3.8	10800	2.8	45
KDRAA2H2	3	4.80	5.4	7650	3.0	42
KDRAA6H2	4	6.20	7.6	5930	3.4	50
KDRAA3H2	5	7.60	8.2	4840	3.7	66
KDRAA3H2	5 1/2	8.20	8.2	4840	3.7	74
KDRAA4H2	7 1/2	11	12	3060	4.0	70
KDRAA5H2	10	14	14	2330	4.2	97.7


208/ 240 Rated Voltage, 690 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA28H2	3	10.6	11	1618	2.6	44.6

600 Rated Voltage, 690 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA46H2	1 1/2	2.40	3.2	19100	2.9	31
KDRAA43H2	2	2.70	3.4	17000	2.7	37
KDRAA44H2	3	3.90	4.5	11800	2.9	47
KDRAA57H2	4	4.90	6.0	9380	3.5	48
KDRAA58H2	5	6.10	6.8	7530	3.4	44
KDRAA58H2	5 1/2	6.60	6.8	7530	3.4	47




480 Rated Voltage, 690 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA9L2	1 1/2	3.00	4.5	7400	3.0	25
KDRAA6L2	4	6.20	7.6	3560	3.0	39
KDRAA3L2	5	7.60	8.2	2900	3.0	45
KDRAA3L2	5 1/2	8.20	8.2	2900	3.0	49
KDRAA4L2	7 1/2	11.0	11.6	2000	3.2	64
KDRAA5L2	10	14	14	1580	3.3	77.7

208/ 240 Rated Voltage, 690 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA28L2	3	10.6	12	971	3.0	42

600 Rated Voltage, 690 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH) +/-10%	Weight (LBS)	Losses (W)
KDRAA47L2	2	2.70	4.8	10200	2.8	19
KDRAA52L2	3	3.90	4.8	7070	3.5	30
KDRAA57L2	4	4.90	7.6	5630	2.9	30
KDRAA58L2	5	6.10	7.6	4520	3.0	39
KDRAA58L2	5 1/2	6.60	7.6	4520	3.0	44
KDRAA48L2	7 1/2	9.00	9.6	3100	3.2	57
KDRAA49L2	10	11	11	2454	3.8	60.7

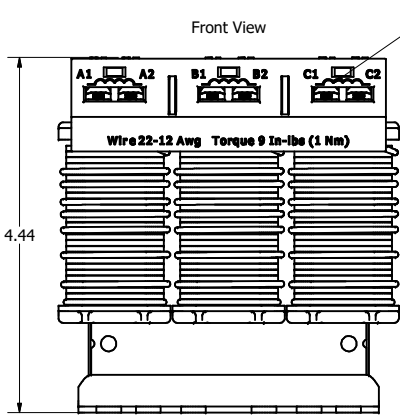

Wire Range: 22-12 AWG.
Torque : 9 In-lbs (1 Nm)

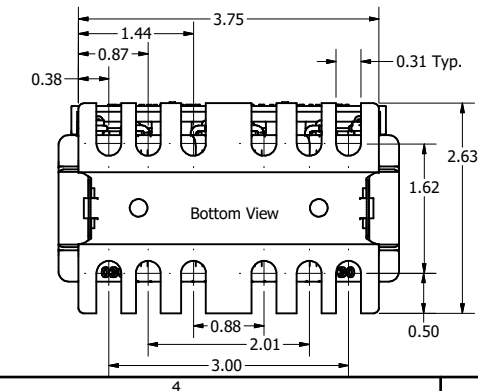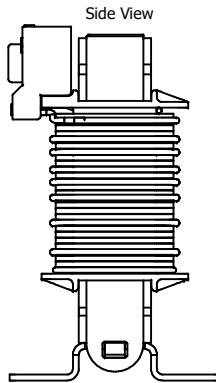

Line Reactor
* For single phase applications, use coils A and C, Isolate terminals B1 and B2.

TGI TCI, LLC | Germantown, WI | transcoll.com

KDR Drive Reactor

KDR Motor Amps
SPH 50/60Hz, —V Rated, 690V Max, —A Max, RefS
80C Amb Max 130C Rise, Manual # 30895

UL LISTED
30 CIRC. EQ. DIV.

CE

Date Code

- Notes: 1. UL file number: cULus Listed File E116124.
2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
5. For Din Rail Kit, See Part Number DR02.
6. Material(s) Shall be RoHS Compliant
7. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TGI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)		KDR AA Frame, Terminal Block Reactor Drawing	
C	KDRAA28L2 (Correct Amps 11 to 12)	7/28/2020	DSW	DECIMAL	.XX ±.25	TGI W132 N10611 Grant Drive Germantown, WI 53022 107073DG DATE 11/3/17 SCALE 1:1.2 SHEET 1 OF 1	
C	4918, KDRAA49L2, 575 to 600v		DSW	.XXX ±.10			
C	KDRAA49L2 (Only Part At Rev C)	10/8/19	DSW				
B	4815, Add Inductors (4), (5), (28), (49)	7/24/19	DSW	FRACTIONAL	± 1/16	DRN BY DATE 11/3/17 SCALE 1:1.2 SHEET 1 OF 1	
A	As Designed	11/3/17	DSW	ANGULAR	± 1°		
NO	REVISION	DATE	BY				