

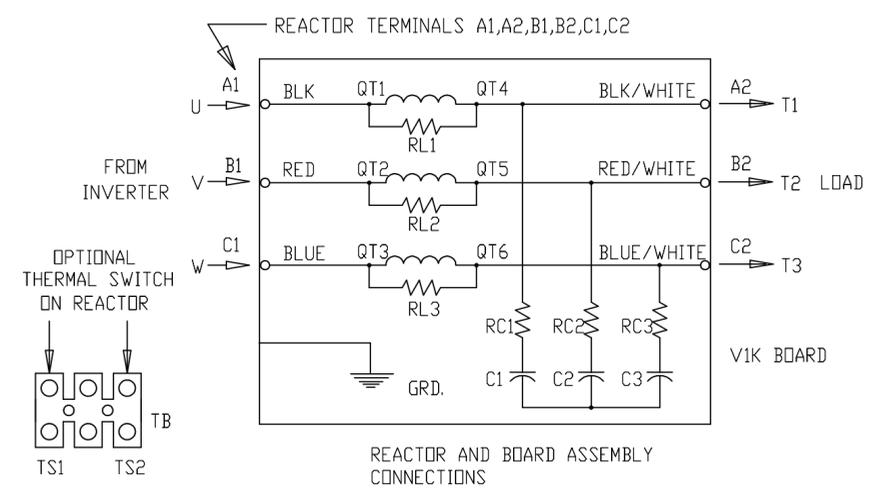
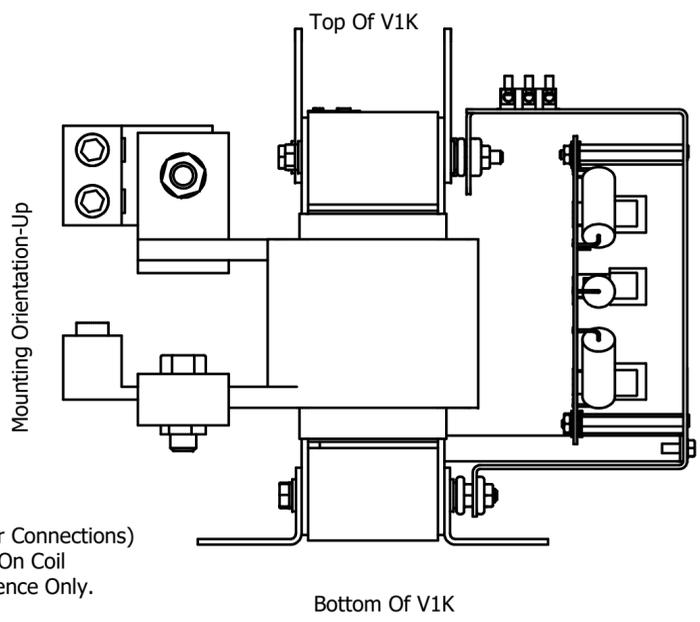
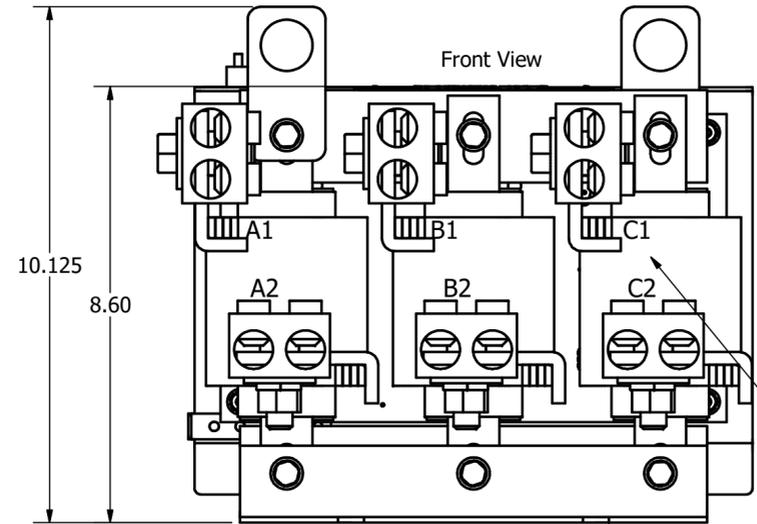


See V1K Installation Guide For Terminal Wire Size And Torque Information.
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

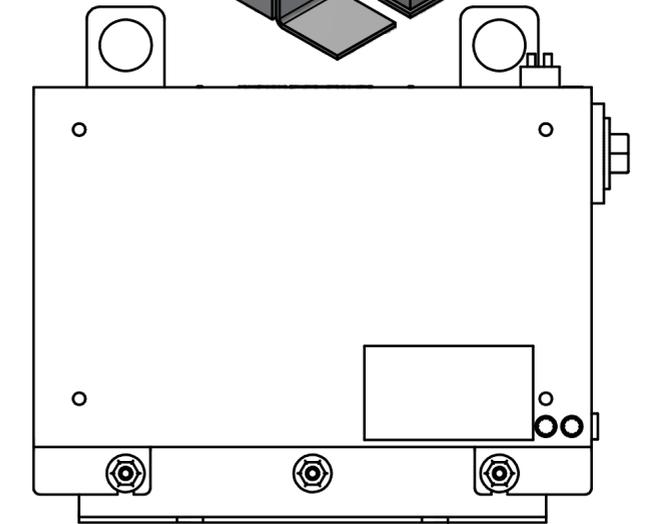


V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K305A00*	600	305	3	80
V1K305A00EX*	600	305	3	80
V1K362A00*	600	362	3	80
V1K362A00EX*	600	362	3	80

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

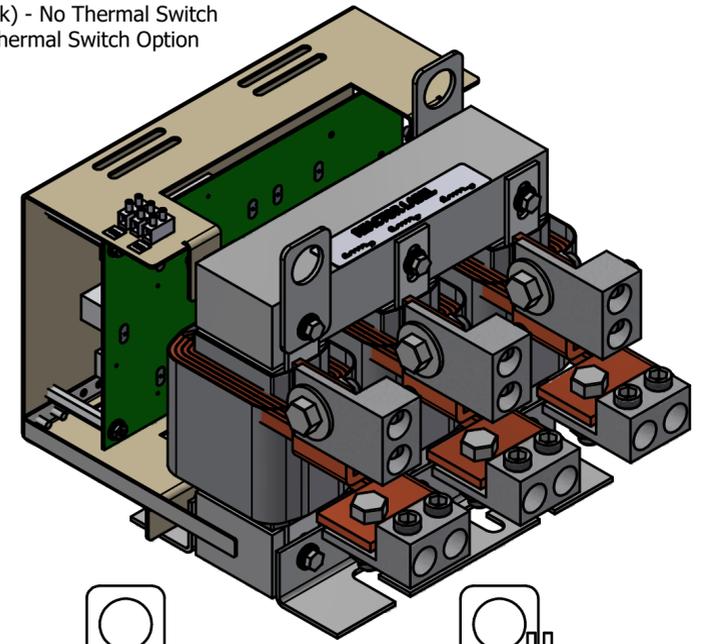

(Customer Connections) Markings On Coil For Reference Only.

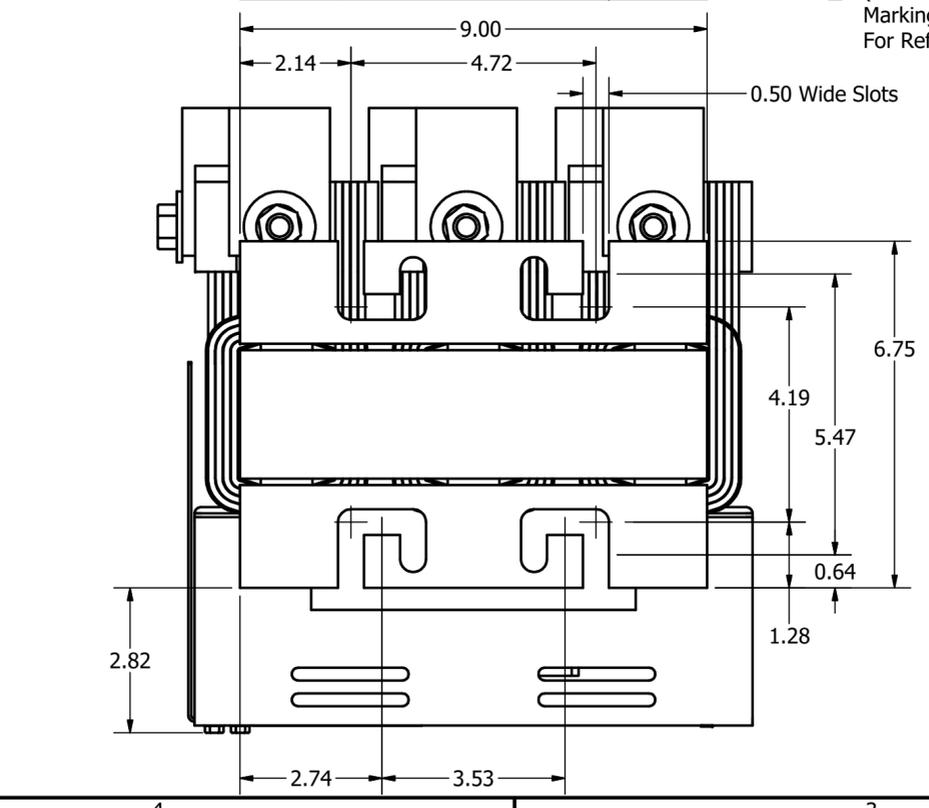

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
 Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 Grant Drive Germantown, WI 53022 © 2022 TCI, LLC	
K	5997 Added T/S Option	07/20/22	JRN	.XX ± .25	VIK Open 305 Amps And 362 Amps		
J	5720, Update Board Mounting	2/11/2022	DSW	.XXX ± .10	DRN BY	DATE	102654DG
I	4658 Rated To Max Voltage	03/04/2019	DSW	FRACTIONAL ± 1/16	SCALE	APRVD:	SIZE
H	4030, Combine V1k Drawings	6/12/17	DSW	ANGULAR ± 1°	1/2		C
NO	REVISION	DATE	BY				SHT.1 OF 1