

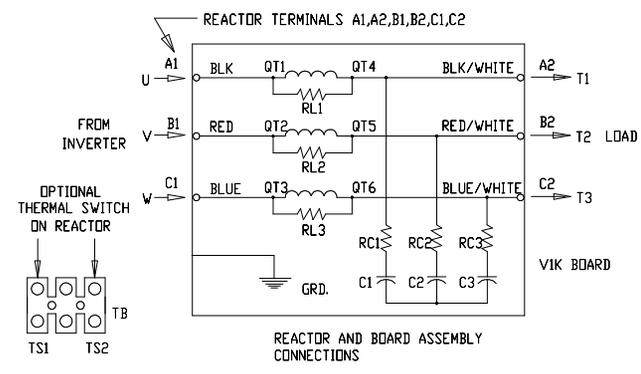


See V1K Installation Guide For Terminal Wire Size And Torque Information.  
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

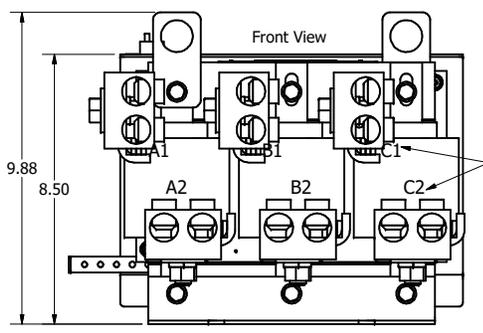




V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K420A00*	600	420	3	90
V1K420A00EX*	600	420	3	90

\* = (Blank) - No Thermal Switch  
 \* = T - Thermal Switch Option

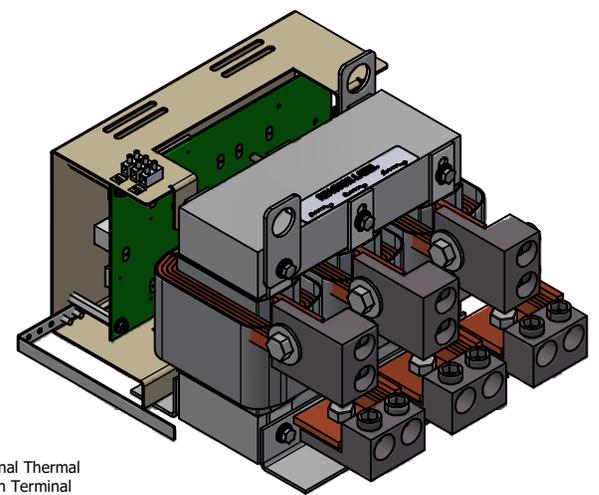

(Customer Connections) Markings On Coil For Reference Only.

Mounting Orientation-Up

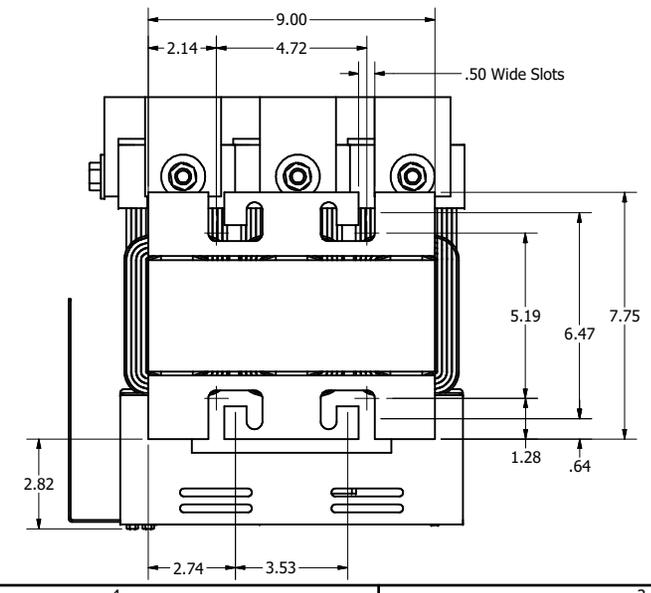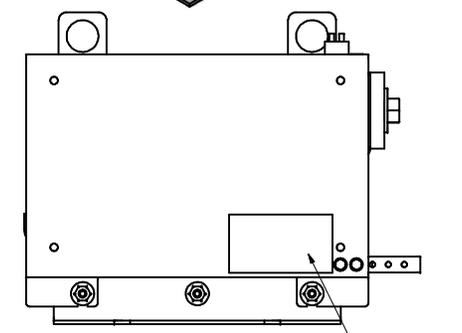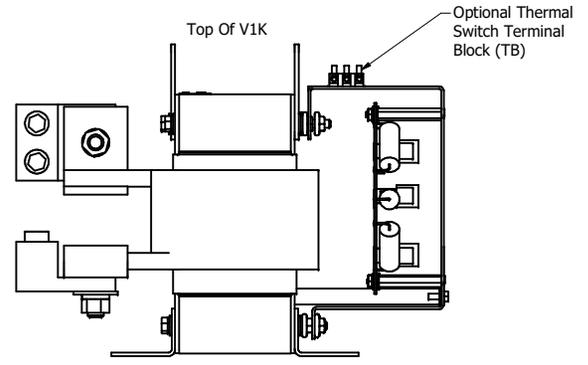

Bottom Of V1K

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.  
 Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.						TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		 W132N10611 (Rev 13 Feb) Germantown, WI 53022 © 2022 TCI, LLC
J	5720 Update Board Mounting	2/10/2022	DSW	FRACTIONAL ± 1/16		V1K Open 420 Amps		
I	4658, Rated To Max Voltage	03/06/2019	JRN	ANGULAR ± 1°		DRN BY: DSW DATE: 4/26/17 SCALE: 1:3		
HI	4030, Combine V1k Drawings	6/12/17	DSW			102657DG		
NO	REVISION	DATE	BY			SHT 1 OF 1		