

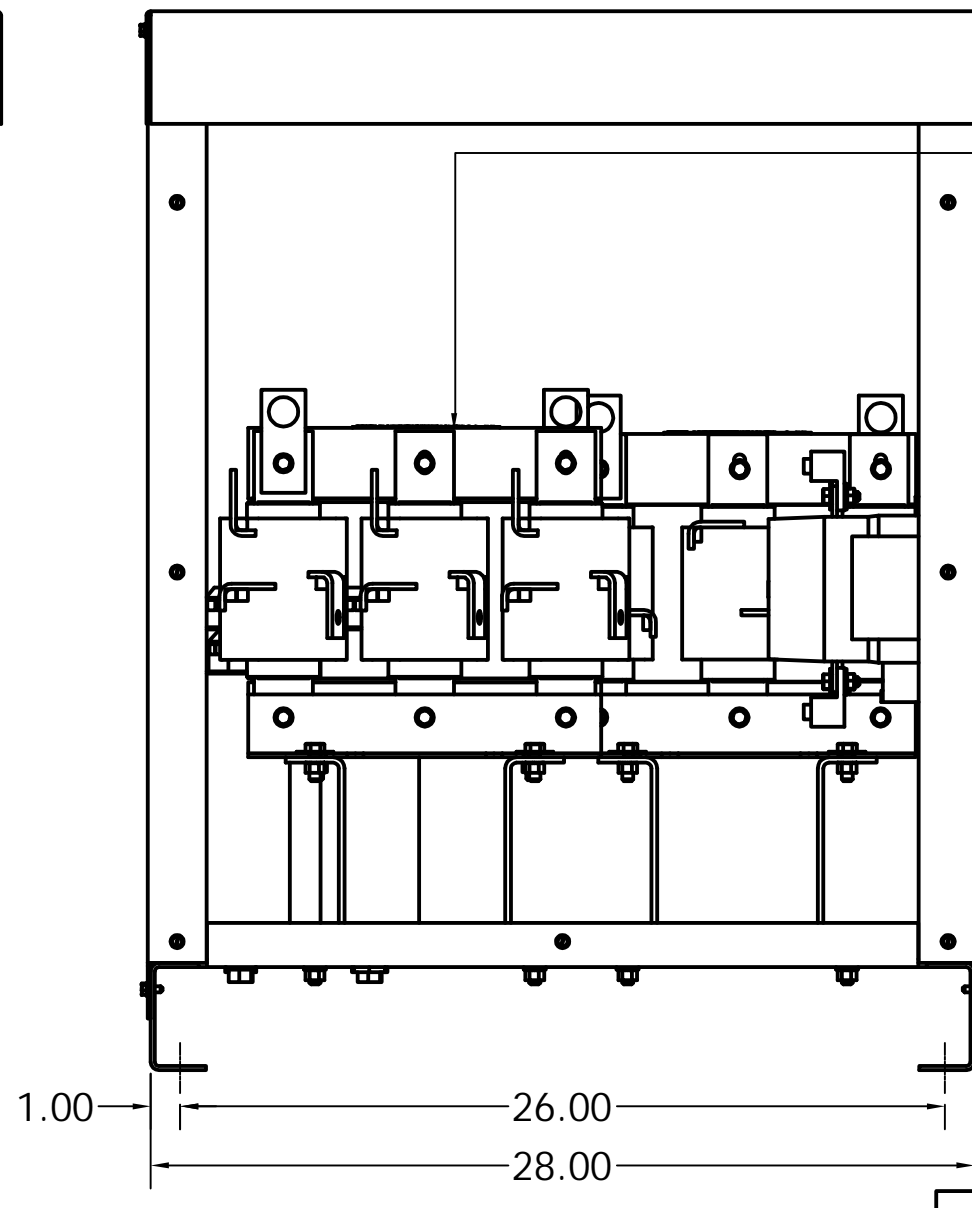
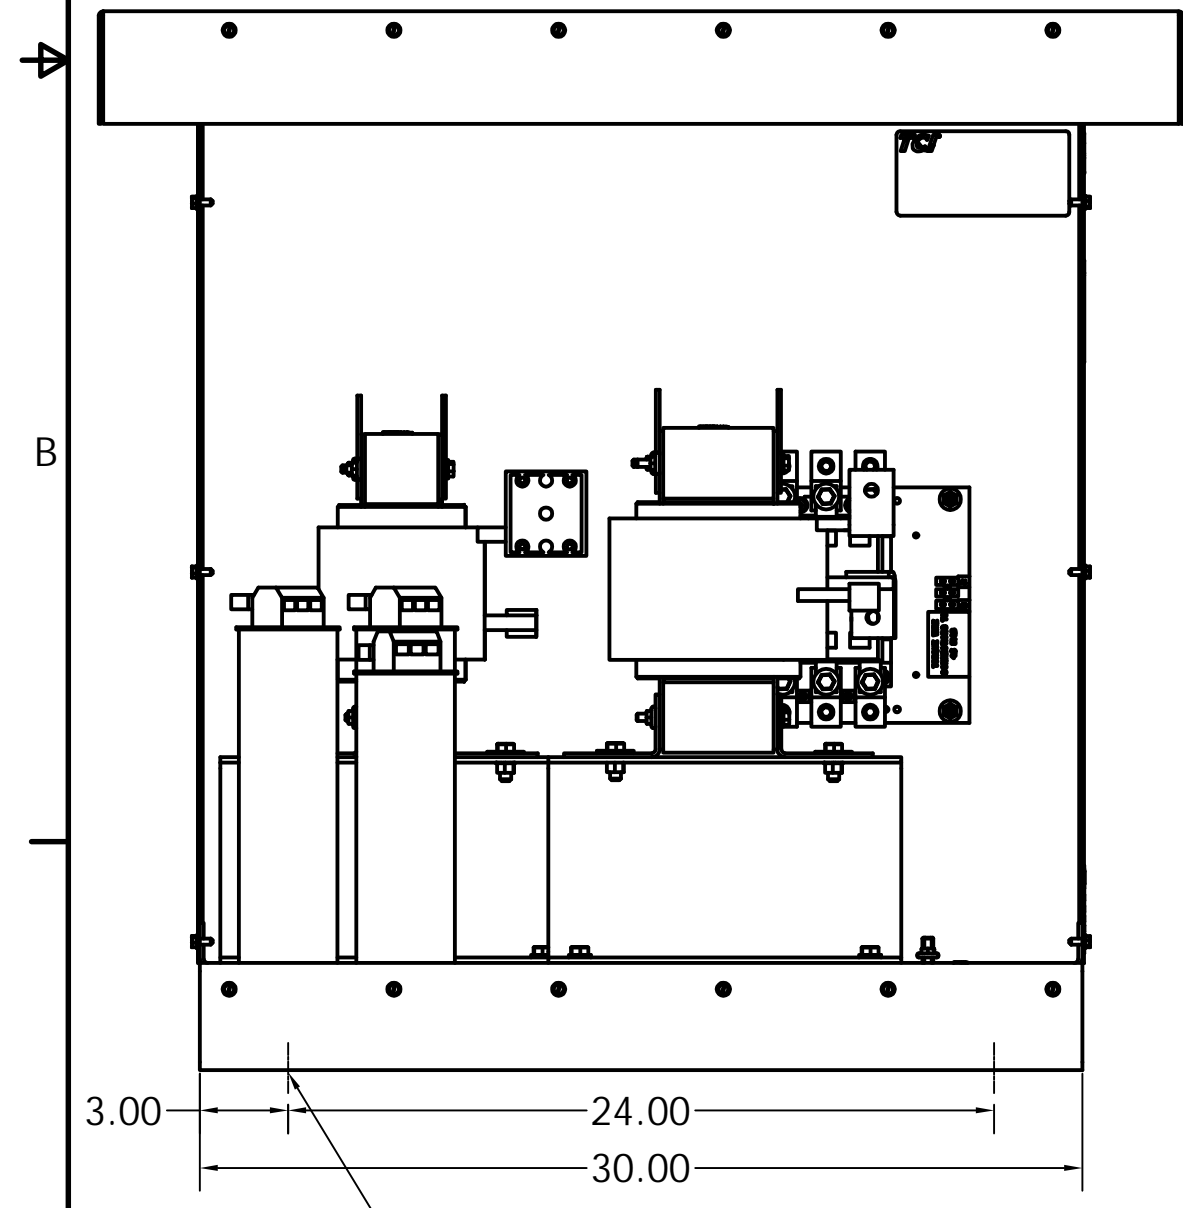
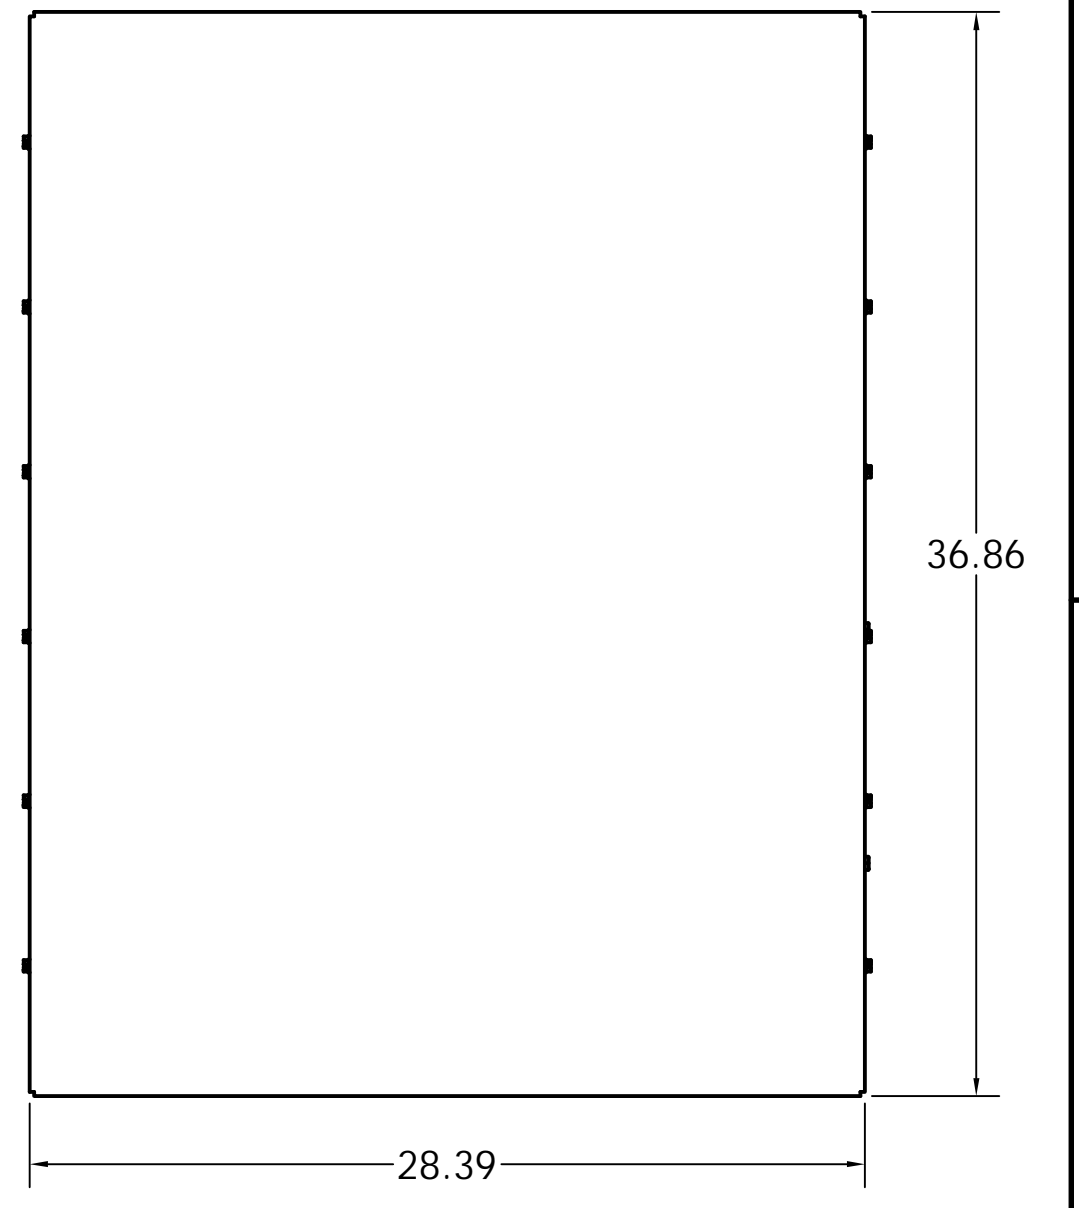


HP	Volts	Phase	Hz.	Harmonic	Kvar	Contactor	Weight	Line Reactor Terminal Hole Size.
200	600	3	60	5TH	60	Without	500lbs	0.44 Dia Holes
200	600	3	60	5TH	60	With	510lbs	0.44 Dia Holes
250	600	3	60	5TH	75	Without	503lbs	0.44 Dia Holes
250	600	3	60	5TH	75	With	512lbs	0.44 Dia Holes

CUSTOMER CONNECTIONS:  
SEE IOM MANUAL FOR WIRE SIZE.  
FOR SCHEMATIC SEE DRAWING# 30047

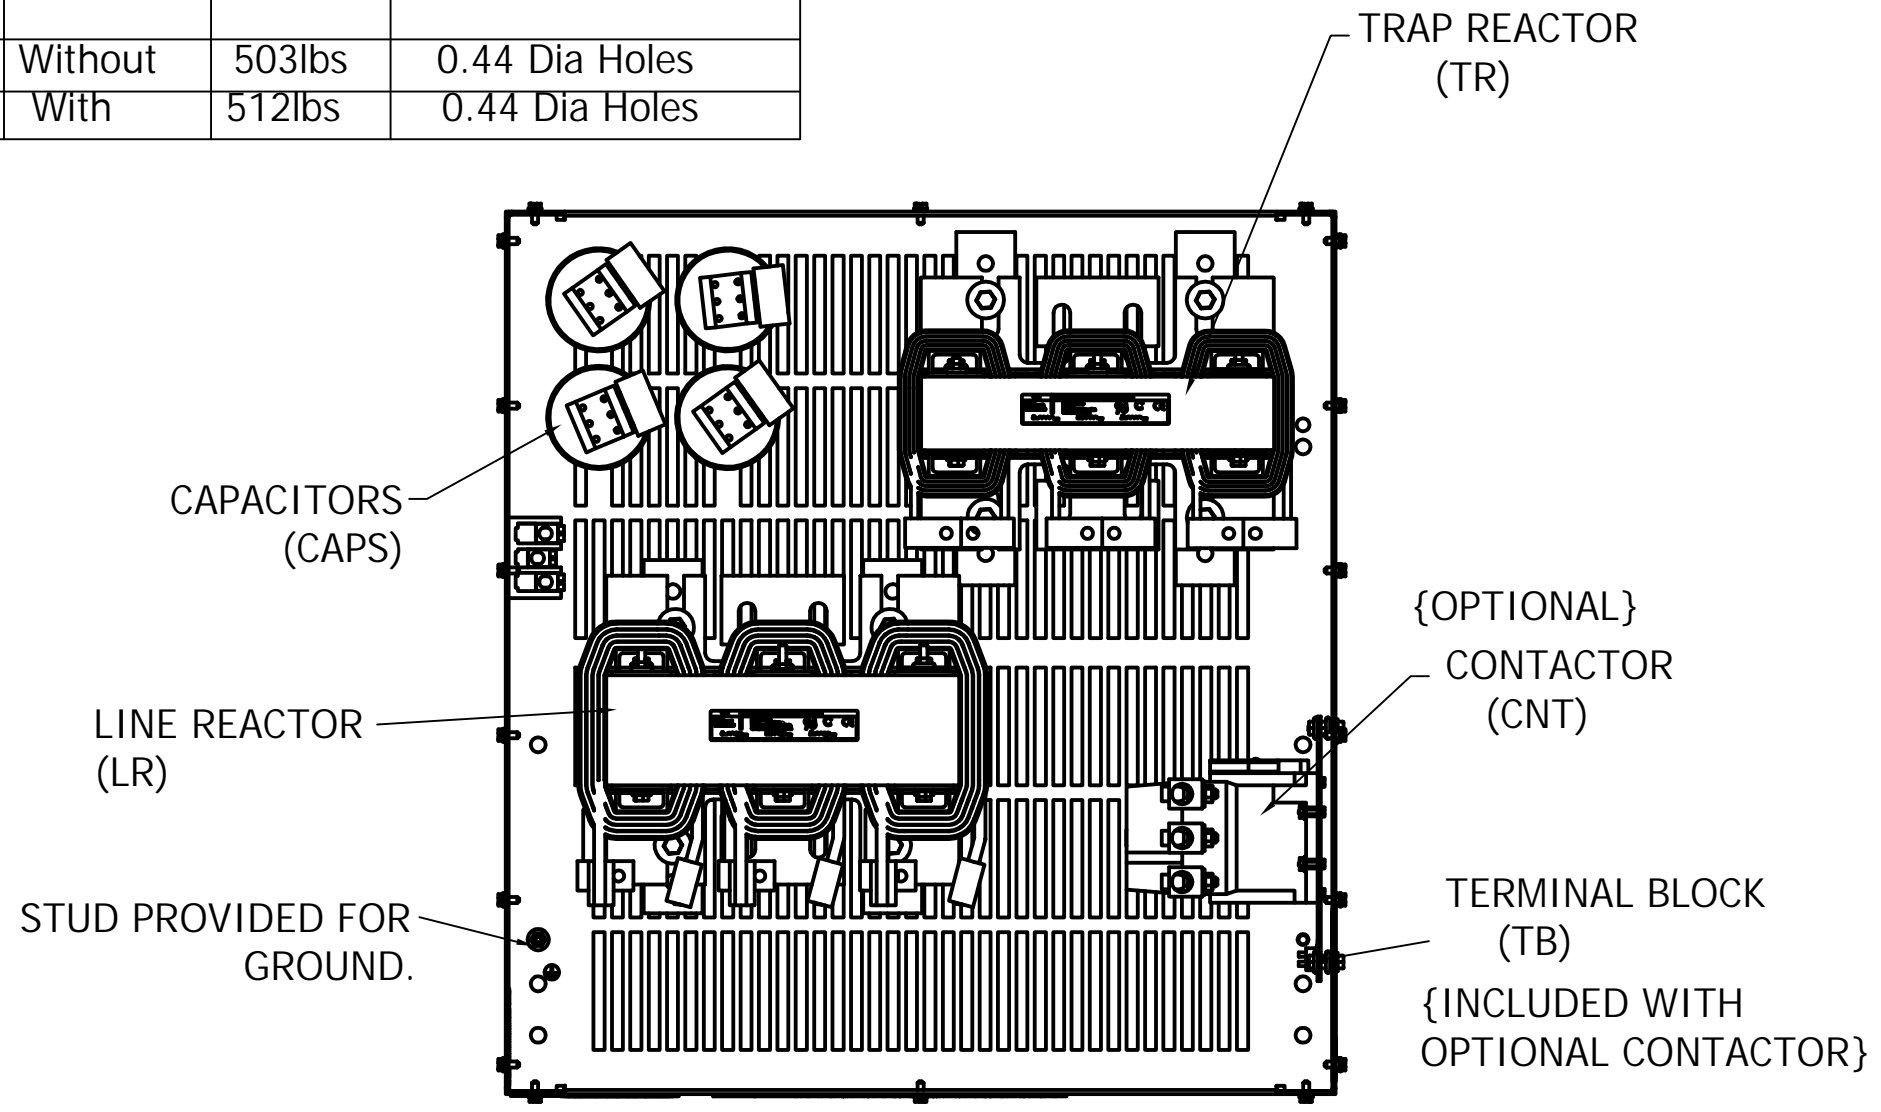

L1, 2L, L3, T1, T2, T3  
SUGGESTED CUSTOMER WIRE  
ENTRY AND EXIT LOCATION.

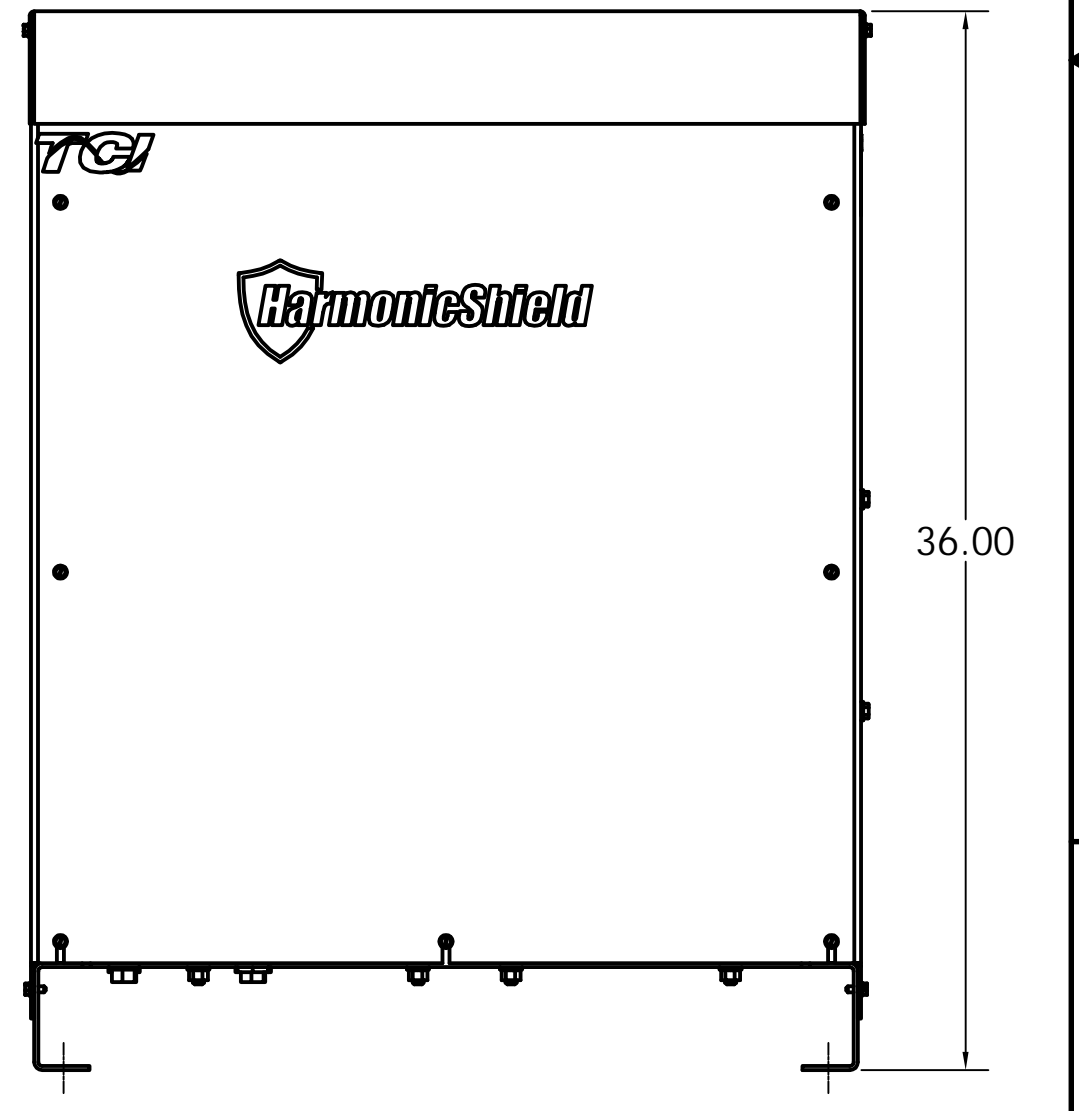

0.50 DIA MOUNTING HOLES.  
(4 PLACES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET  
ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

TOLERANCES (EXCEPT AS NOTED)	
DECIMAL	
.XX +/- .25	
.XXX +/- .1	
FRACTIONAL	
+/- 1/16	
ANGULAR	
+/- 1°	

**TCI**® W132 N10611 Grant Drive  
Germantown, WI 53022

**HarmonicShield, 600V  
200HP, 250HP**

DRN BY DSW	DATE 7/25/16	DWG. No. 106605DG
SCALE 1/6	APRVD.	SHEET 1 OF 1

NO	REVISION	DATE	BY
A	AS DESIGNED	7/25/16	DSW