
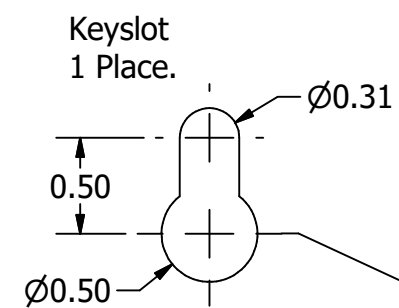
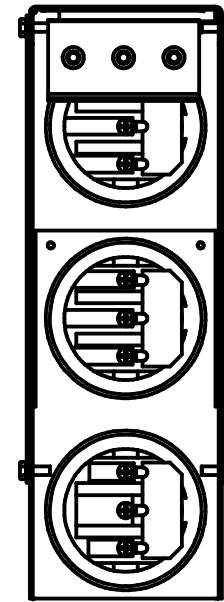






KPCUL040C63, 600V, 40kVar  
 Approx. Weight: 17 Lbs

Customer Input	
Wire Range	Tightening Torque
8-2/0 Awg	35.5 Lb-In

Cap Connection	
Wire Range	Tightening Torque
14-4 Awg	17.5 Lb-In

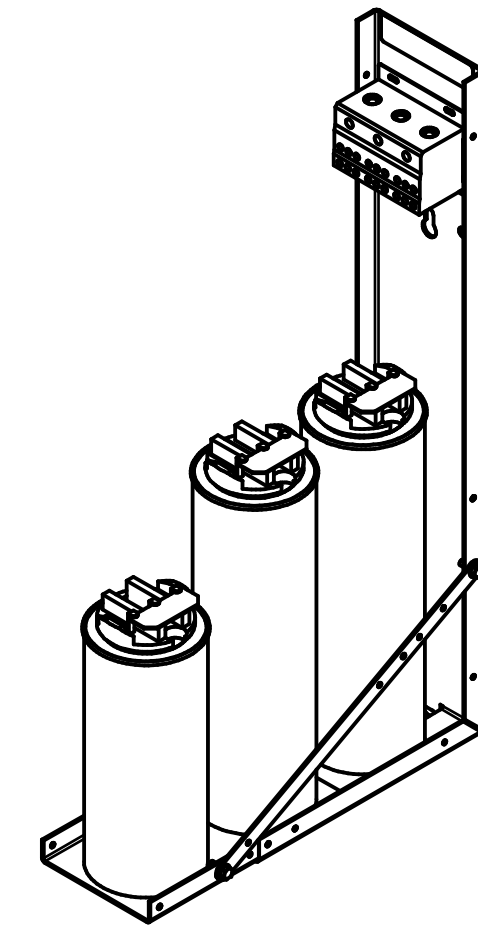

0.28 X 0.563 Slots  
3 Places.

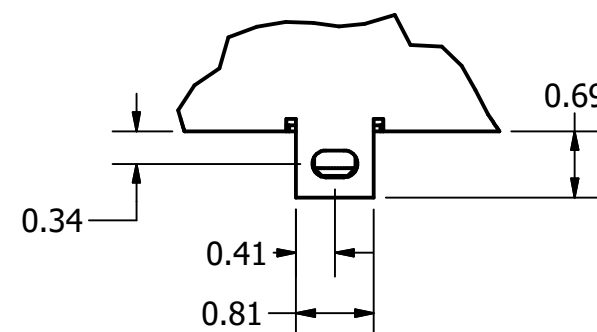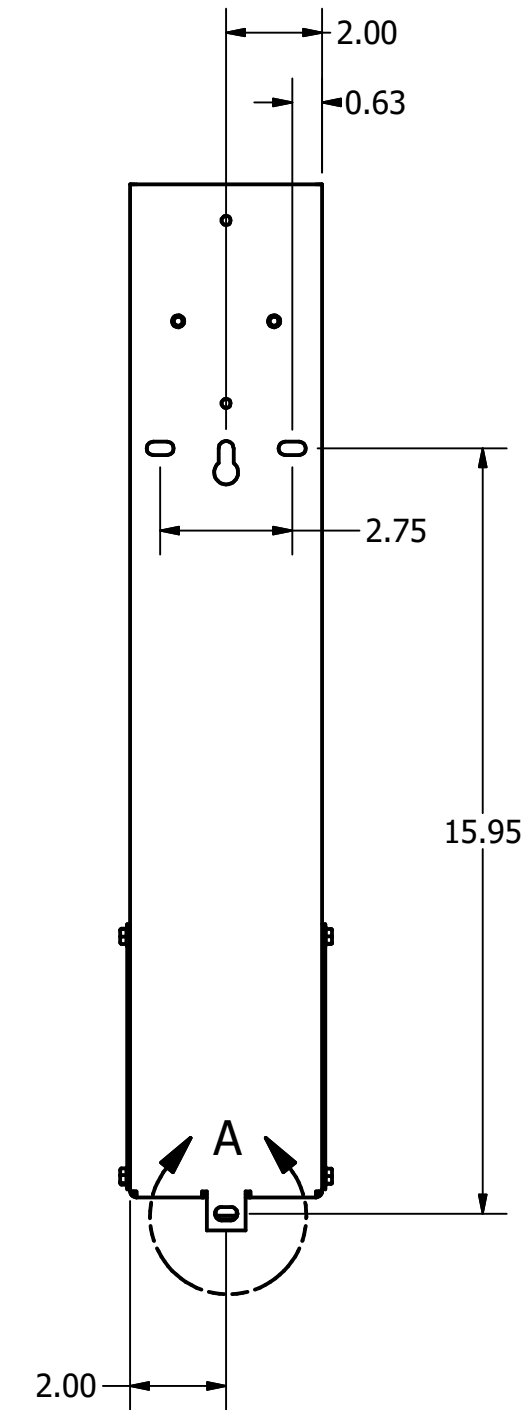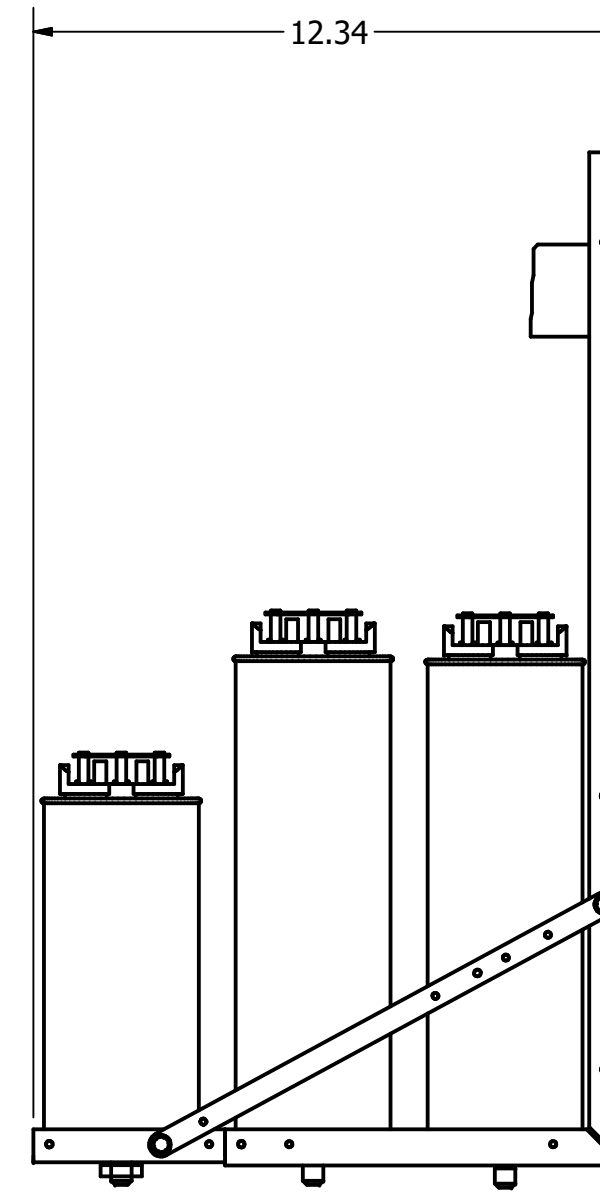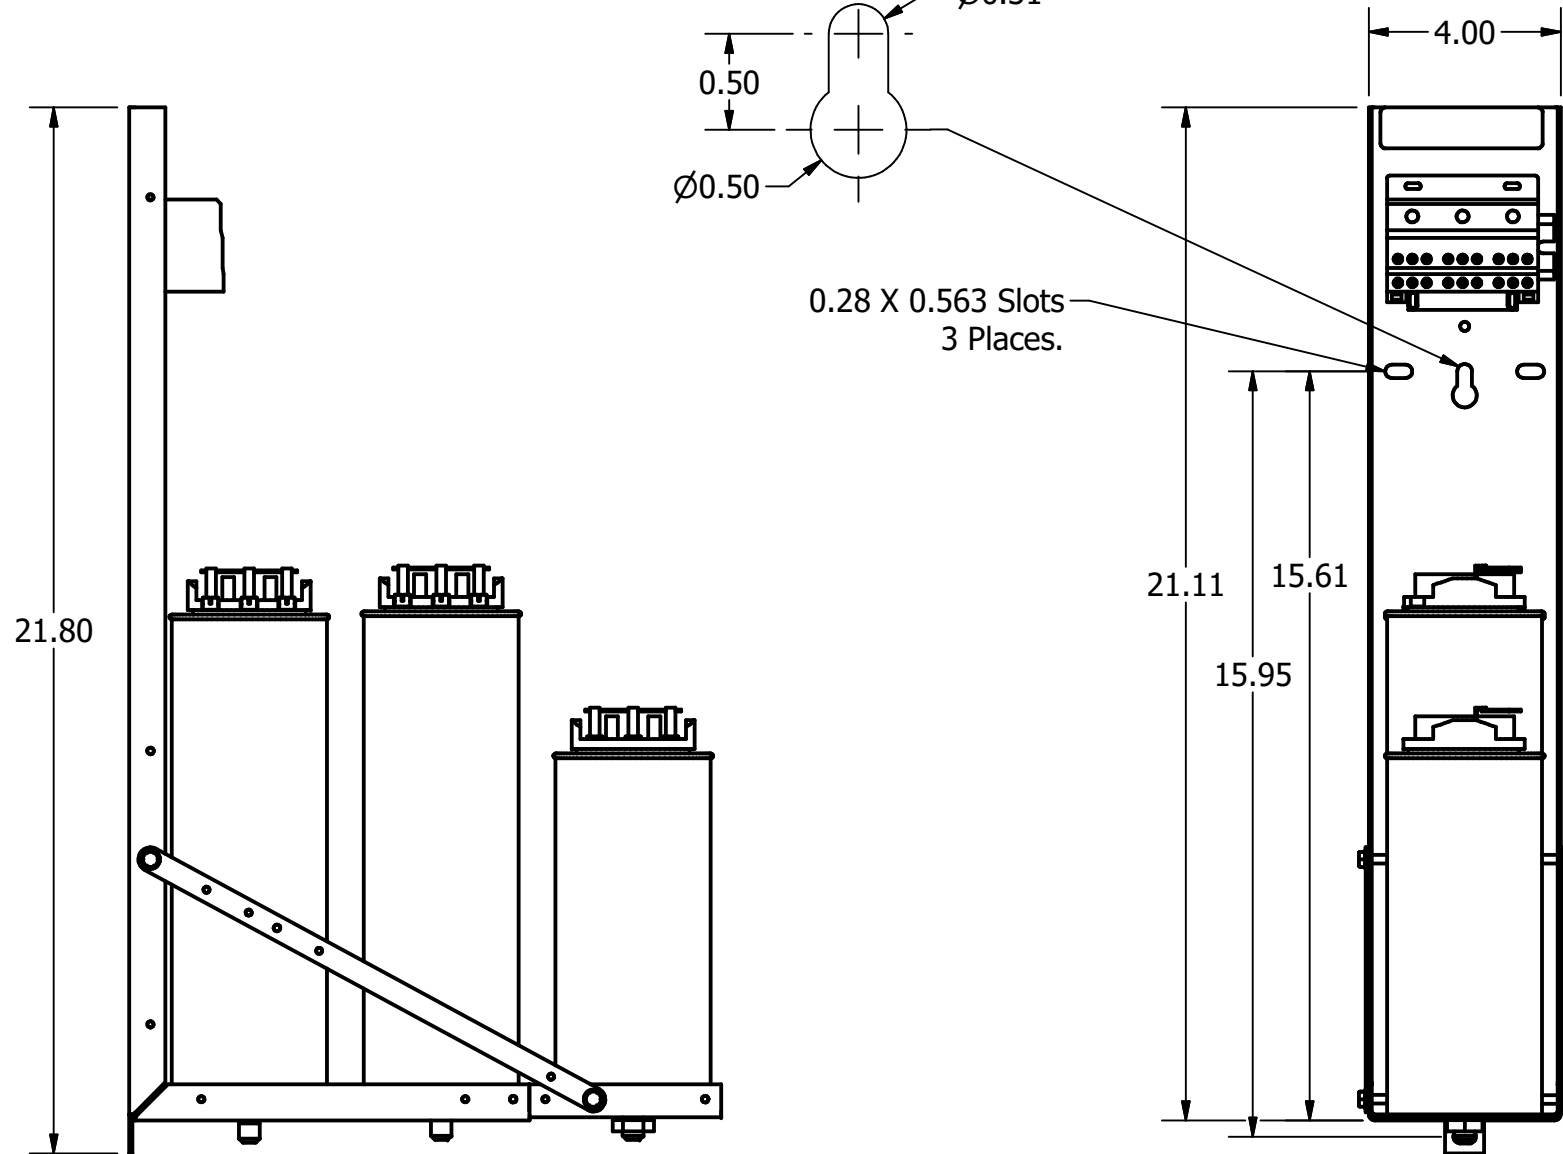

DETAIL A

Note: 27908, Manual KPC Installation Guide  
 MUST SHIP WITH EACH ASSEMBLY.

HOLE TOLERANCE ± .005

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

TOLERANCES (EXCEPT AS NOTED)			
			DECIMAL
			.XX ± .25
			.XXX ± .10
			FRACTIONAL
			± 1/16
			ANGULAR
			± 1°

**TCI** W132 N10611 Grant Drive  
 Germantown, WI 53022

KPCUL040C63, 250HP, 40kVar  
 Panelized Caps, Low C And Sine Wave

DRN BY: JRN DATE: 10/17/2017 107371DG  
 SCALE: APRVD: SIZE: C

NO	REVISION	DATE	BY
A	As Designed	10/17/2017	JRN