
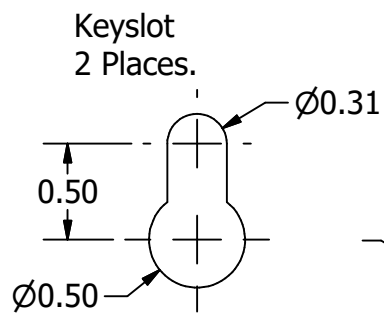
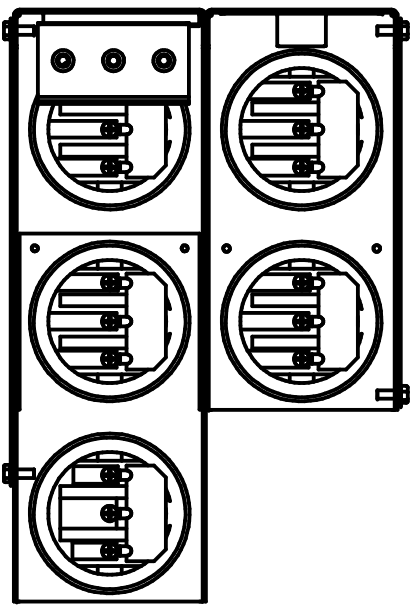





KPCUL070C63, 600V, 70kVar,
Approx. Weight: 26 Lbs

Customer Input	
Wire Range	Tightening Torque
8-2/0 Awg	35.5 Lb-In


Cap Connection	
Wire Range	Tightening Torque
14-4 Awg	17.5 Lb-In

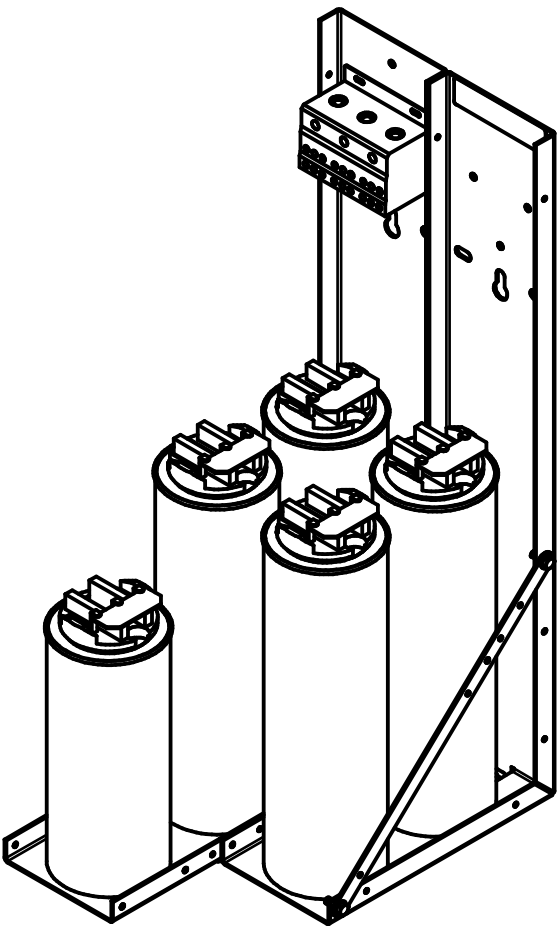


0.28 X 0.563 Slots
6 Places.

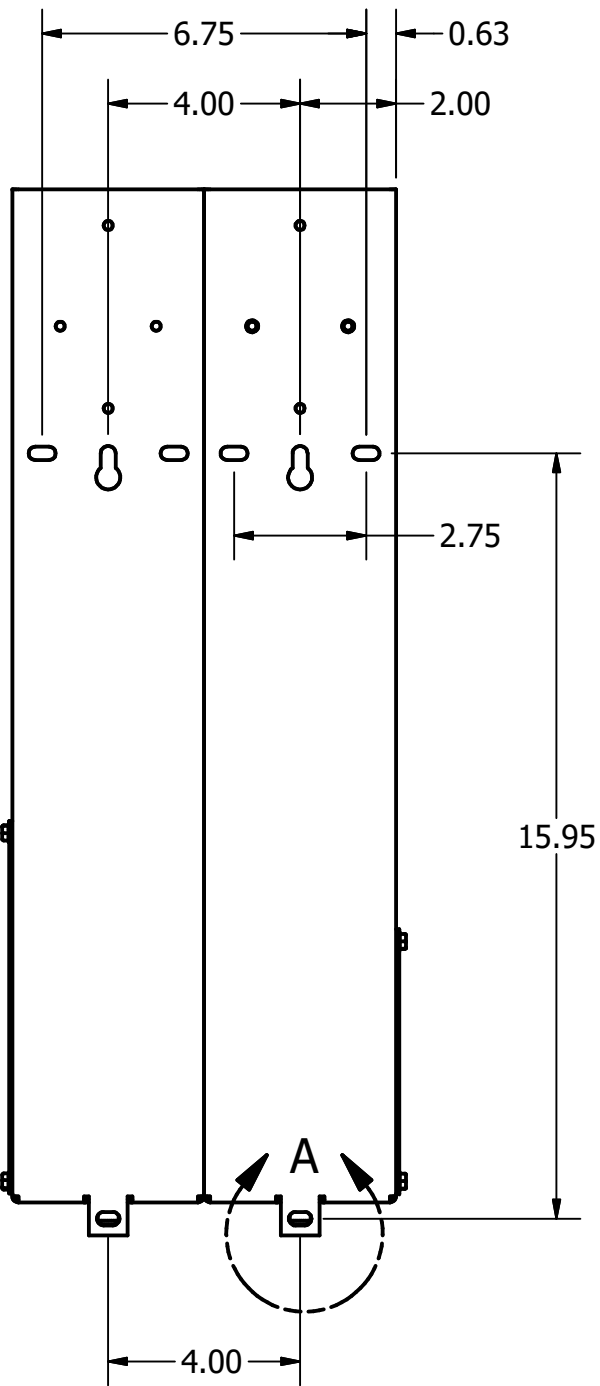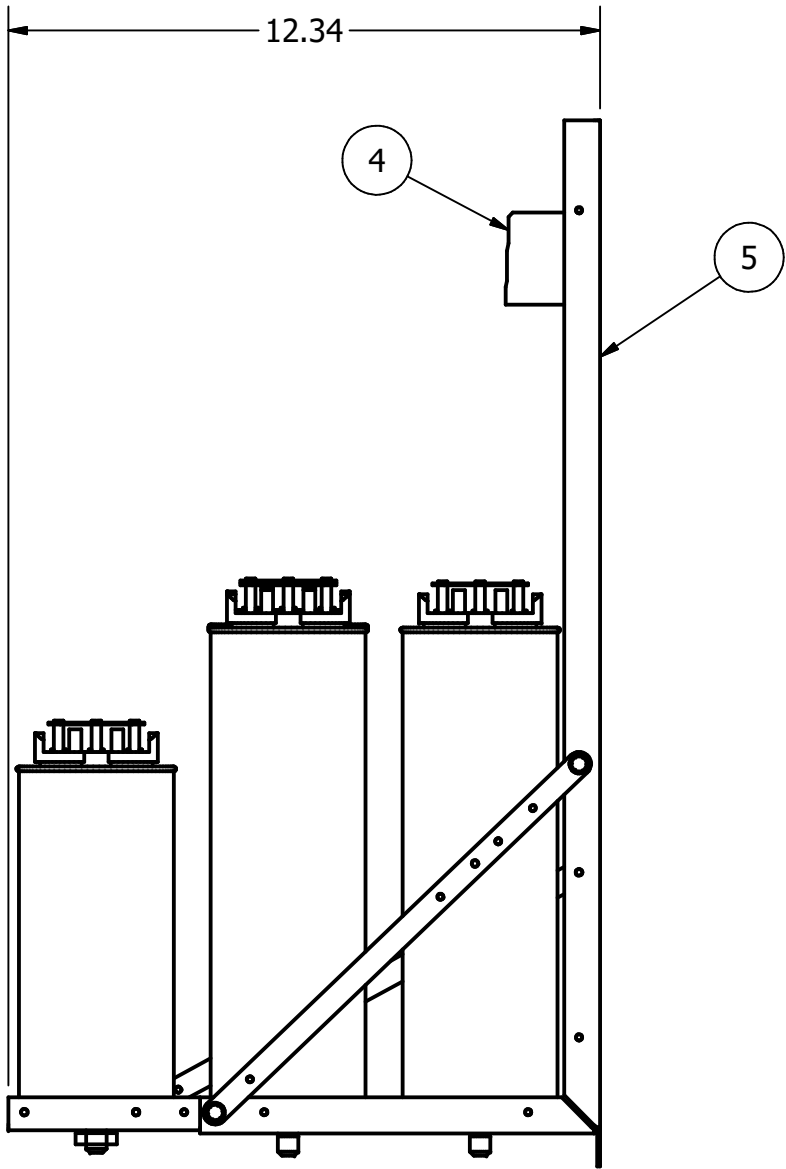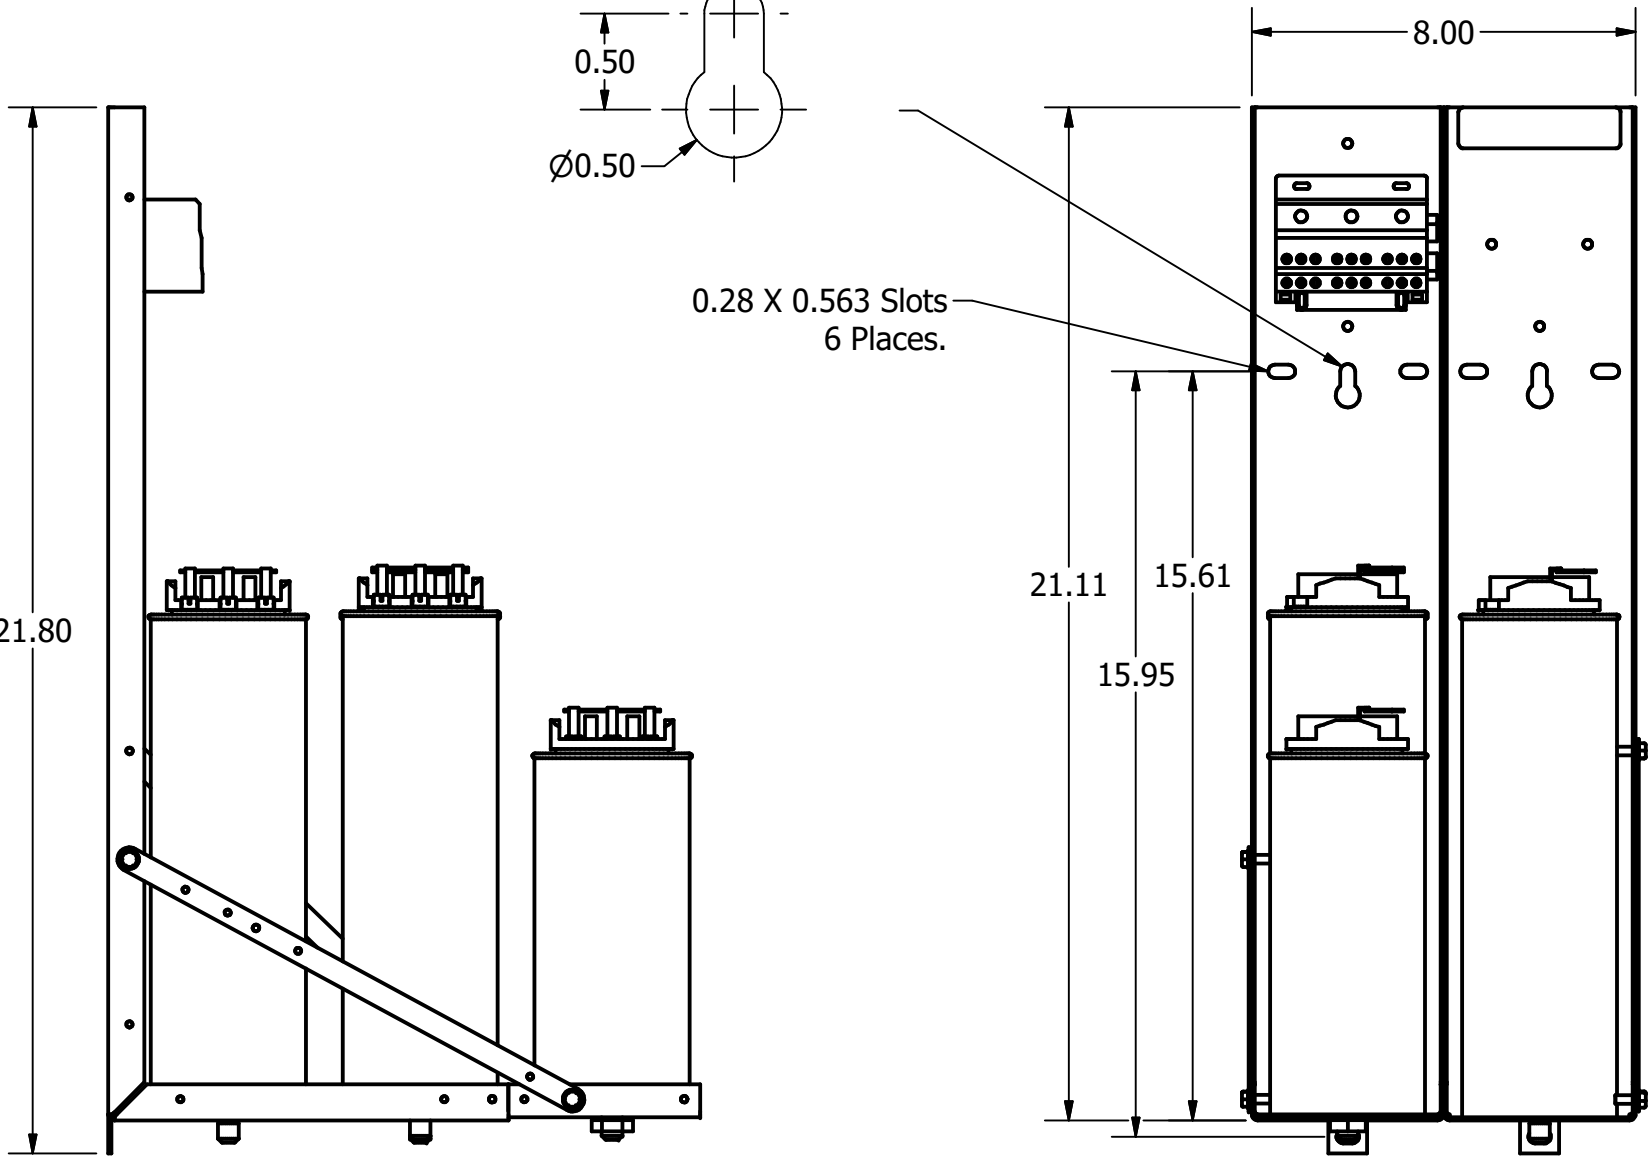

Note: 27908, Manual KPC Installation Guide
MUST SHIP WITH EACH ASSEMBLY.

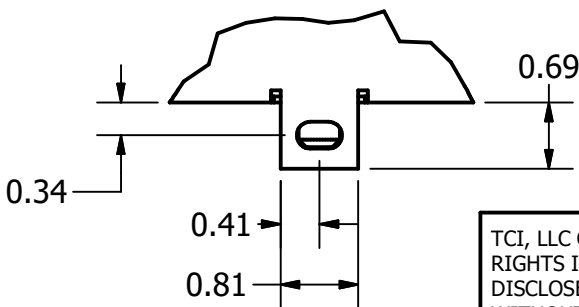

DETAIL A

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022			
					DECIMAL				
						.XX ± .25 .XXX ± .10	KPCUL070C63, 450HP, 70kVar Panelized Caps, Low C and Sine Wave		
					FRACTIONAL				
						± 1/16			
	A	As Designed	10/16/2017	JRN		ANGULAR ± 1°	DRN BY JRN	DATE: 10/16/2017	107375DG
NO	REVISION	DATE	BY			SCALE:	APRVD:	SIZE C	SHT. 1 OF 1