

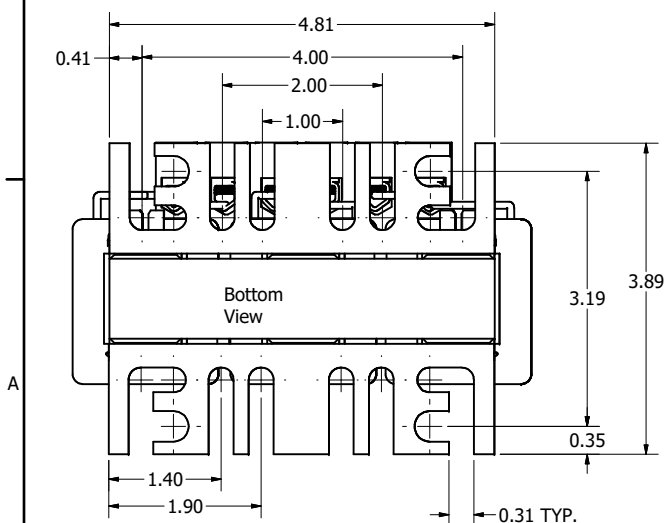
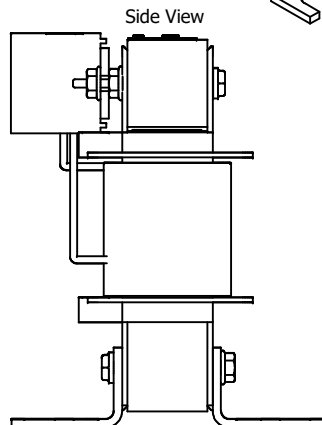
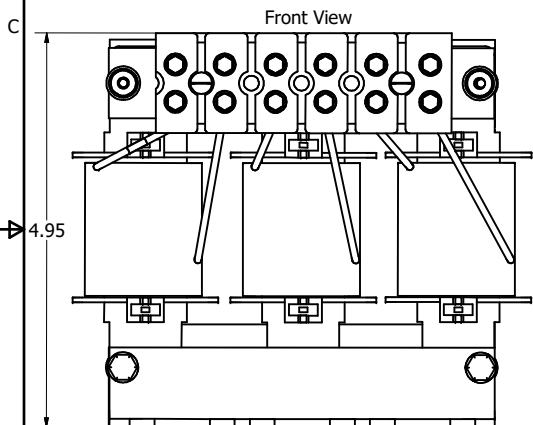


(Customer Connections) Markings On Terminal Block For Reference Only.

Wire Range: 4-18 AWG.  
Torque : 20 IN-LBS (2.3 Nm)

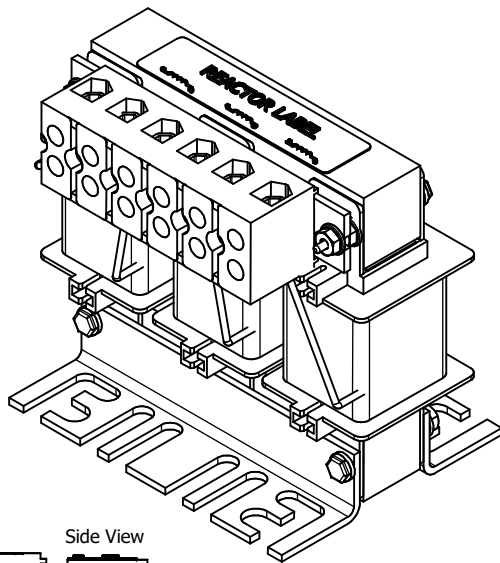

208/240 Rated Voltage, 600 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB25H	5	16.7	17	53	1030	8
KDRULB26H	7 1/2	24.2	26	67	699	8

208/240 Rated Voltage, 600 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB22L	5	16.7	19	39	626	8
KDRULB23L	7 1/2	24.2	25	48	434	8

480 Rated Voltage, 600 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB2H	15	21	24	105	1690	7

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB2L	15	21	25	65	912	8
KDRULB1L	20	27	30	79	694	8

480 Rated Voltage, 600 Max Voltage, Output						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB1P	10	14	16	64	701	7

575 Rated Voltage, 600 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB42H	7 1/2	9	10	61	5370	8
KDRULB43H	10	11	11	70	4340	8
KDRULB44H	15	17	18.5	73	2630	8

575 Rated Voltage, 600 Max Voltage, Low Z, Impedance.						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Losses (W)	Inductance (uH)	Weight (LBS)
KDRULB45L	15	17	19.5	66	1590	8
KDRULB44L	20	22	24	71	1280	8
KDRULB43L	25	27	30	77	883	8

**TCL** (800) 824-8282 [transcoil.com](http://transcoil.com)

TCL, LLC  
Germantown, WI, USA  
[transcoil.com](http://transcoil.com)  
800-824-8282

KDRUL Drive Reactor  
KDRUL — Motor Amps —  
3PH, 0/1/2/3 — 1/ Rated, 600V Max, -A Max  
40C Amb Max, 150C Rise, RoHS  
Term Torque — 20-in

UL LISTED  
cULus LISTED

- Notes:
1. UL file number: cULus Listed File E116124.
  2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
  3. KDR IOM Manual Part Number 30895
  4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
  5. Material(s) Shall be RoHS Compliant
  6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°				W182N10611 (Rev 1) Feb 2024 Germantown, WI 53022 © 2024 TCL, LLC An Official Motors Group Company KDRUL B Frame, Terminal Block Reactor Drawing DWN BY: DSW DATE: 1/22/18 107511-2DG SCALE: 1:1.2 DRWN: JSC SHEET 1 OF 1	
REV	6688, Max Amp Change	6/18/2024	DSW						
NO	REVISION	DATE	BY						