


208/240 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULJ23L	150	396	420	25.5	74	401	SLK13
KDRULJ24L	200	528	534	21.8	74	442	SLK14

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULJ2L	350	414	450	44	74	465	SLK14
KDRULJ1L	400	477	520	37.5	74	470	SLK14

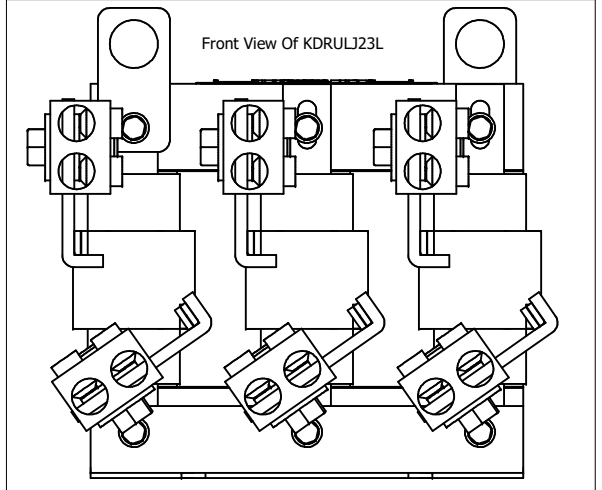

TCL (800) 824-8282 transcoil.com

TCL, LLC
Germanstown, WI, USA
transcoil.com
800-824-8282

KDRUL Drive Reactor
KDRUL— Motor Amps—
3PH, 50/60Hz, —V Rated, 600V Max, —A Max
40C Amb Max, 185C Rise, Ref'd
Turn Torque— lb-in

UL LISTED CE
3rd Class, 10, 2000

DATE CODE: A1 B1 C1

- Note:
1. UL file number: cULus Listed File E116124.
 2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. For Terminal Torques And Wire Size See, KDR IOM Manual, Part Number 30895
 4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
 5. Material(s) Shall be RoHS Compliant
 6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY	SCALE

TOLERANCES (EXCEPT AS NOTED)		DATE		SCALE	
DECIMAL	.XX ± .25 .XXX ± .10	6/13/2024	DSW	1/2.2	DSW
FRACTIONAL	± 1/16	10/23/20	DSW		
ANGULAR	± 1°	2/28/18	DSW		

W132N10611 (Rev'd 11/16)
 Germanstown, WI 53022
 © 2024 TCL, LLC
 An Official Motors Group
 KDRUL J Frame, Copper Bus
 Reacto Drawing
 DWN BY: DSW DATE: 2/28/18 107536-8DG
 SCALE: 1/2.2 DRAWN BY: DSW
 SHEET 1 OF 1