

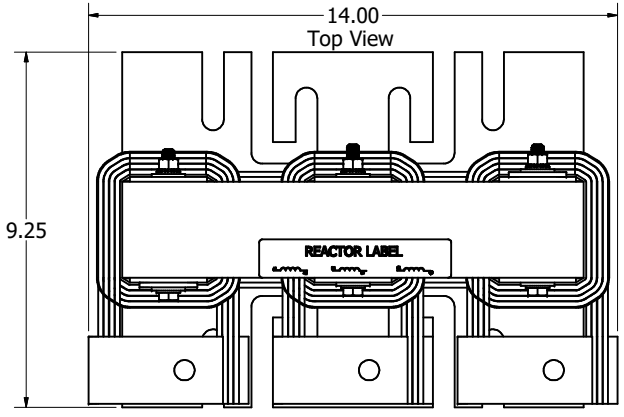
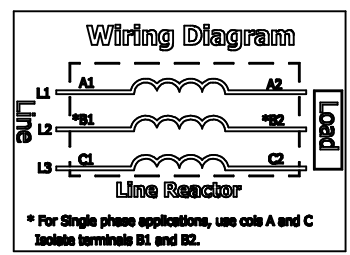
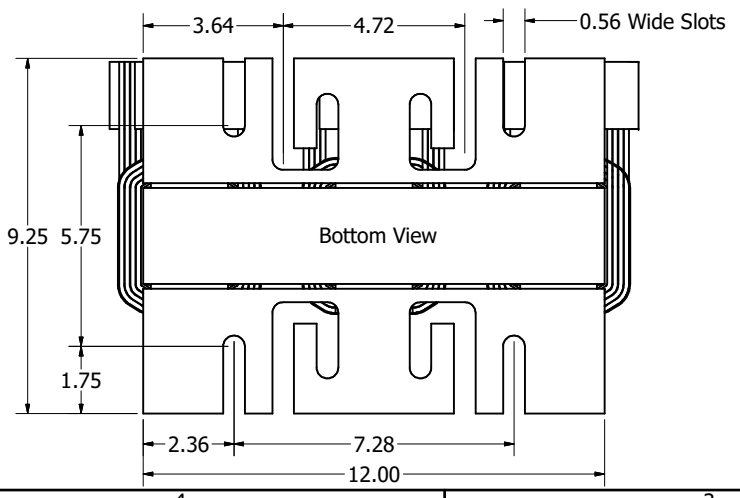
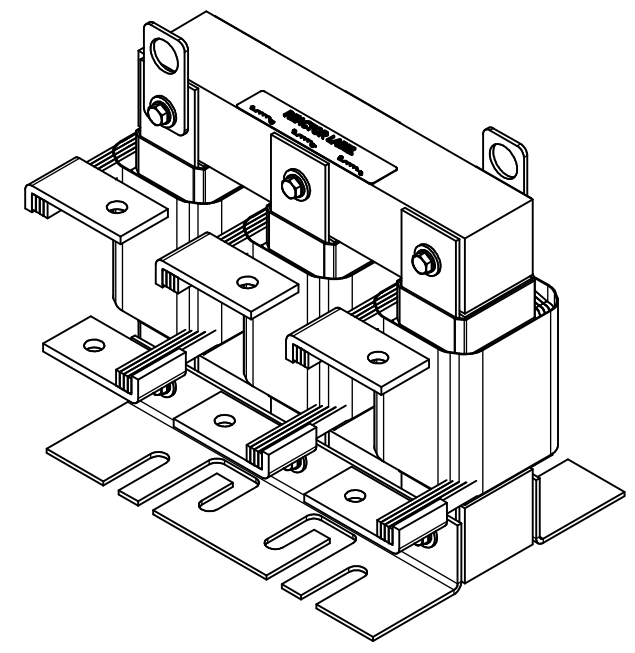


480 Rated Voltage, 600 Max Voltage, High Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)	Available Lug Kit	Terminal Hole Size (Inches)
KDRL1H	250	302	310	106	548	105	SLK13	0.56
KDRL2H	300	361	365	86	786	105	SLK13	0.56
KDRL3H	350	414	435	74	750	109	SLK13	0.53
KDRL4H	400	477	480	65	730	135	SLK13	0.56

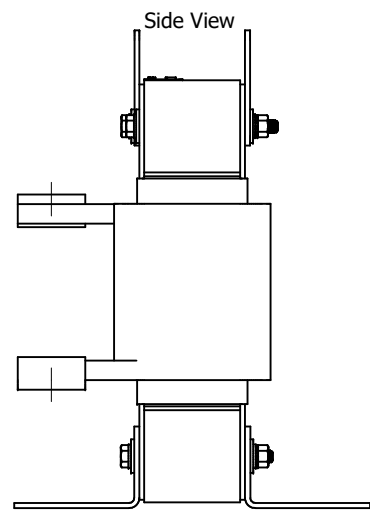

(Customer Connections)
Markings On Coils
For Reference Only.

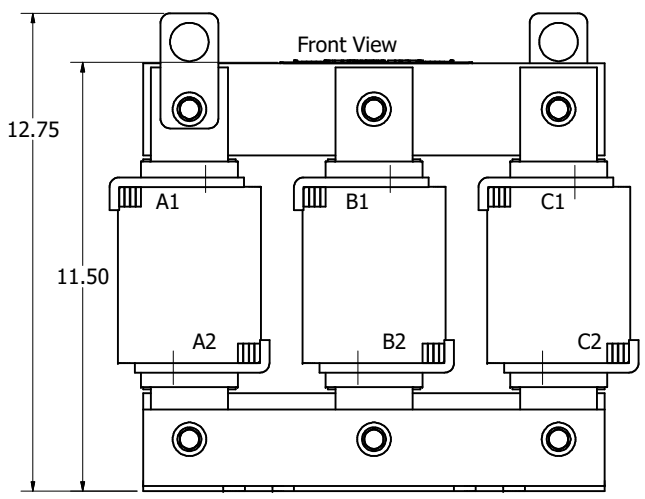

Notes:

1. KDR Lug Kits sold separately. Contact TCI.
2. UL file number: cULus Listed File E116124.
3. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
4. KDR IOM Manual Part Number 30895
5. Material(s) Shall be RoHS Compliant
6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TOLERANCES (EXCEPT AS NOTED)		THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY DSW	DATE 7/2/2024		W132N10611 Grant Drive Germantown, WI 53022 © 2024 Allient Inc.
DECIMAL .XX ± .25 .XXX ± .10	FRACTIONAL ± 1/32	ANGULAR ± 1°	NO. REVISION	DATE	BY		KDR L Frame, Copper Bus
				A 6688, 107537-5 to 107537-15	7/2/2024	DSW	107537-15DG
				NO.	REVISION	DATE	BY
				NO.	REVISION	DATE	BY