


480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULL1LE01	450	515	575	36.3	180	509	SLK14
KDRULL2LE01	500	590	610	31.5	180	518	SLK14

Suggested Customer Wire Entrance Bottom Of Enclosure.
See Note: 5
(Non Removeable Panel)

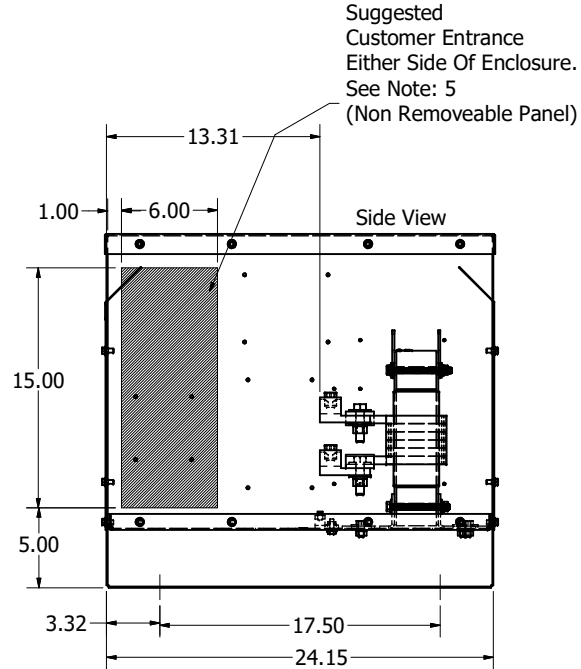

TGI (800) 824-8282 transcoll.com

TGI, LLC
Germantown, WI, USA
transcoll.com
800-824-8282

KDRUL Drive Reactor
KDR - Motor Amps -
3PH, 50/60Hz, -V Rated, 600V Max, -A Max
40C Amb Max, 1BSC Film, RoHS
Manual #30895 LUG KIT #SLK-

UL LISTED CE
330-CANEX, 90, 2000

DATE CODE A1 B1 C1

- Notes:
1. UL file number: cULus Listed File E116124.
 2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. KDR IOM Manual Part Number 30895
 4. Material(s) Shall be RoHS Compliant
 5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TOLERANCES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.	DESIGNED BY DSW	DATE 7/1/2024	SCALE 1/6	SIZE C	W132N10611 Grant Drive Germantown, WI 53022 © 2024 Allient Inc.
DECIMAL .XX ± .25 .XXX ± .10						KDRUL L Frame Enclosed Type 1
FRACTIONAL ± 1/32						
ANGULAR ± 1°						107614-14DG
		NO	REVISION	DATE	BY	SHT. 1 OF 1