
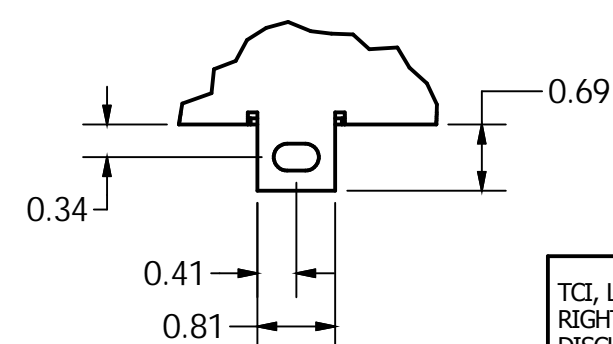
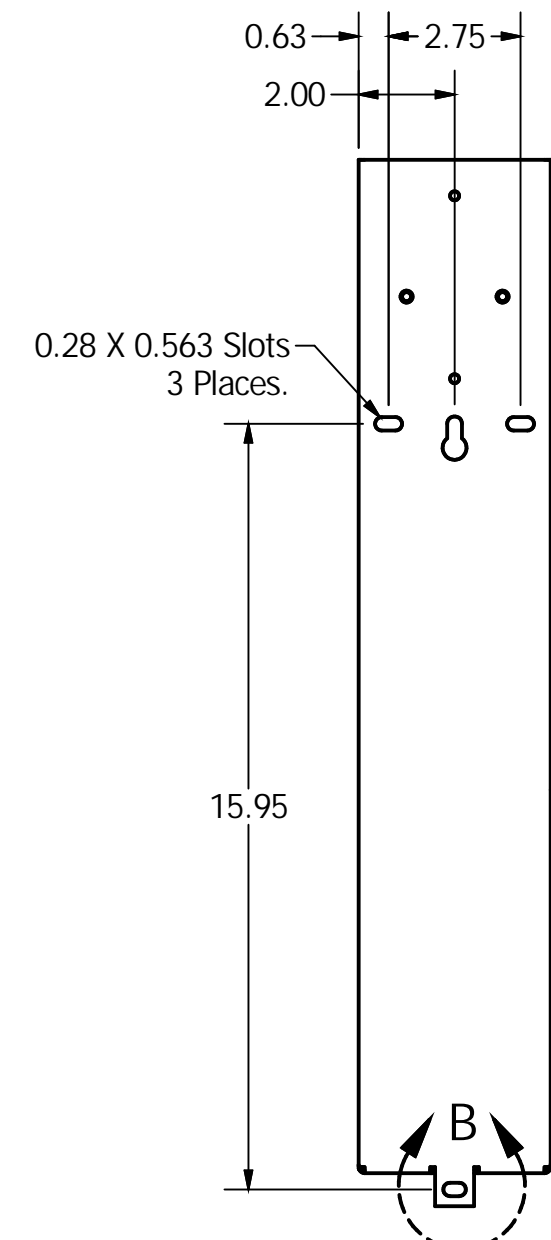
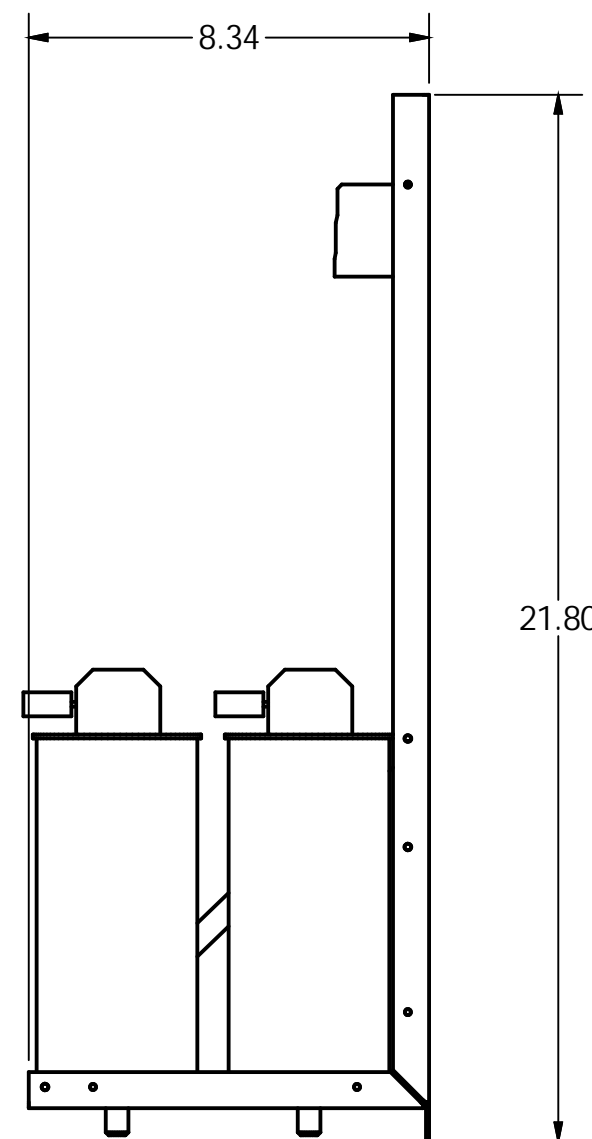
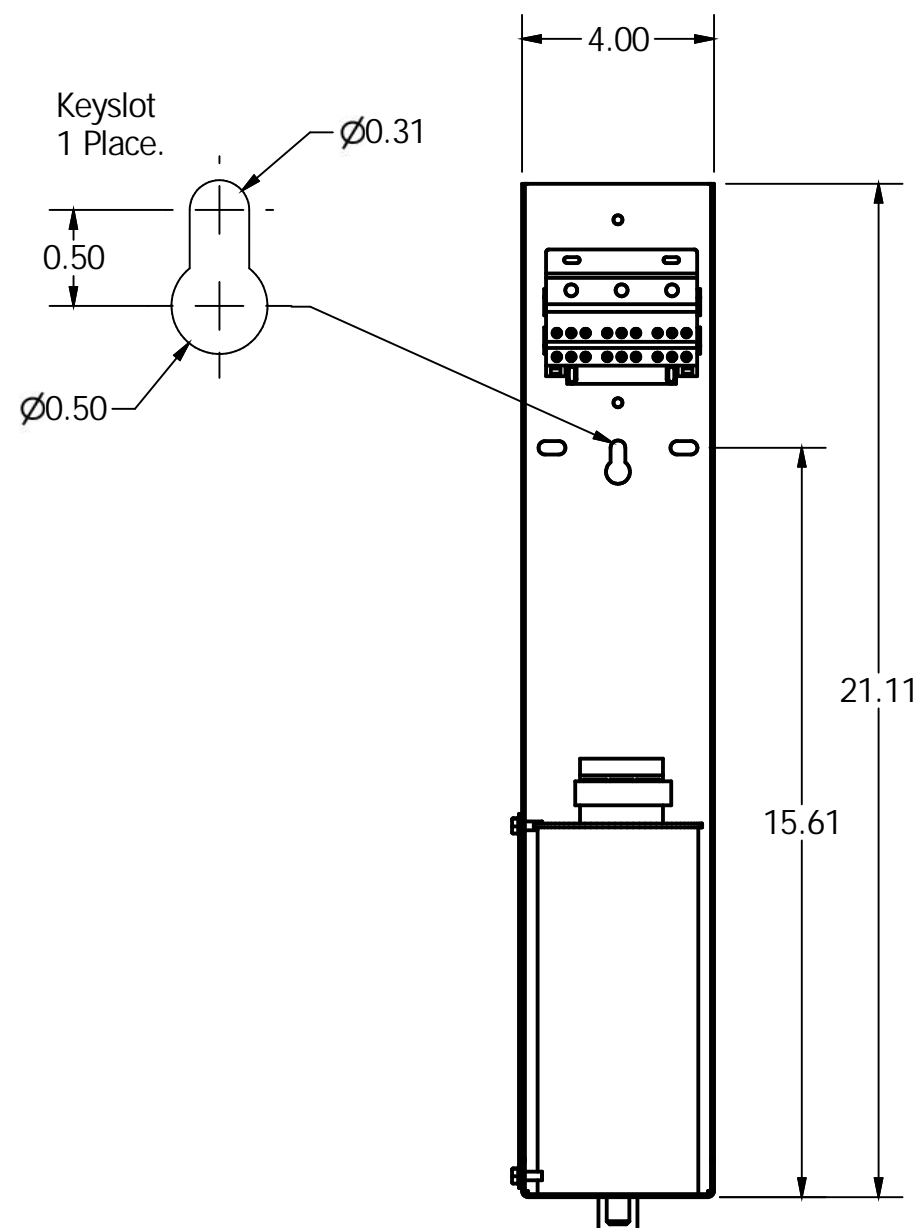
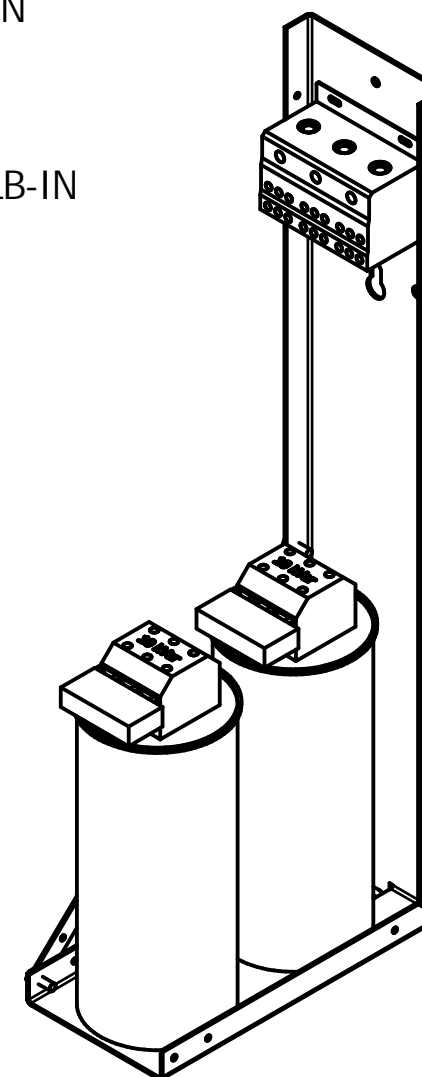


KPCUL020A64, 480V, 20kVar  
 Approx. Weight: 10 Lbs

Customer Input:  
 Terminal Block Torque (LB-IN)  
 Wire Range: (3x1) #8 Awg To #2 Awg = 31 LB-IN

Capacitor Side Of  
 Terminal Block Torque (LB-IN)  
 Wire Range: (3x6) #14 Awg To #4 Awg = 17.5 LB-IN

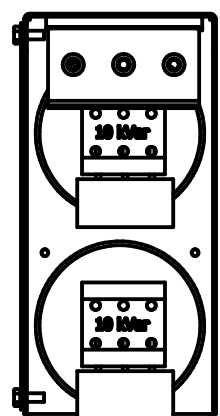

Note: 27908, Manual KPC Installation Guide  
 MUST SHIP WITH EACH ASSEMBLY.

|   |  |          |     |                              |  |  |
|---|--|----------|-----|------------------------------|--|--|
| TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THERE IN WITHOUT WRITTEN PERMISSION FROM TCI. |  |          |     | TOLERANCES (EXCEPT AS NOTED) |  | <b>TCI</b> W132 N10611 Grant Drive<br>Germantown, WI 53022 |
|   |  |          |     | DECIMAL                      |  |  |
| A As Designed   |  | 03/26/18 | JRN | FRACTIONAL                   |  | DRN BY   |
| NO REVISION   |  | DATE     | BY  | ANGULAR                      |  | DATE   |
|   |  |          |     | ± 1°                         |  | APRVD:   |
|   |  |          |     |                              |  | SCALE: To Fit  |
|   |  |          |     |                              |  | SIZE   |
|   |  |          |     |                              |  | C  |
|   |  |          |     |                              |  | SHT. 1 OF 1  |