
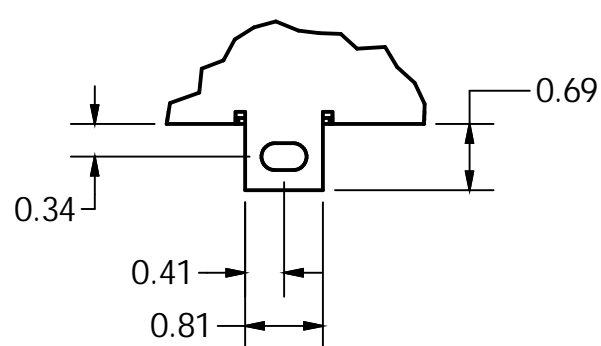
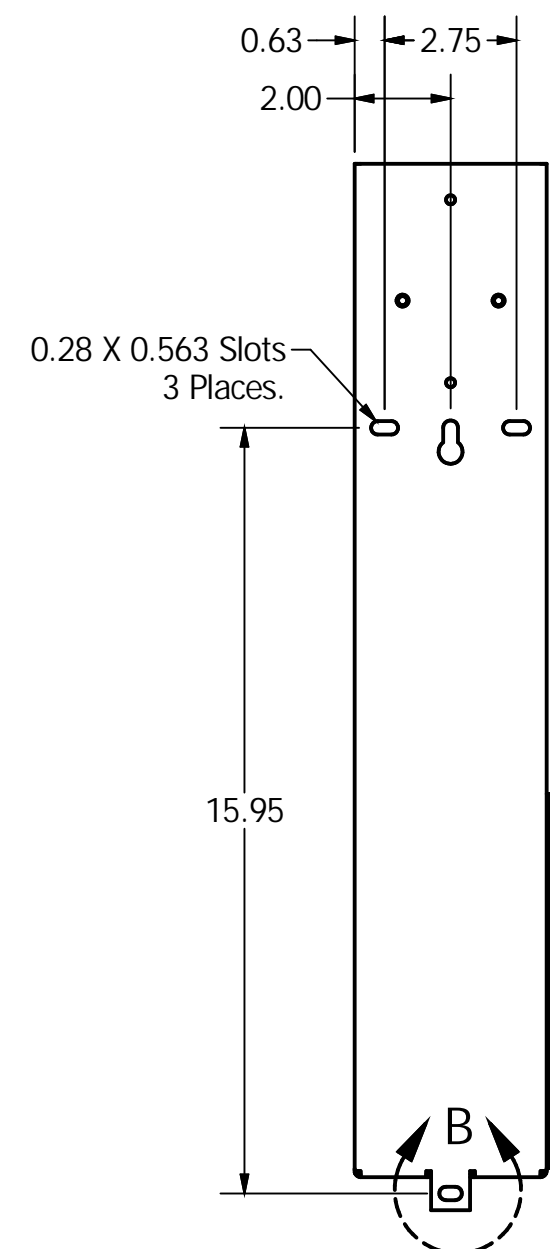
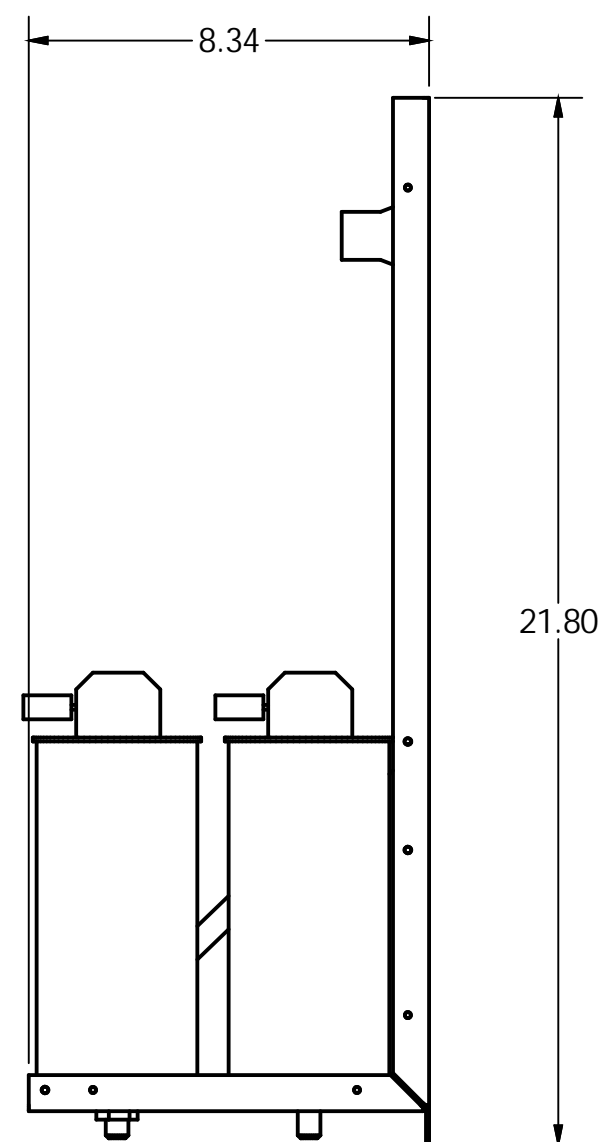
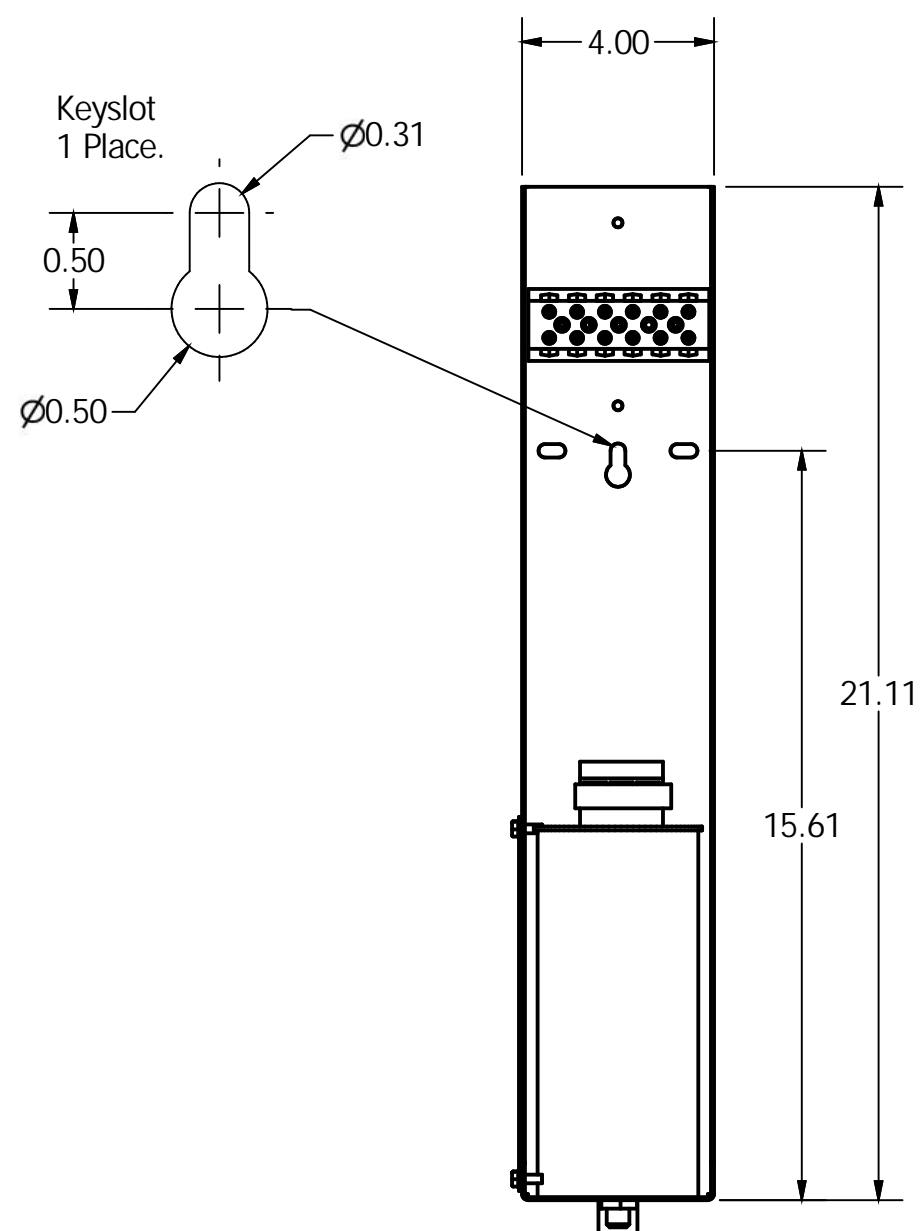
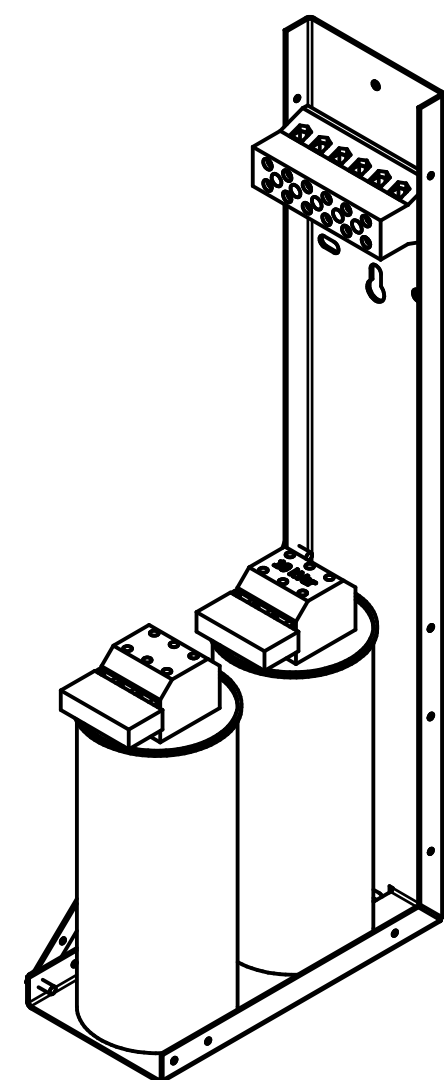


KPCUL018A64, 480V, 18kVar
 Approx. Weight: 10 Lbs


Customer Input	
Wire Range	Tightening Torque
1-4	35 In-Lb
6-14	30 In-Lb
16-20	25 In-Lb
22	20 In-Lb

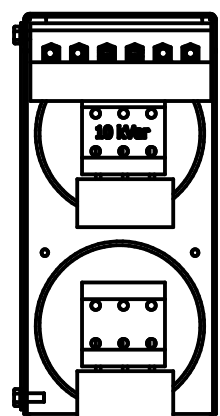

DETAIL B

Note: 27908, Manual KPC Installation Guide
 MUST SHIP WITH EACH ASSEMBLY.

HOLE TOLERANCE ± .005

				TOLERANCES (EXCEPT AS NOTED)		 W132 N10611 Grant Drive Germantown, WI 53022	
				DECIMAL		KPCUL018A64, 18 kVar.	
				.XX ± .03		Panelized Caps,	
				.XXX ± .010			
				FRACTIONAL			
				± 1/32			
A As Designed		04/03/18	JRN	DRN BY JRN		DATE 04/03/18	107645DG
NO REVISION		DATE	BY	SCALE To Fit		APRVD:	SIZE C
				ANGULAR		SHT. 1 OF 1	
				± 1°			