
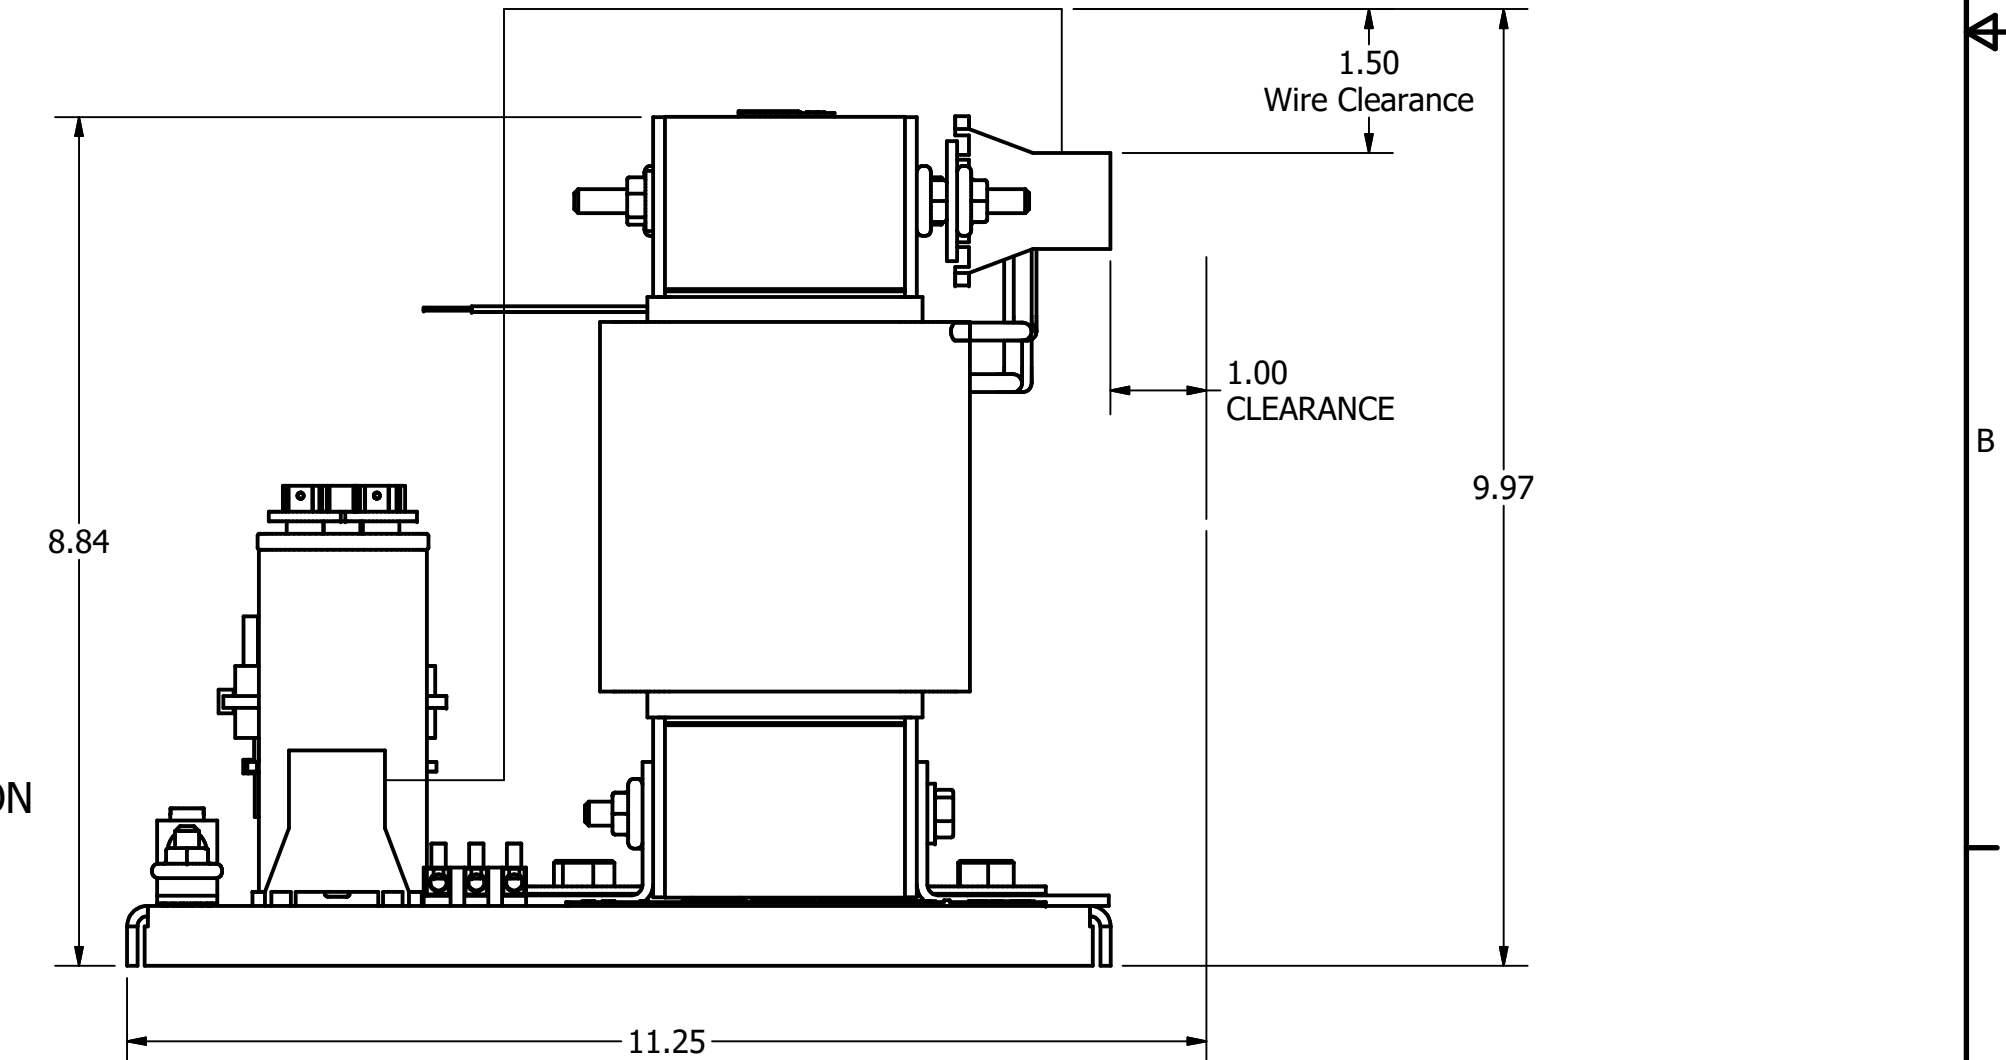
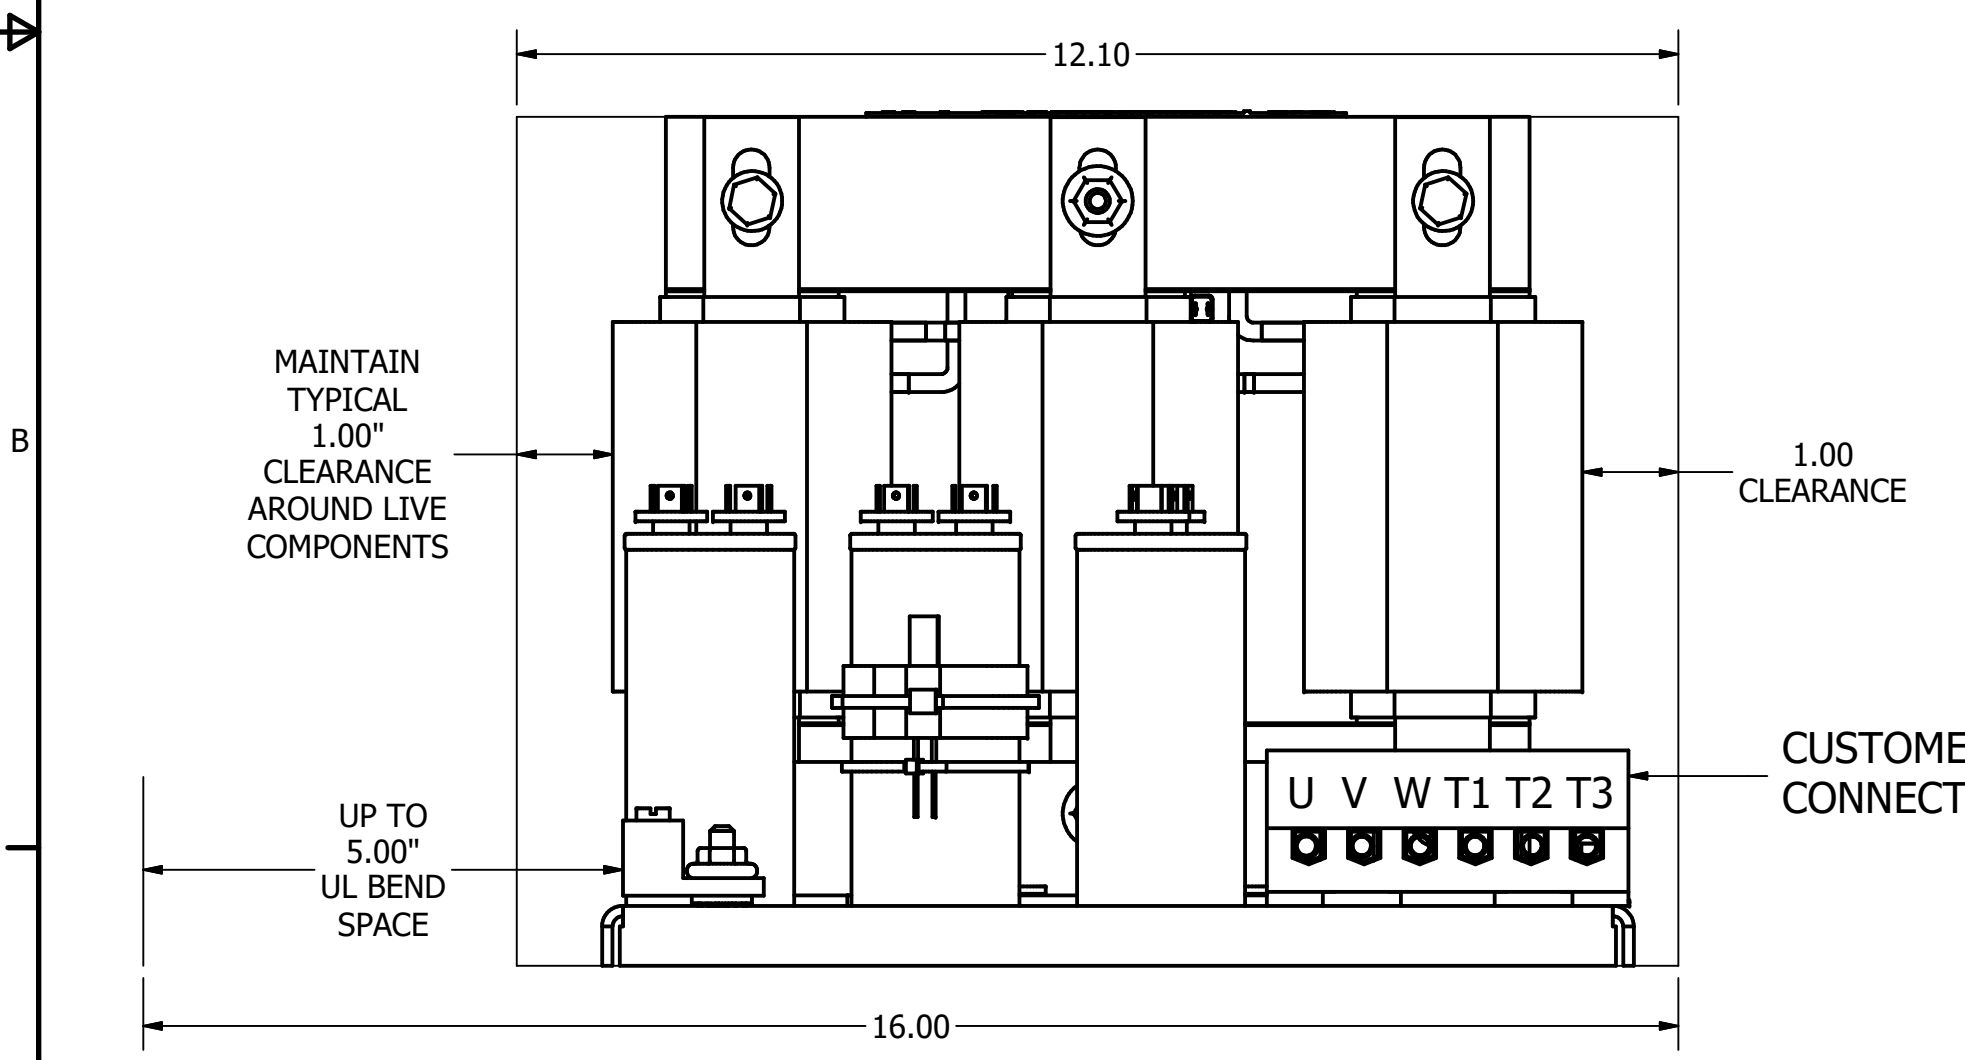
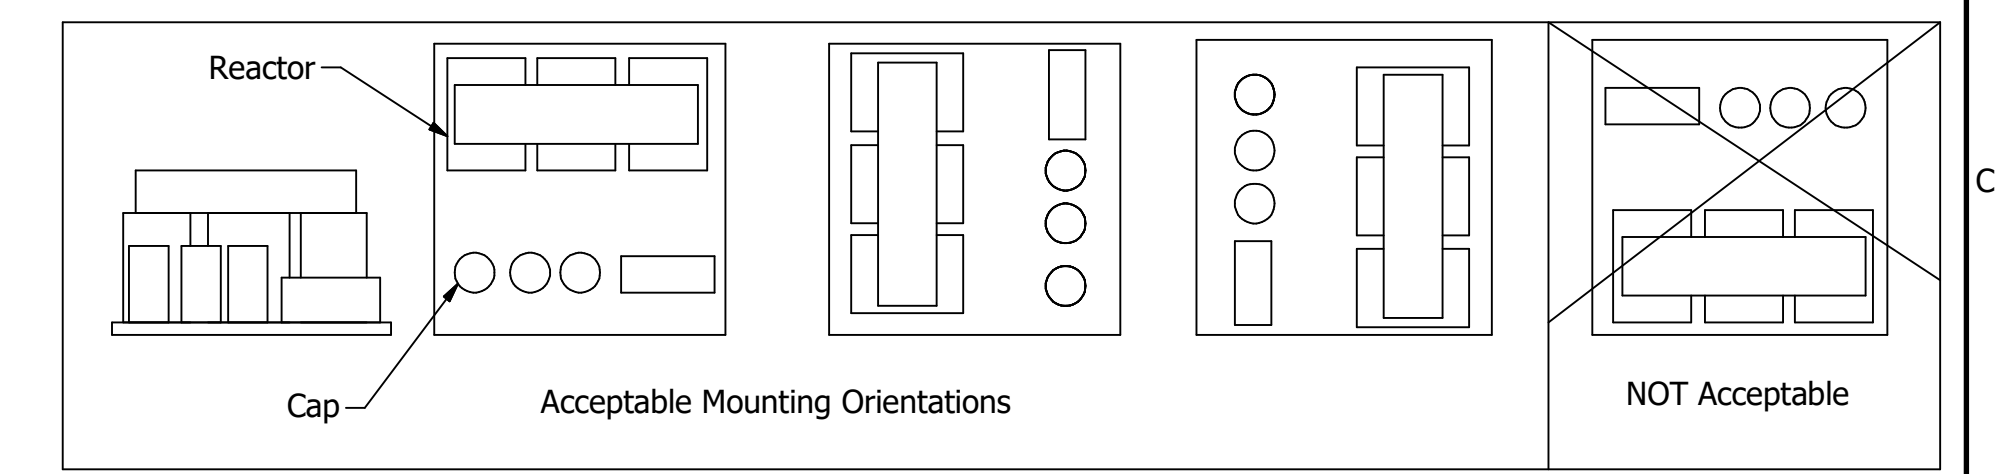
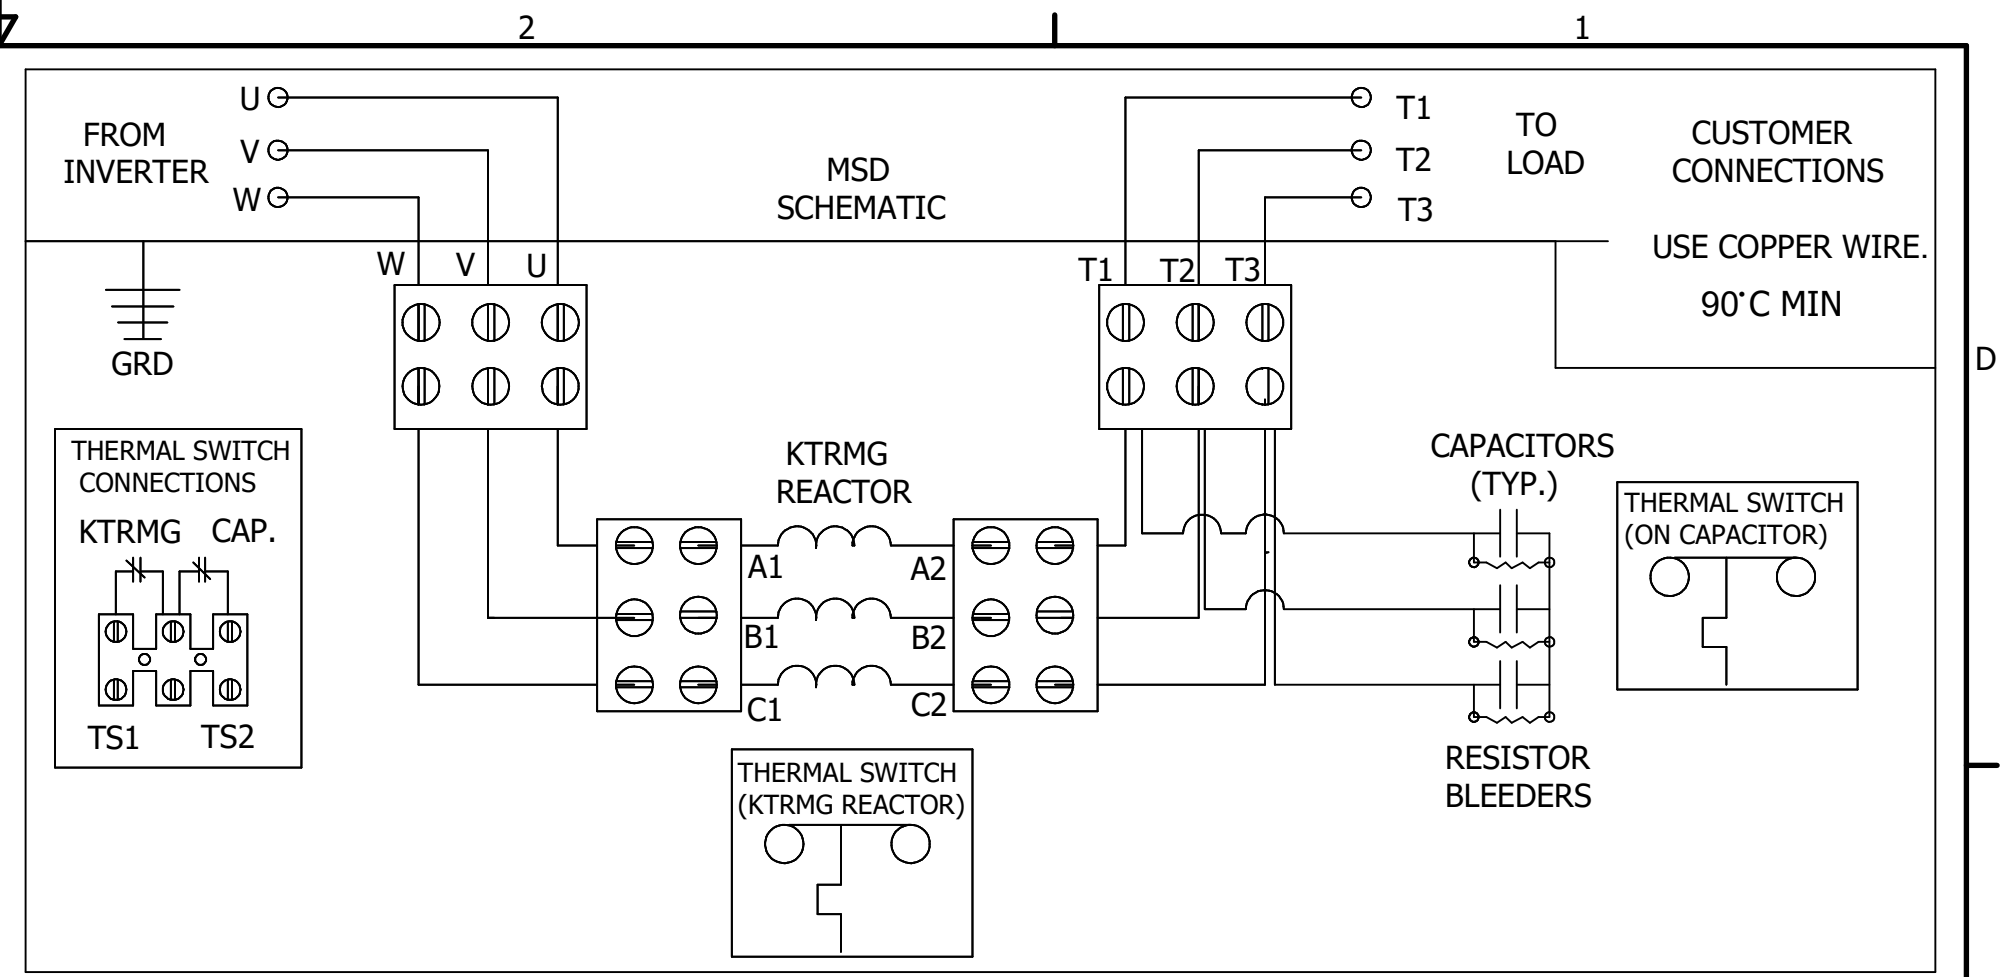


HGP PART NUMBER	HP	VOLT	CURRENT	WEIGHT	TERMINAL BLOCK	GROUND LUG
MSD0045A000	30	480V	45 Amps	65 LBS	WIRE RANGE: 1-22AWG	WIRE RANGE: 1/0-14AWG

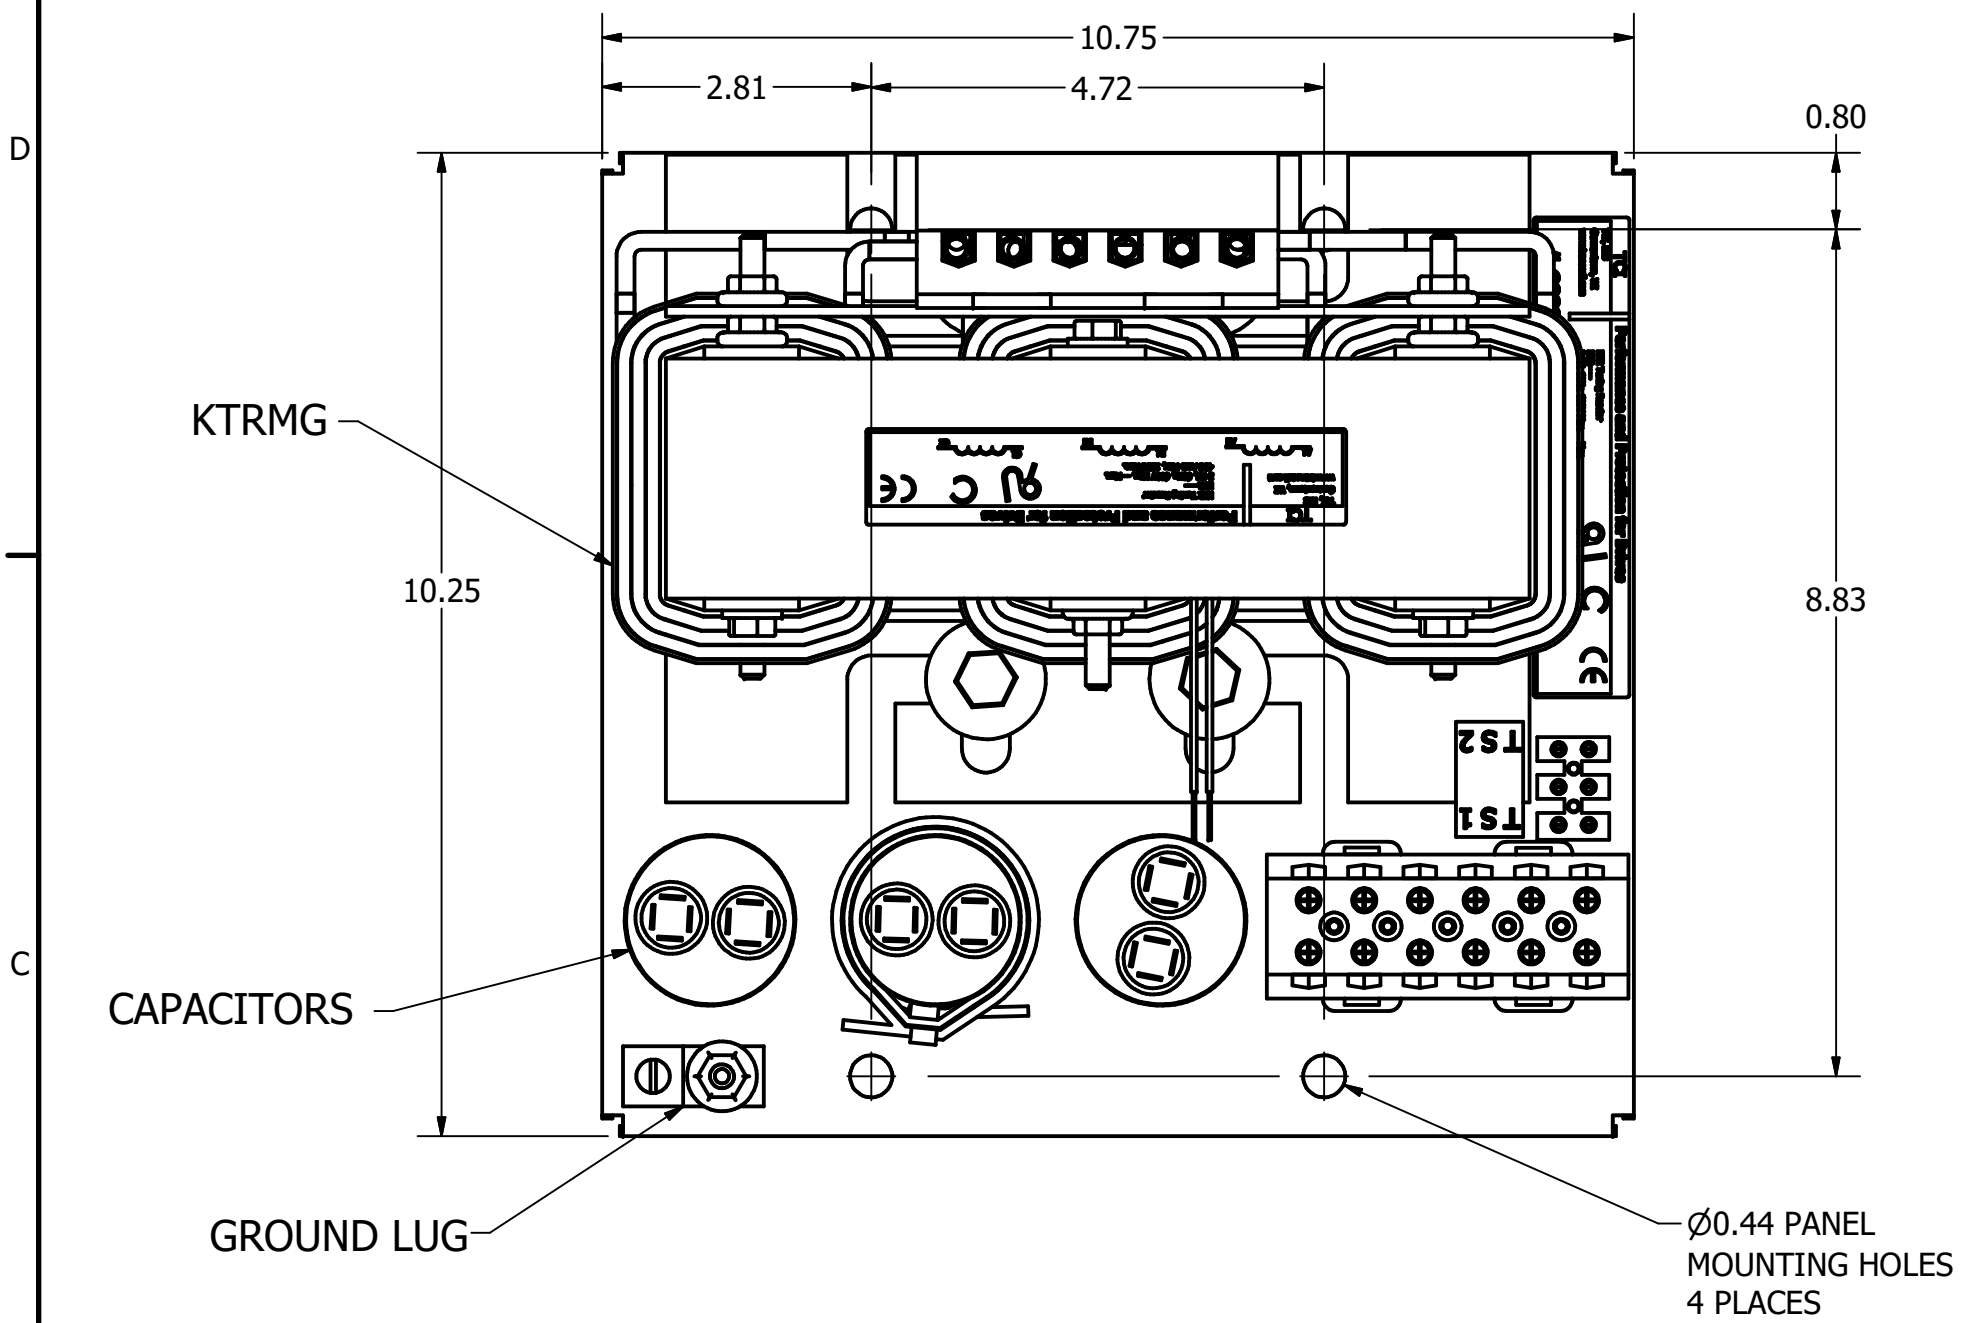

WARNING
 WAIT TWO MINUTES AFTER
 POWER IS TURNED OFF
 BEFORE OPENING TO
 ALLOW FOR CAPACITOR
 DISCHARGE.

CAPACITOR DISCHARGE LABEL
 TO SHIP WITH PANEL

NOTE: FOR WIRE RANGE AND
 TORQUE INFORMATION
 SEE IOM MANUAL.

CUSTOMER IS RESPONSIBLE FOR PROPER
 COOLING OF FILTER COMPONENTS
 CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

			TOLERANCES (EXCEPT AS NOTED)	TQI W132 N10611 Grant Drive Germantown, WI 53022
			DECIMAL .XX ± .03 .XXX ± .010	
			FRACTIONAL ± 1/32	MotorShield Sinewave Filter 45 Amp, 480/3/60, Open
			ANGULAR ± 1°	
NO	REVISION	DATE	BY	DRN BY: JRN DATE: 06/21/18 107765DG SCALE: 1/2 APRVD: SIZE: C SHT. 1 OF 1