
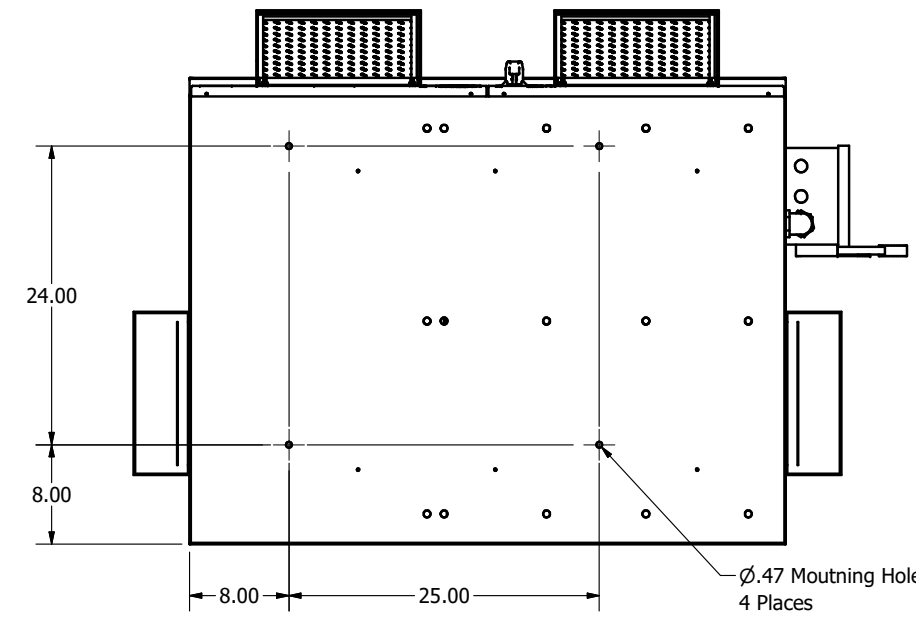
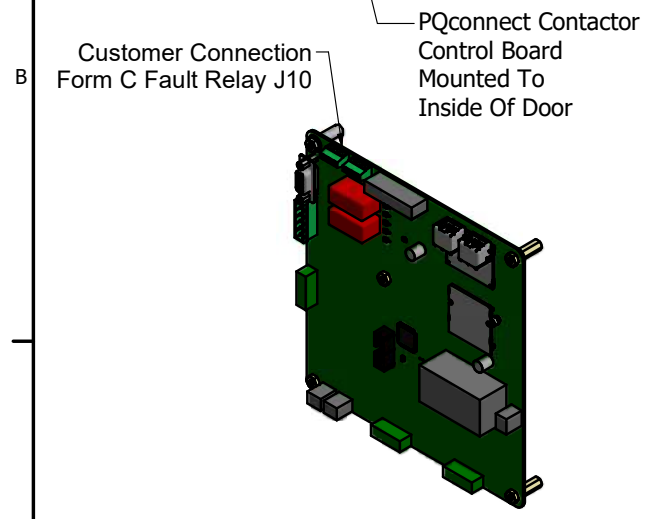
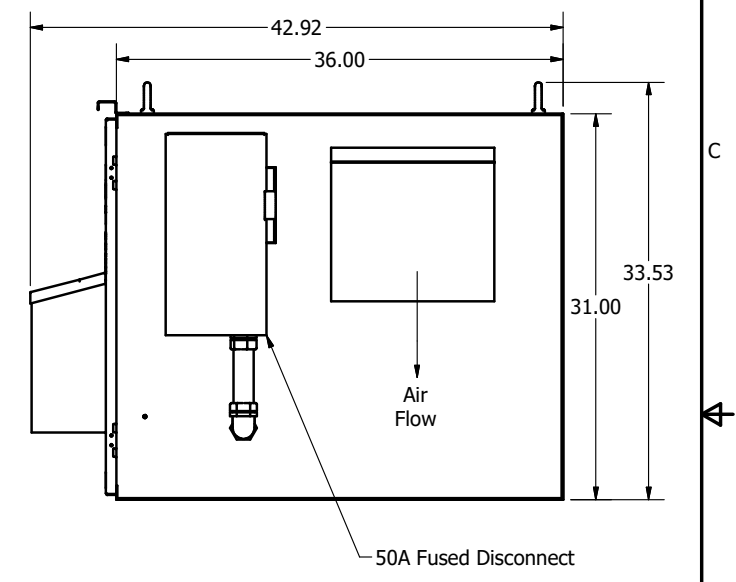
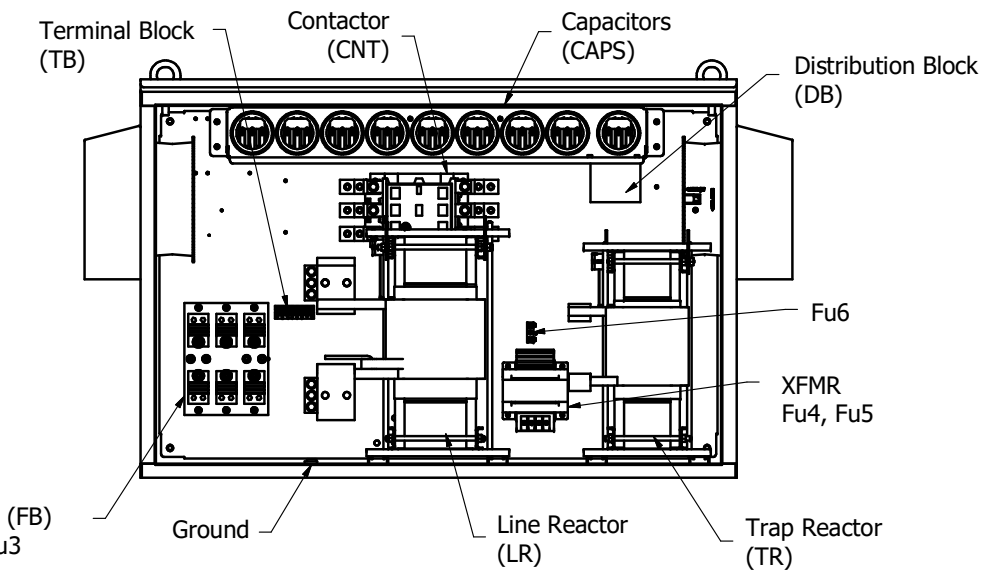


UNIT SPECIFICATIONS							
Part Number	HP	KVAR	HARMONIC	VOLT	Hz	PHASE	Amps
108024-01	600	180	5TH	480	60	3	720

For Schematic, See Drawing# 31462-50

- Notes:
1. Customer is responsible for installation to meet all national and local electrical codes.
 2. Use only hubs or fittings that comply with UL514B for type 3R enclosures.
 3. Approx. WT LBS : 1200
 4. Enclosure Color: RAL 7006 Beige Grey

Customer Connections:
L1, L2, L3, T1, T2, T3, and
Ground Lug.
Wire Range- Three, 350MCM-6AWG
Tightening Torque - 275 lb-in

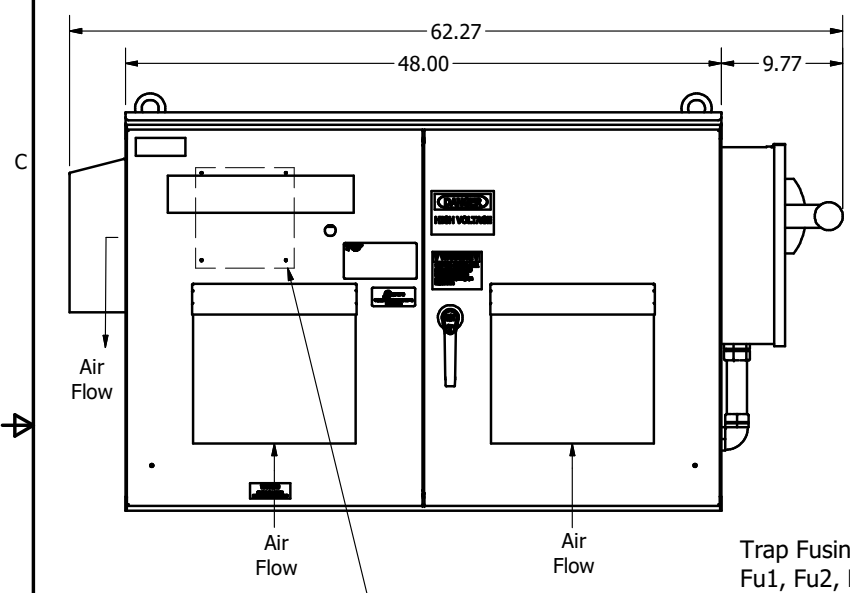

Thermal Switches Installed In Line Reactor And Tuning Reactor Wired To PQconnect For Monitoring

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		Material(s) Shall be RoHS Compliant	
W132 N10611 Grant Drive Germantown, WI 53022				HarmonicGuard Passive 600HP, 480/3/60, Type 3R, JCI, PQconnect, 50A Fused Disconnect, 371-09214-301		108024-01DG	
A As Designed		08/26/20		JRN		DATE: 08/26/20	
NO REVISION		DATE		BY		SCALE: 1/10	

A

B

C

D

A

B

C

D

4

3

2

1