

4

3


2

1

TCI Part Number	Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)
KTRMG20C	20	600	60	2990	35
KTRMG25C	25	600	60	2390	35

D

D

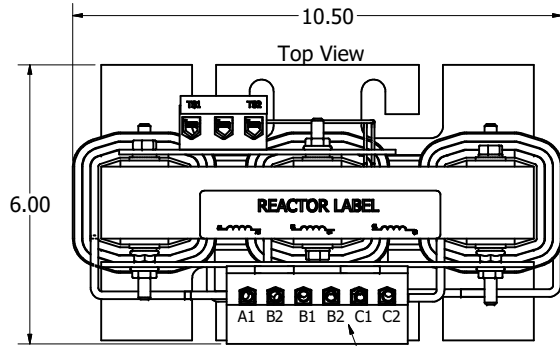


(Customer Connections)
Markings On Terminal Block/ Coil
For Reference Only.

- Wire Range: 1- 4 AWG. Torque : 35 LBS-IN (3.95 Nm)
- 6- 14 AWG. Torque : 30 LBS-IN (3.39 Nm)
- 16- 20 AWG. Torque : 25 LBS-IN (2.28 Nm)
- 22 AWG. Torque : 20 LBS-IN (2.26 Nm)

C

C



Front View

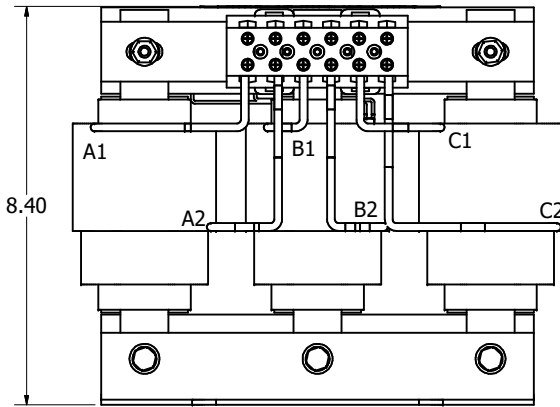

B

B


Side View

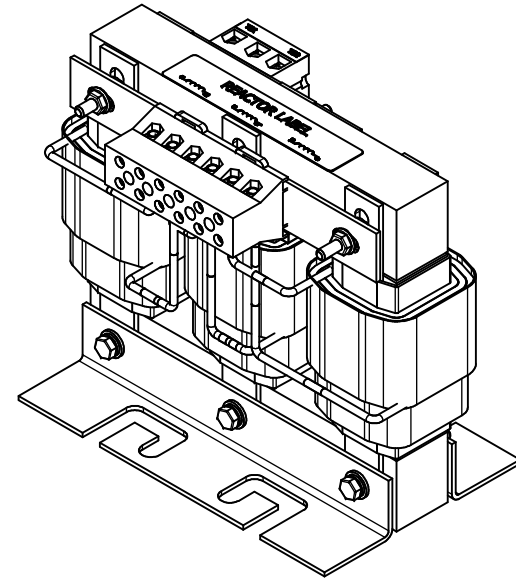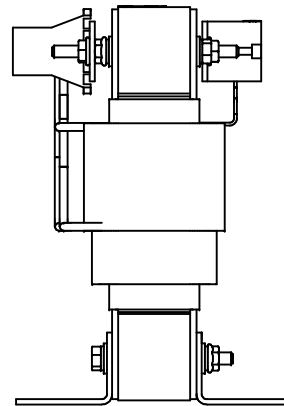

A

A


Bottom View

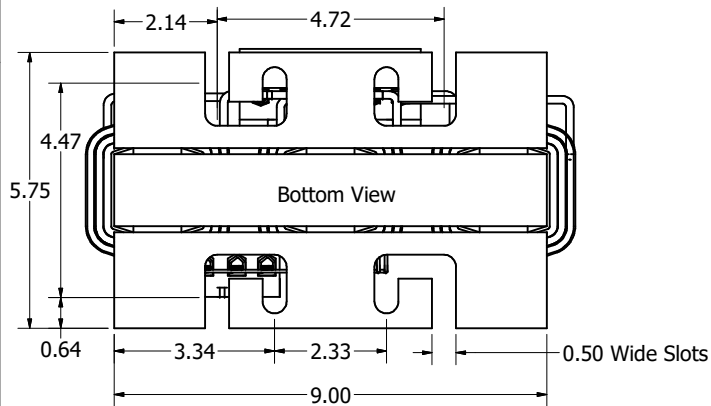

A

A

Thermal Switch Terminal Block



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)

Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

Material(s) Shall be RoHS Compliant
Dimensions are in inches unless otherwise specified.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
1			
2			

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI W132N10611 (Rev 13) 5/25
Germantown, WI 53022
© 2024 TCI, LLC
An Official Motors Company
KTRMG H Frame, Terminal Block
Reactor Drawing
DWG BY: DSW DATE: 11/18/2024 108080-1DG
SCALE: 1/2 DRAWN BY: [Signature] SHEET 1 OF 1