
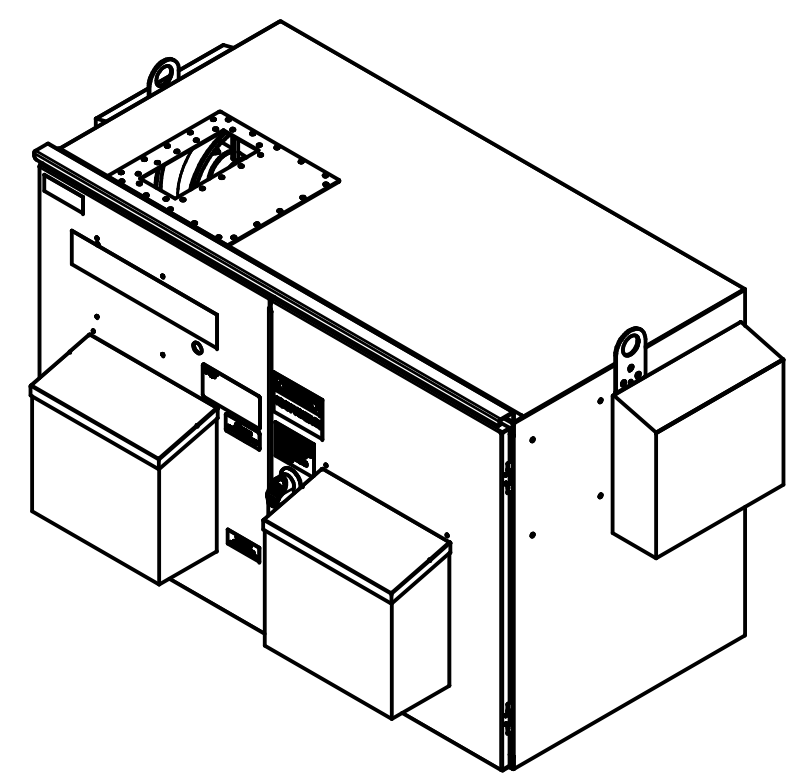


UNIT SPECIFICATIONS						
kW	VOLT	PHASE	HZ	HARMONIC	KVAR	AMPS
160	380-415	3	50	5TH	32.2	320


SCHEMATIC : 31653 Top View

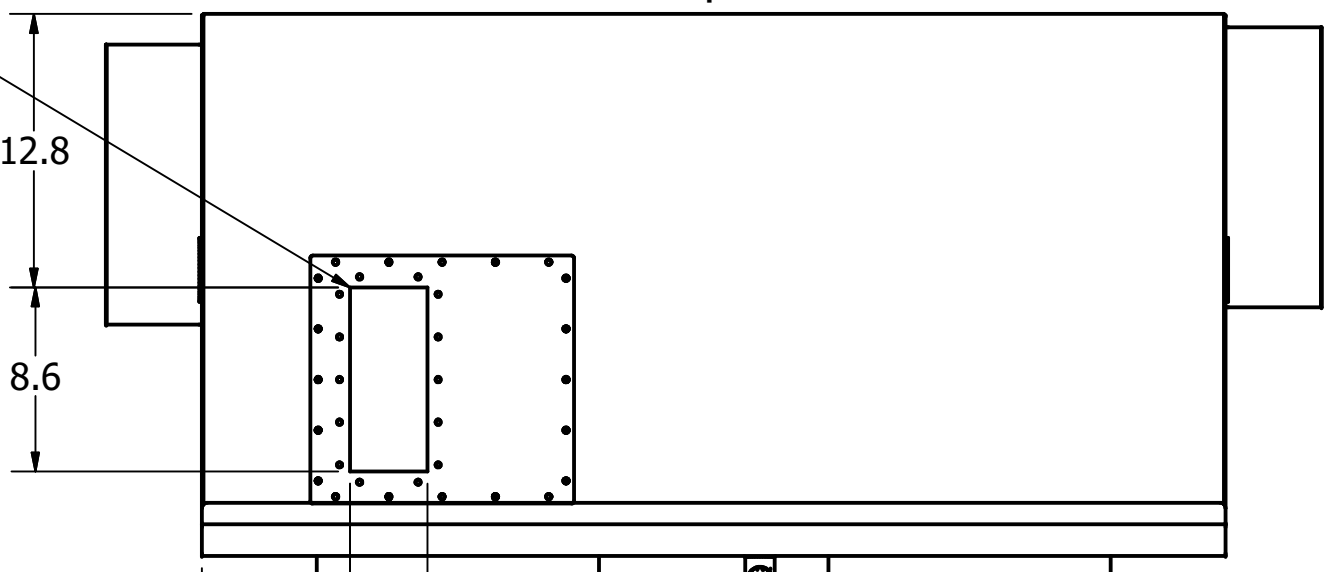


GROUND LUG:
WIRE RANGE - TWO 350MCM-4
TIGHTENING TORQUE 375 IN-LB.

CUSTOMER CONNECTIONS:
WIRE RANGE - TWO 350MCM-4
TIGHTENING TORQUE 375 IN-LB.


- Notes:**
1. Customer is responsible for installation to meet all national and local electrical codes.
 2. Use only hubs or fittings that comply with UL514B for type 3R enclosures.
 3. Approx. WT LBS : 650
 4. Enclosure Color: RAL 7006 Beige Grey.
 5. PQconnect Programming Model: Custom Unit HGL0160LxxC1xxx

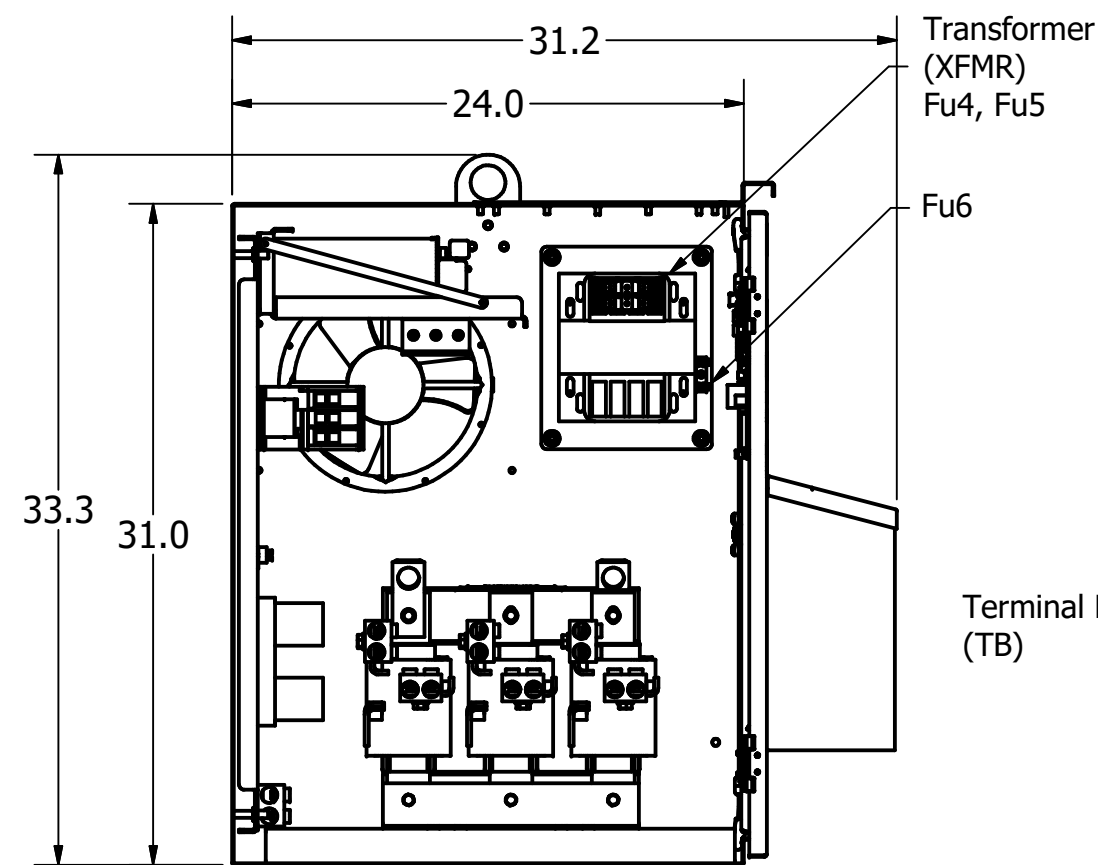


Side View Without Wall

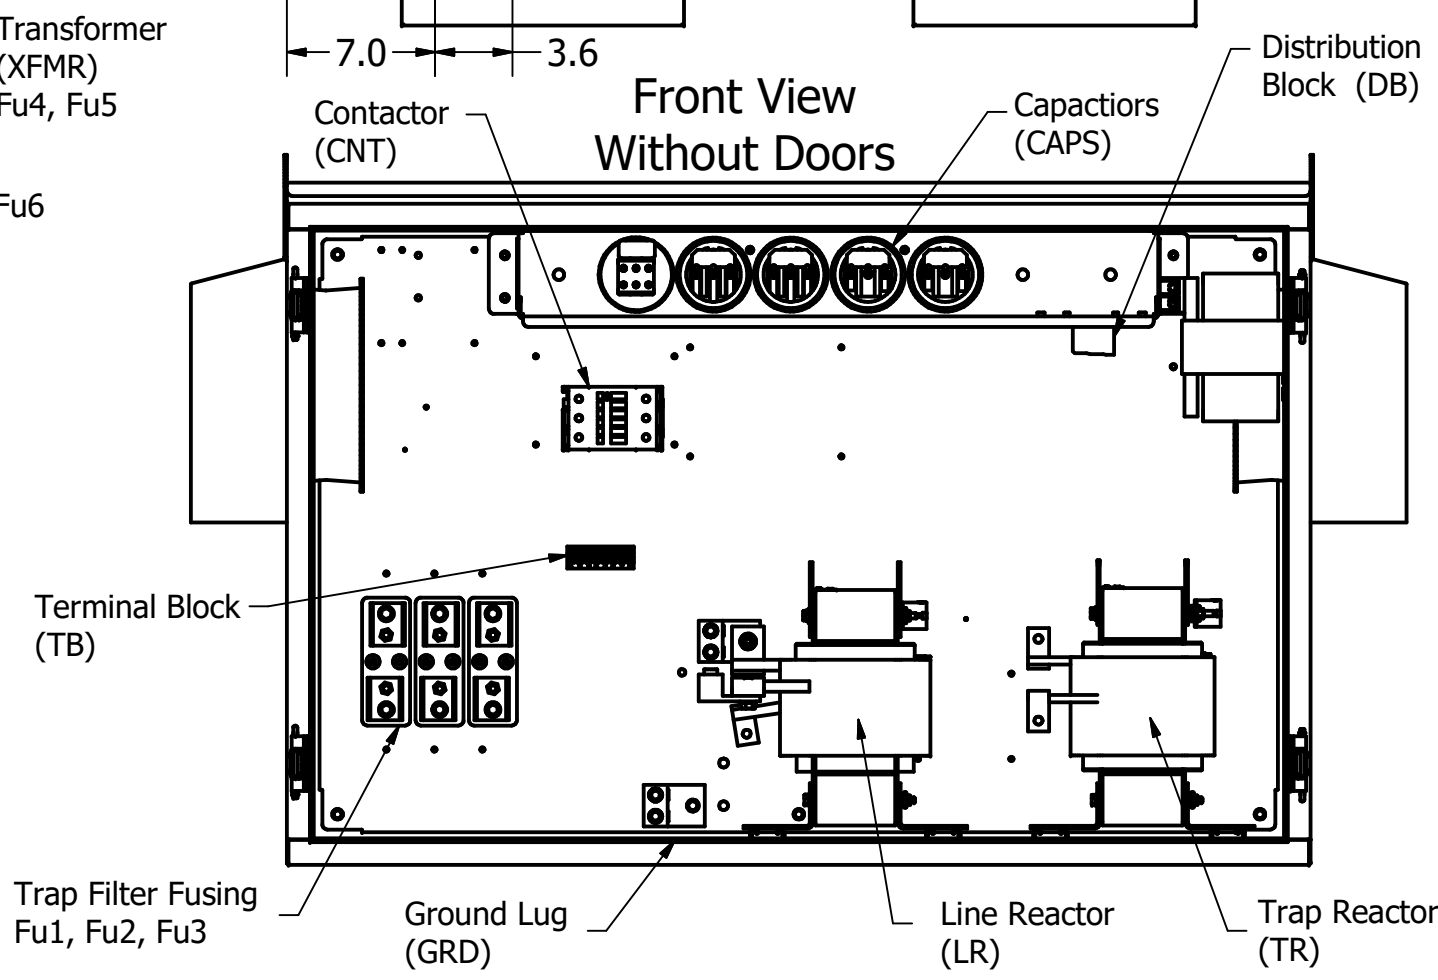

Front View Without Doors

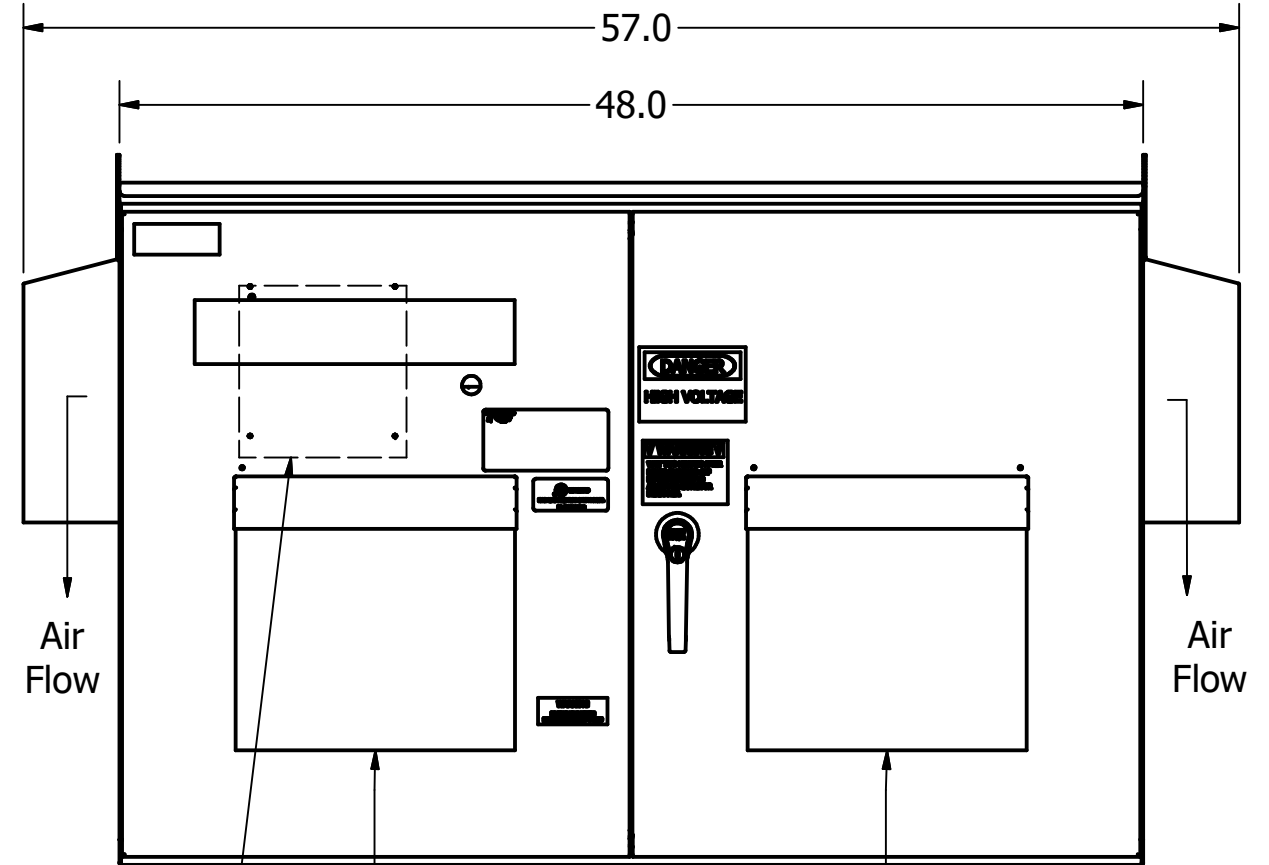


Front View

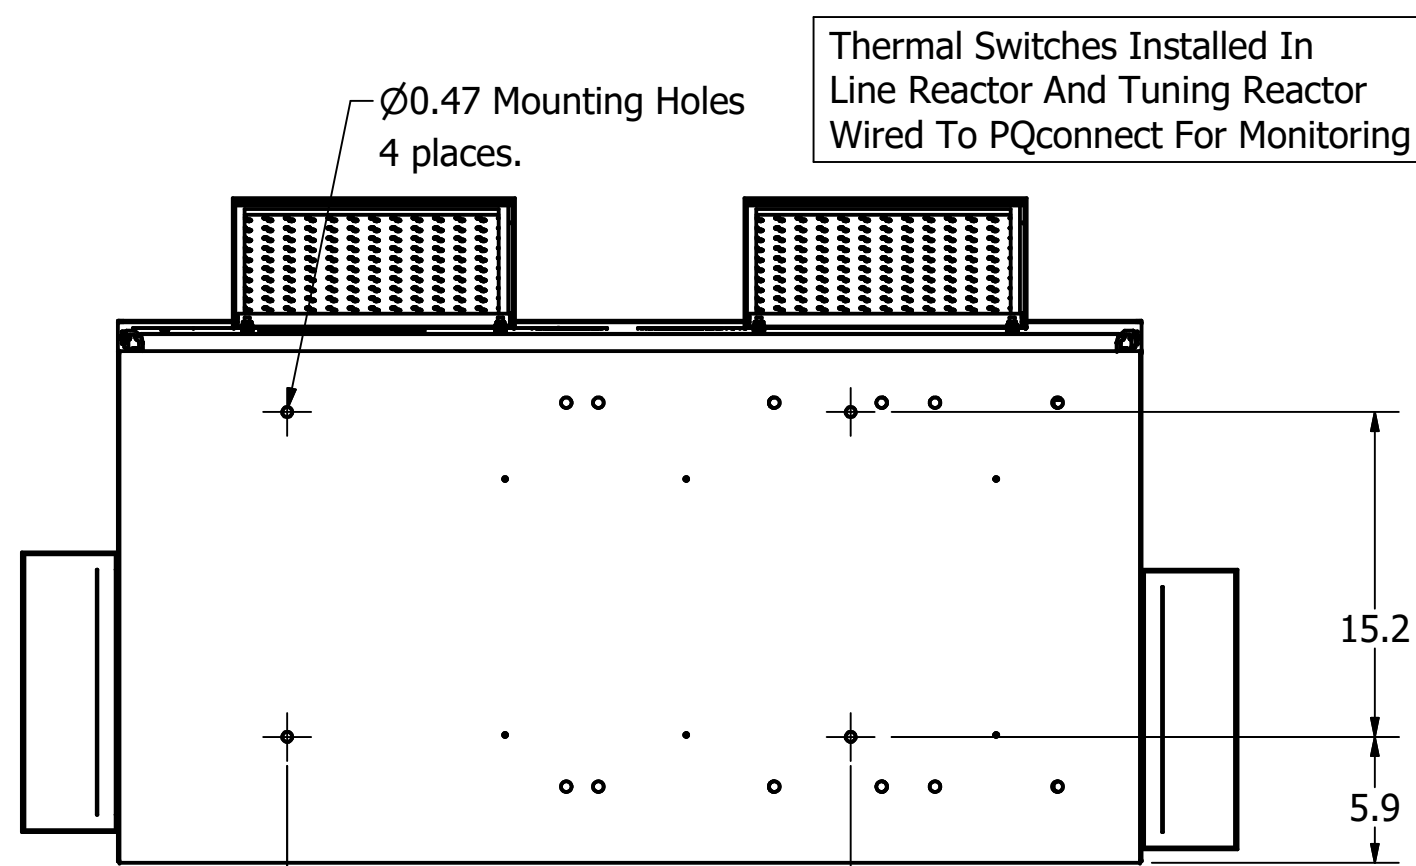

Bottom View

PQconnect Contactor Control Board Mounted To Inside Of Door

Customer Connection Form C Fault Relay J10

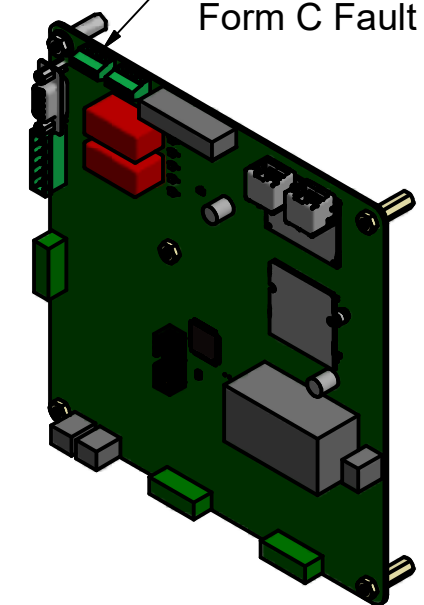

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		W132 N10611 Grant Drive Germantown, WI 53022 HarmonicGuard Low Capacitance 160kW, 380-415/3/50, Type 3R, JCI, PQconnect, 371-09214-301 DRN BY JRN DATE 01/15/20 108201DG SCALE 1/9 APRVD: SIZE C SHT.1 OF 1	
B	5363 Door Hoods Deeper, No Back Holes	08/20/20	JRN				
A	As Designed	01/15/20	JRN				
NO	REVISION	DATE	BY				