

GROUND LUG:
WIRE RANGE - TWO 350MCM-6
TIGHTENING TORQUE 375 LB-IN.



L1 L2 L3 T1 T2 T3
CUSTOMER CONNECTIONS:
WIRE RANGE - TWO 350MCM-6
TIGHTENING TORQUE 375 LB-IN.

- Notes:
1. Customer is responsible for installation to meet all national and local electrical codes.
 2. Use only hubs or fittings that comply with UL514B for type 3R enclosures.
 3. Approx. WT LBS : 850
 4. Enclosure Color: RAL 7006 Beige Grey
 5. JCI P/N: TBD



UNIT SPECIFICATIONS						
kW	VOLT	PHASE	HZ	HARMONIC	KVAR	AMPS
200	380-415	3	50	5TH	40	430

SCHEMATIC : 31462-LXL


Top View

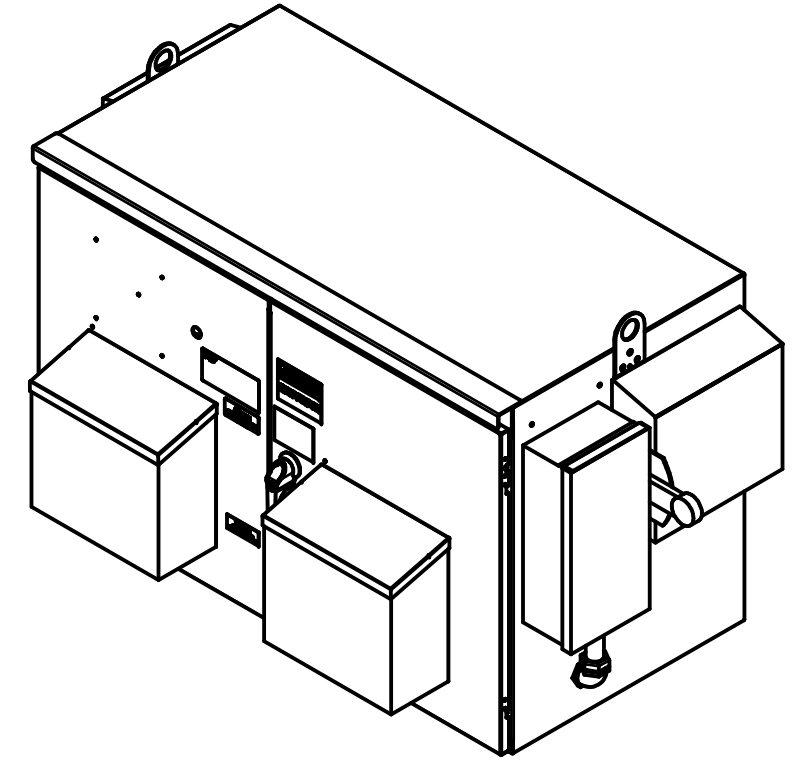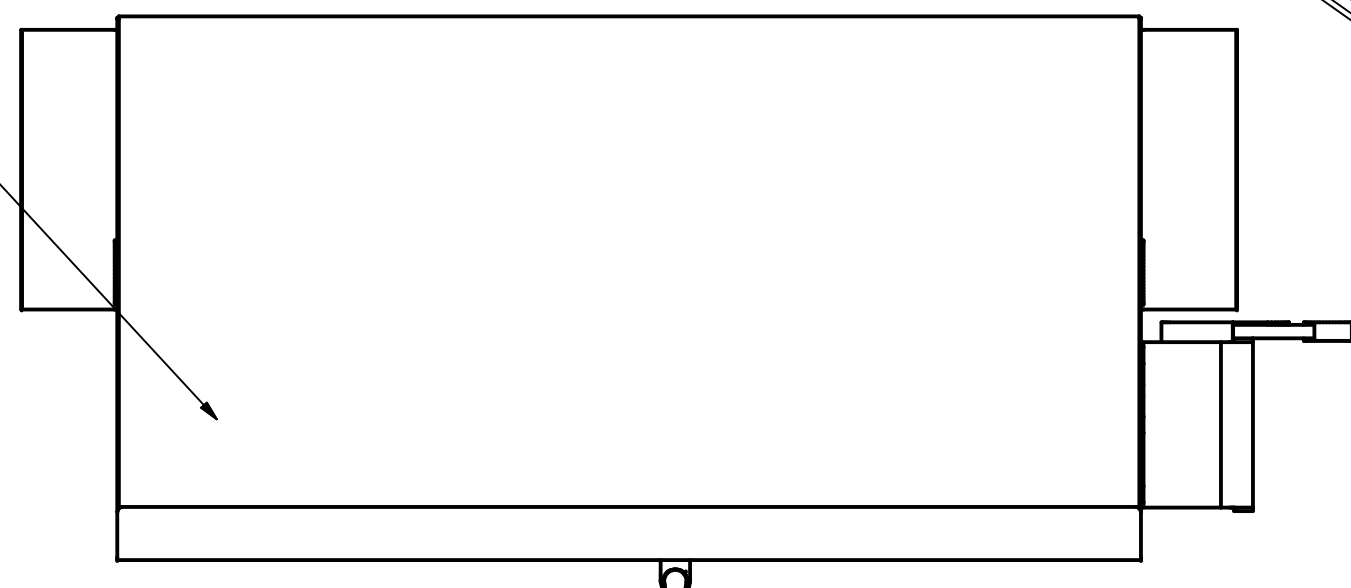

Front View Without Doors

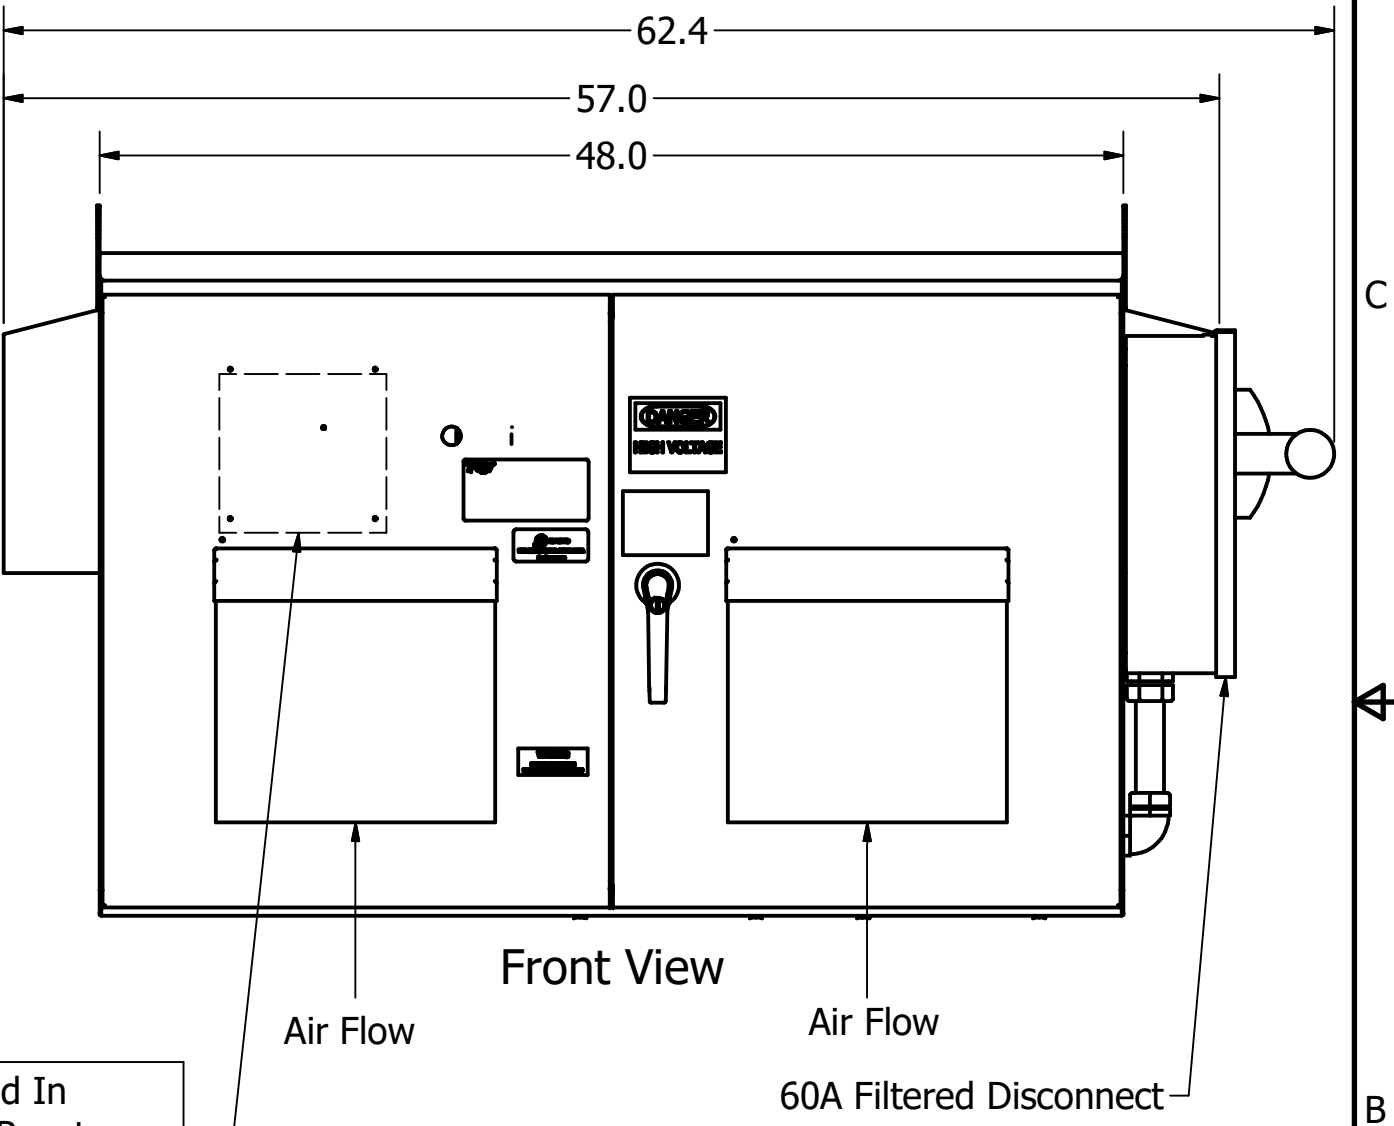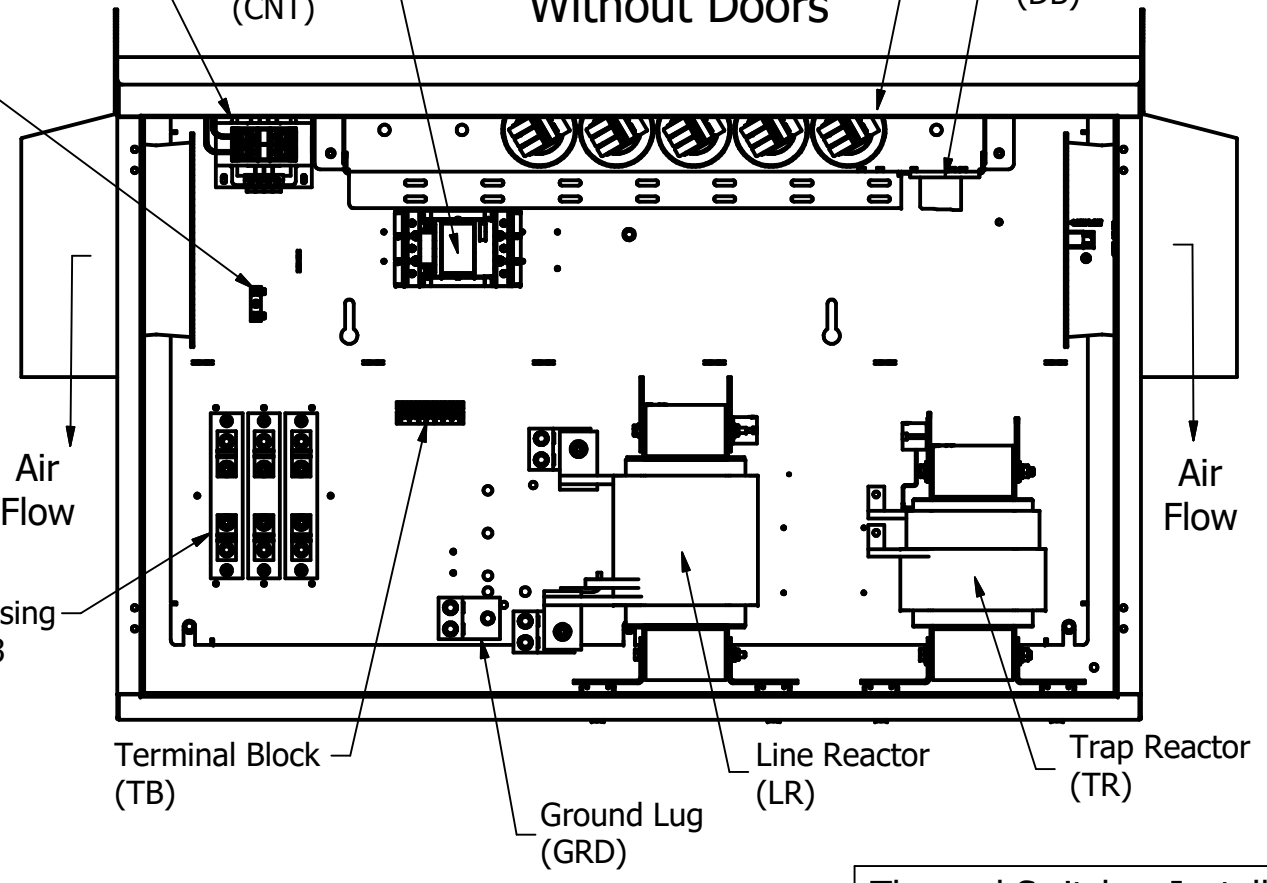


Side View Without Wall

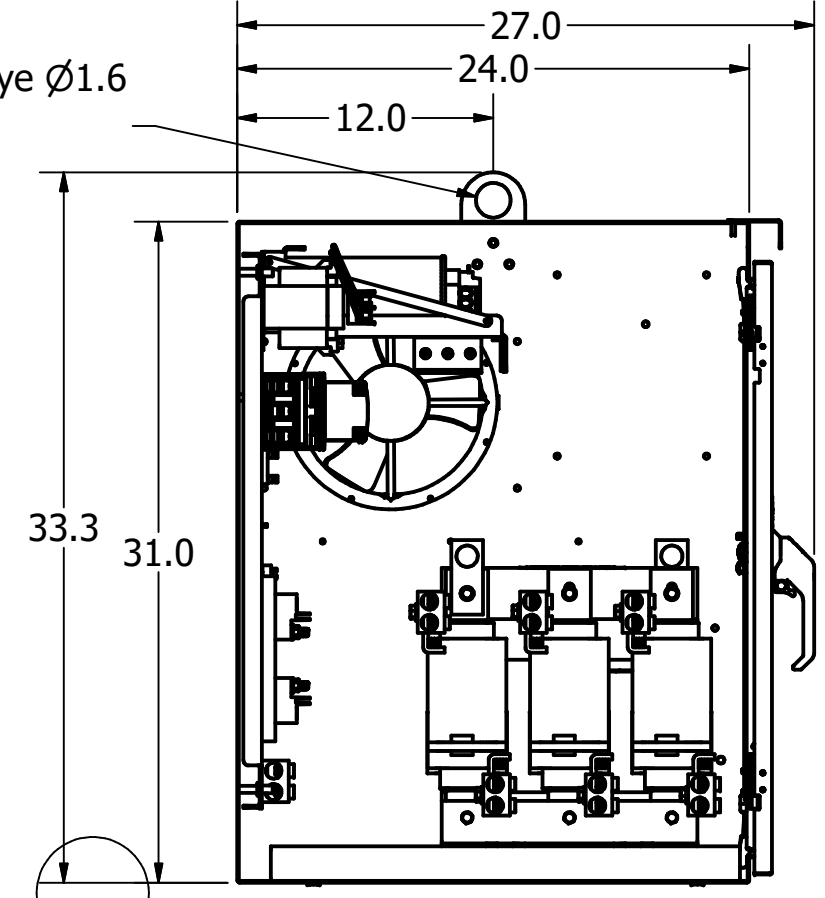



PRELIMINARY

Thermal Switches Installed In Line Reactor And Tuning Reactor Wired To PQconnect For Monitoring

PQconnect Contactor Control Board Mounted To Inside Of Door

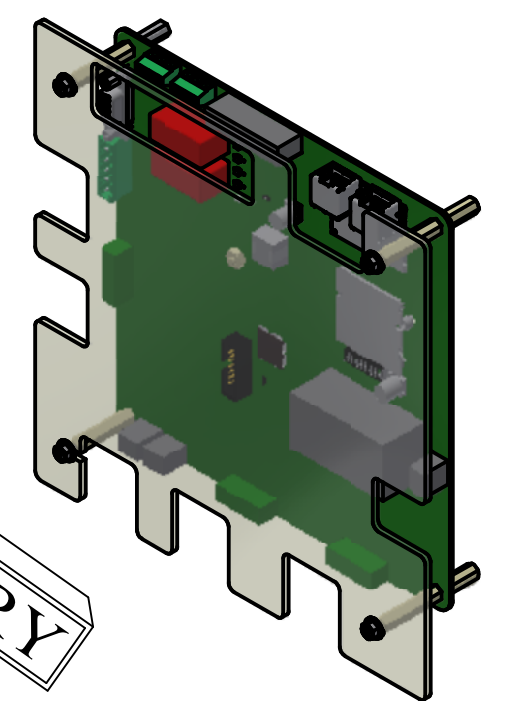

PRELIMINARY

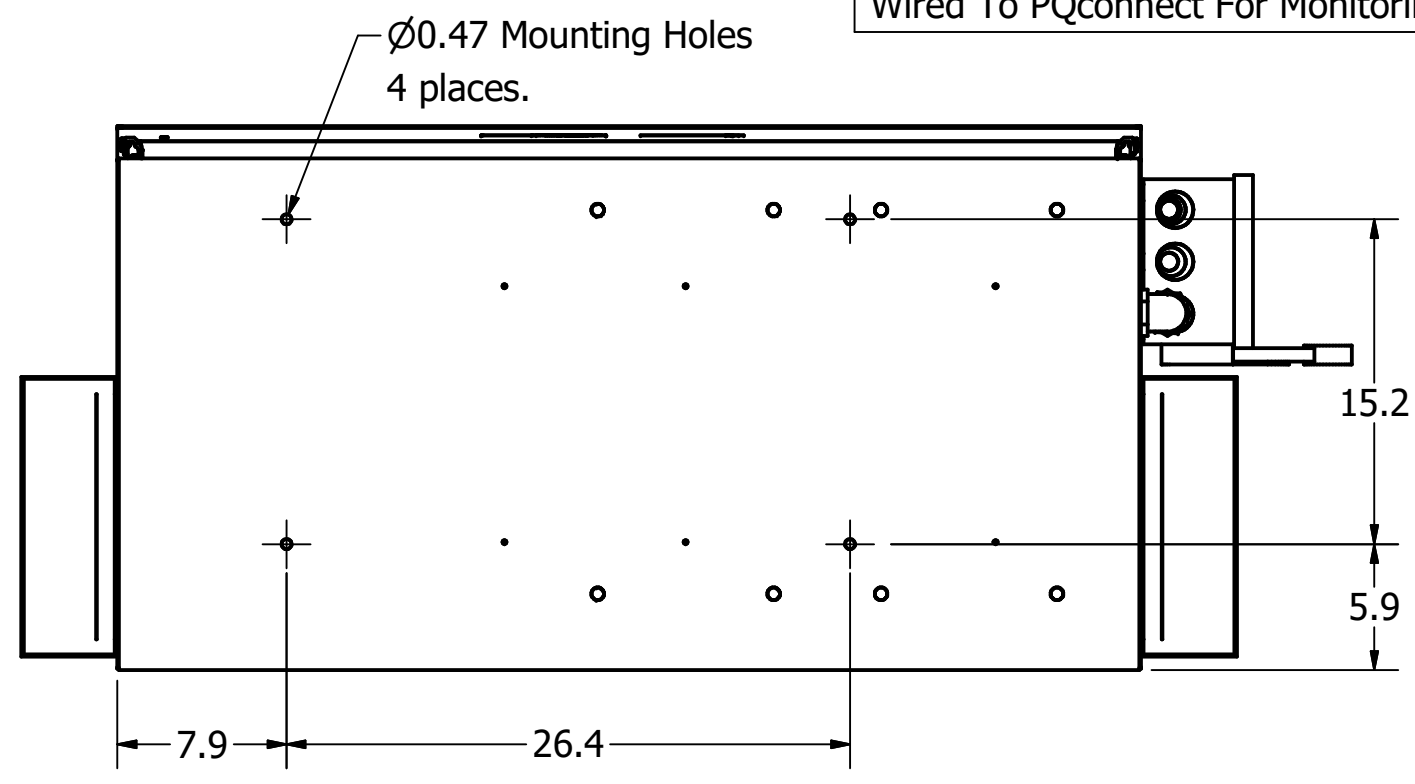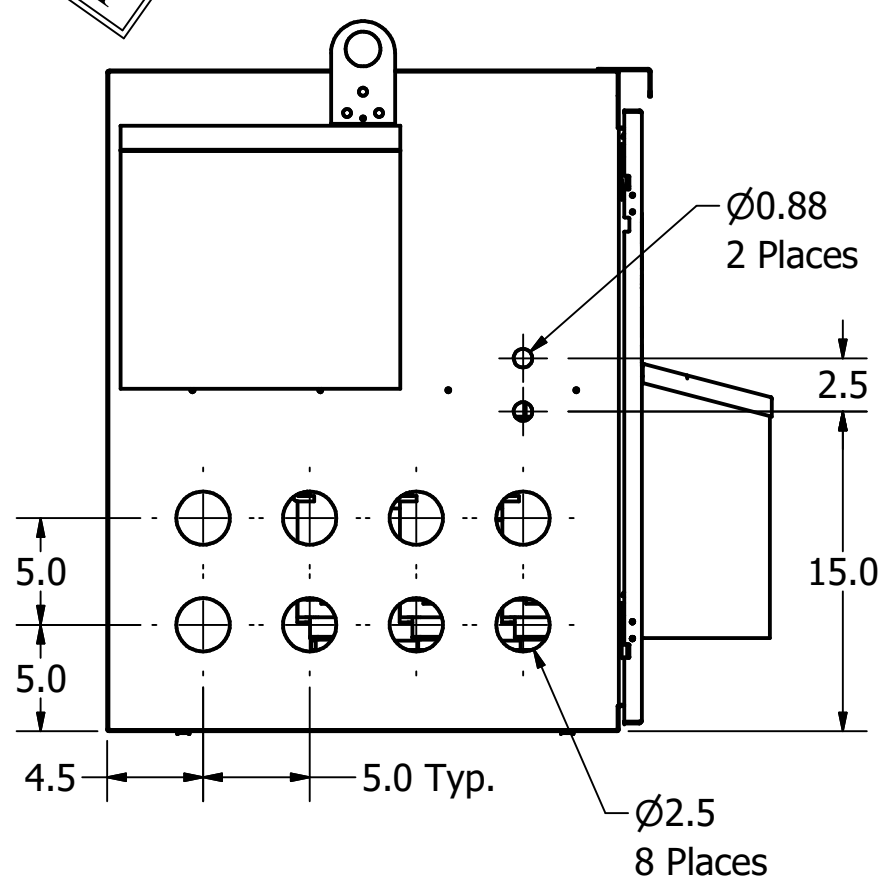

Bottom View

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.	DRN. NO.	01	ECO	REVISION	DATE	04/17/26	BY	JRN	SCALE	1/12	DRN. NO.	108202-01DG	SIZE	C	SHT.1 OF 1
		DRN. BY	JRN	DATE	04/17/26	Allient Power		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.		HarmonicGuard Low Capacitance, 200kW 380-415/3/50, 3R, JCI, 60A Unfiltered Disc						