
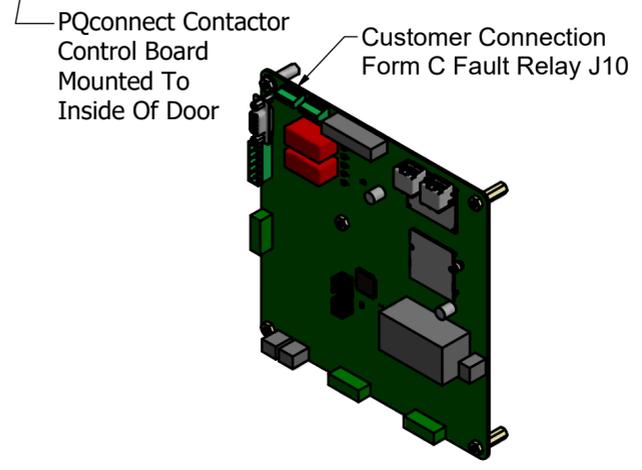
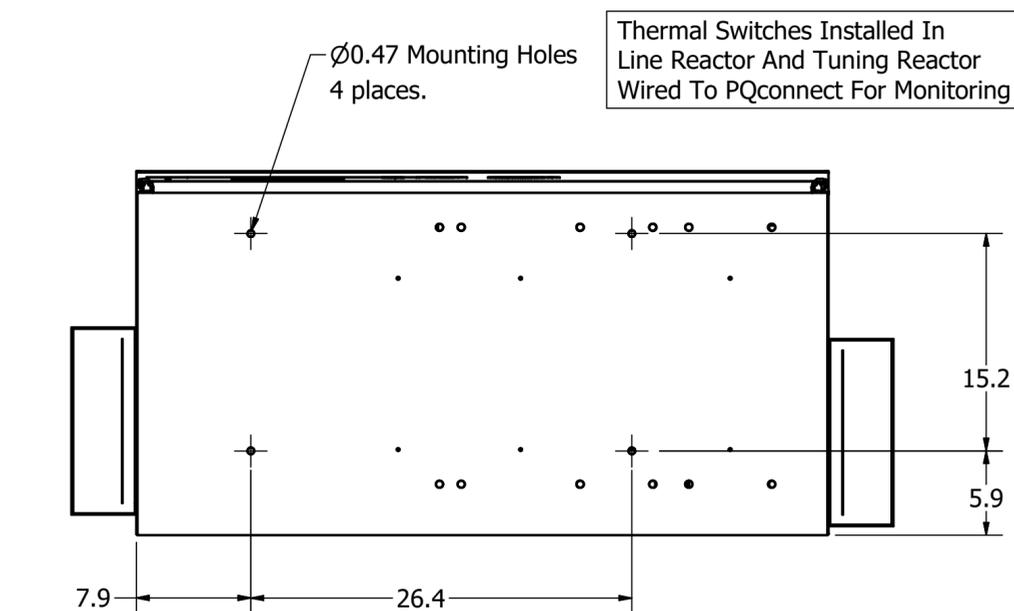
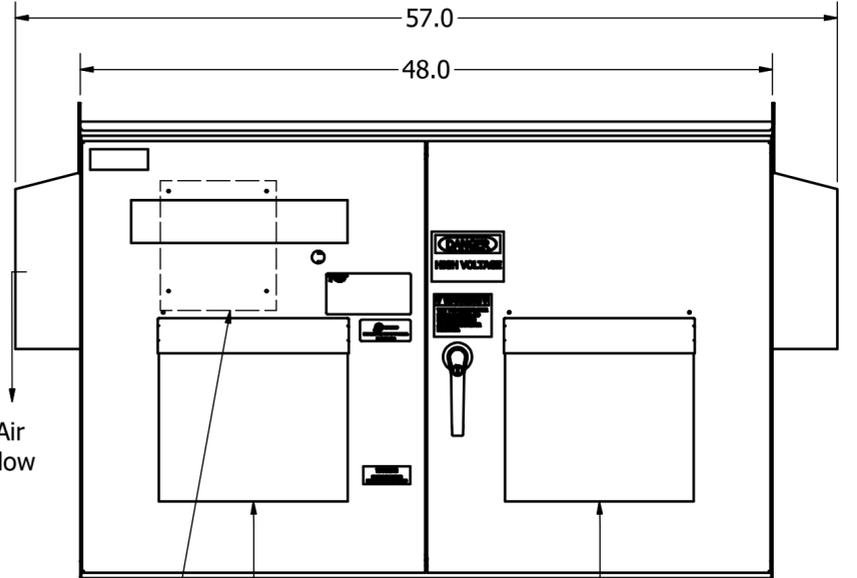
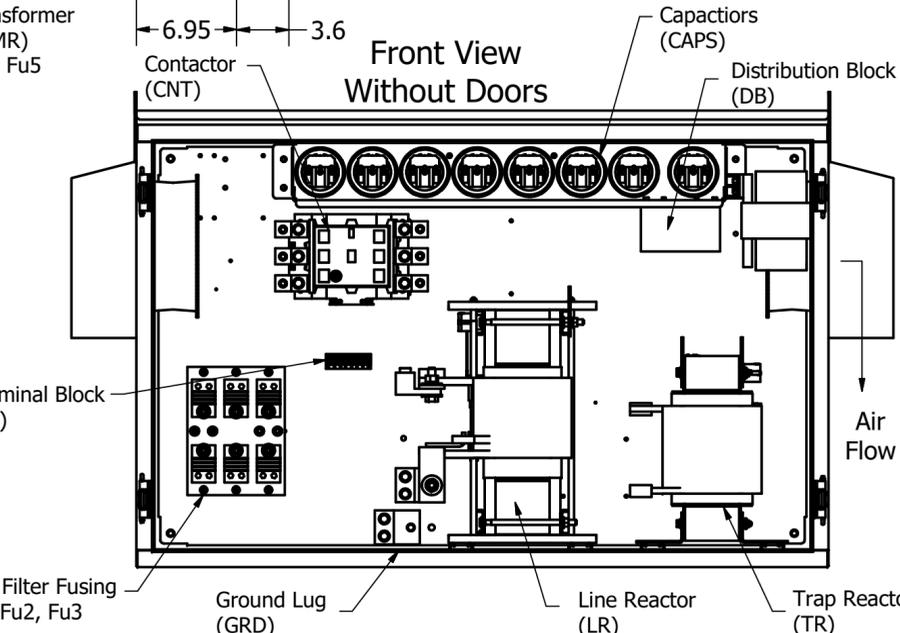
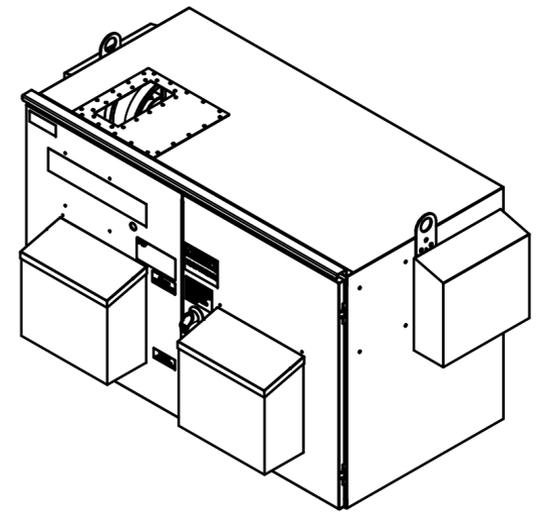


UNIT SPECIFICATIONS						
KW	VOLT	PHASE	HZ	HARMONIC	KVAR	AMPS
315	380-415	3	50	5TH	61	625

SCHMATIC : 31653  
Top View

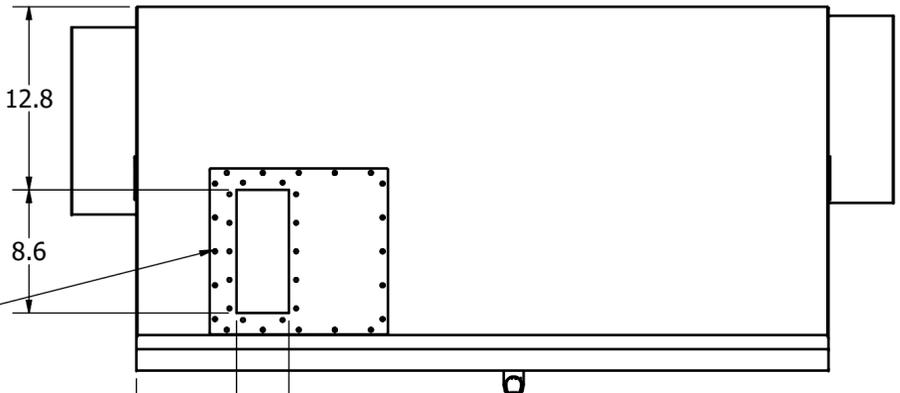


GROUND LUG:  
WIRE RANGE - TWO 600MCM-2  
TIGHTENING TORQUE 500 IN-LB.

L1 L2 L3 T1 T2 T3

CUSTOMER CONNECTIONS:  
WIRE RANGE - TWO 600MCM-2  
TIGHTENING TORQUE 500 IN-LB.

- Notes:
1. Customer is responsible for installation to meet all national and local electrical codes.
  2. Use only hubs or fittings that comply with UL514B for type 3R enclosures.
  3. Approx. WT LBS : 950
  4. Enclosure Color: RAL 7006 Beige Grey.
  5. Filter Configured With Dry Capacitors.
  6. JCI P/N: 371-09214-304

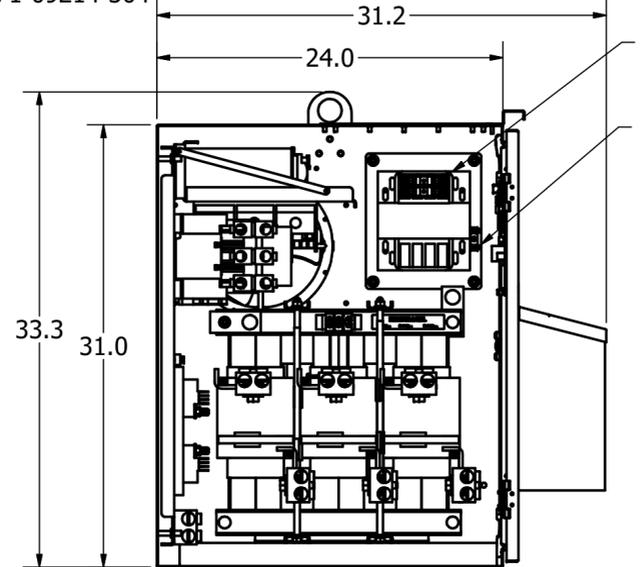

Side View Without Wall

Bottom View

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
A	As Designed	05/04/21	JRN

TOLERANCES (EXCEPT AS NOTED)  
DECIMAL  
.XX ± .25  
.XXX ± .10  
FRACTIONAL  
± 1/32  
ANGULAR  
± 1°

**TCL**  
An Allied Motion Company

W132N10611 Grant Drive  
Germantown, WI 53022  
© 2021 TCL, LLC

HarmonicGuard Low Capacitance  
315kW, 380-415/3/50, Type 3R, JCI, PQconnect

DRN BY: JRN DATE: 05/04/21  
SCALE: 1/9 APRVD: 108204DG  
SIZE: C SHT. 1 OF 1