
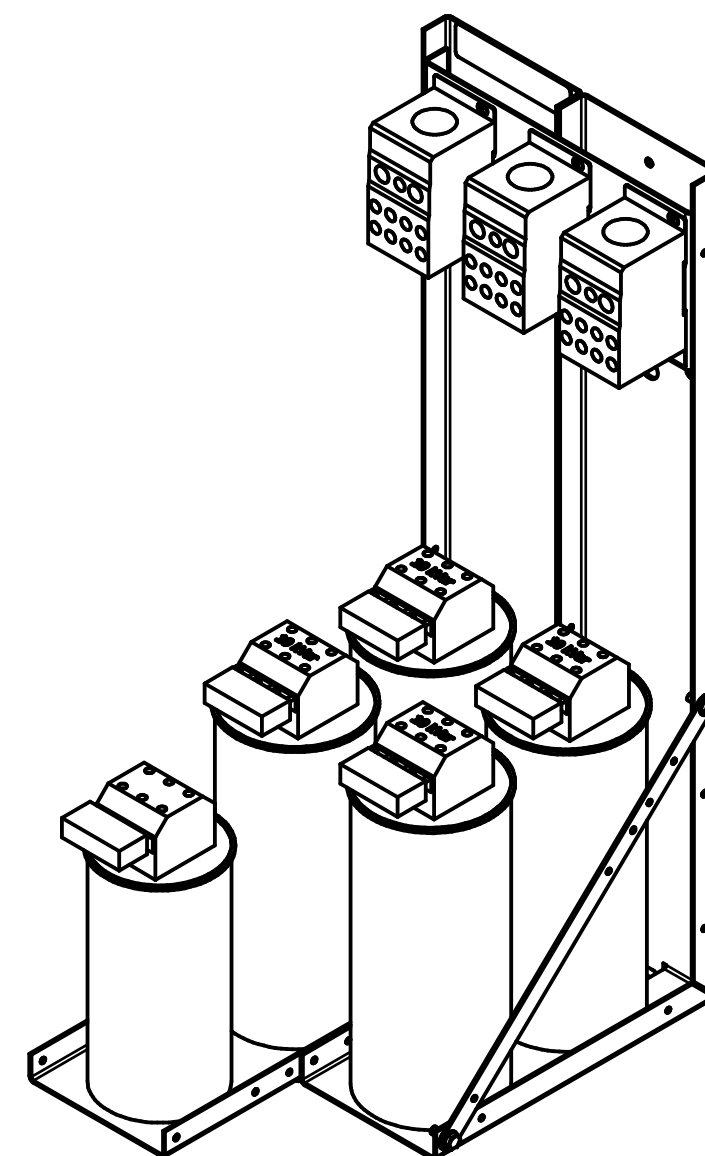


KPCUL043A64, 480V, 164A, 43kVar
 Approx. Weight: 28 Lbs

Customer Input	
Wire Range	Tightening Torque
3/0-350mcm	170 Lb-In

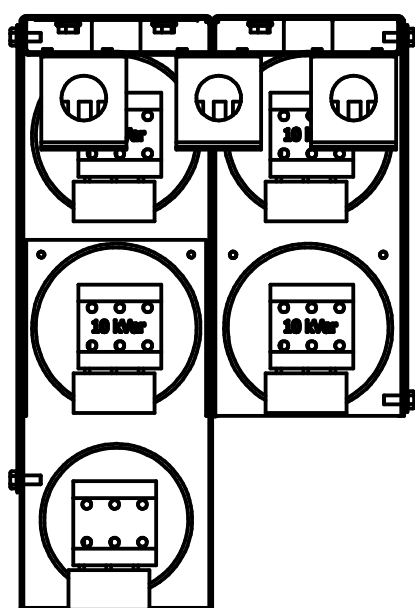

D

C

B





A

D

C

B

A

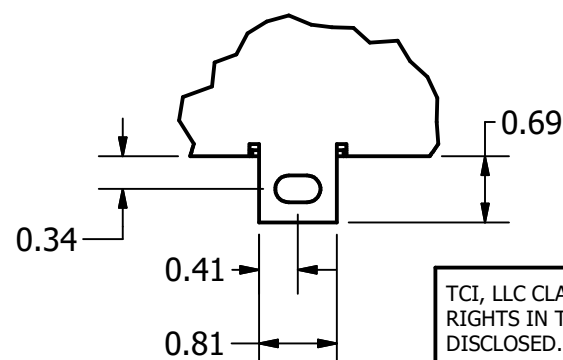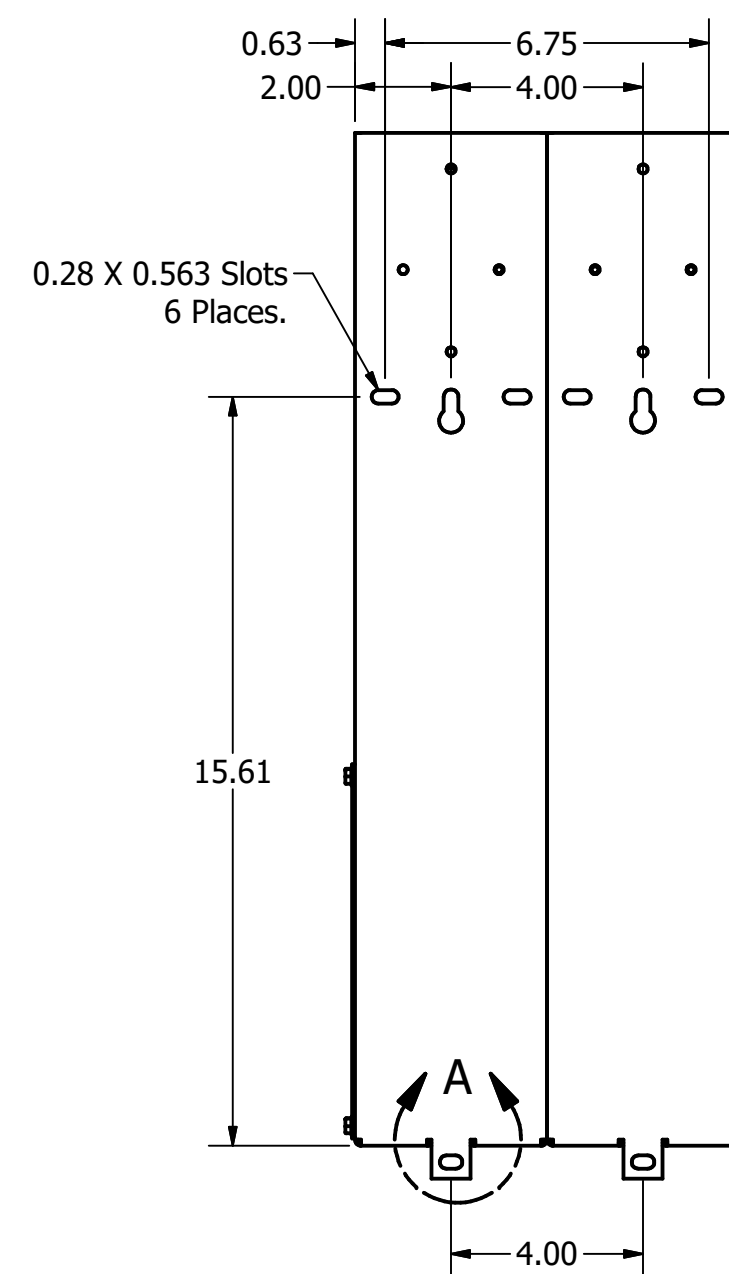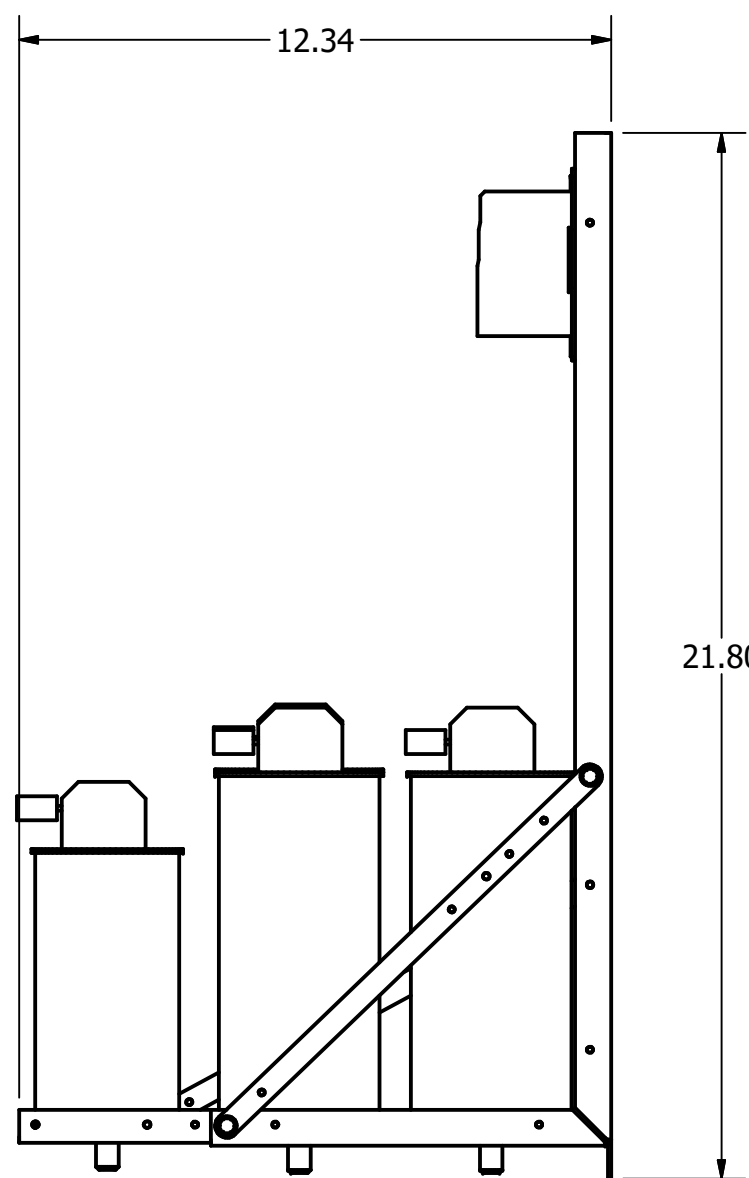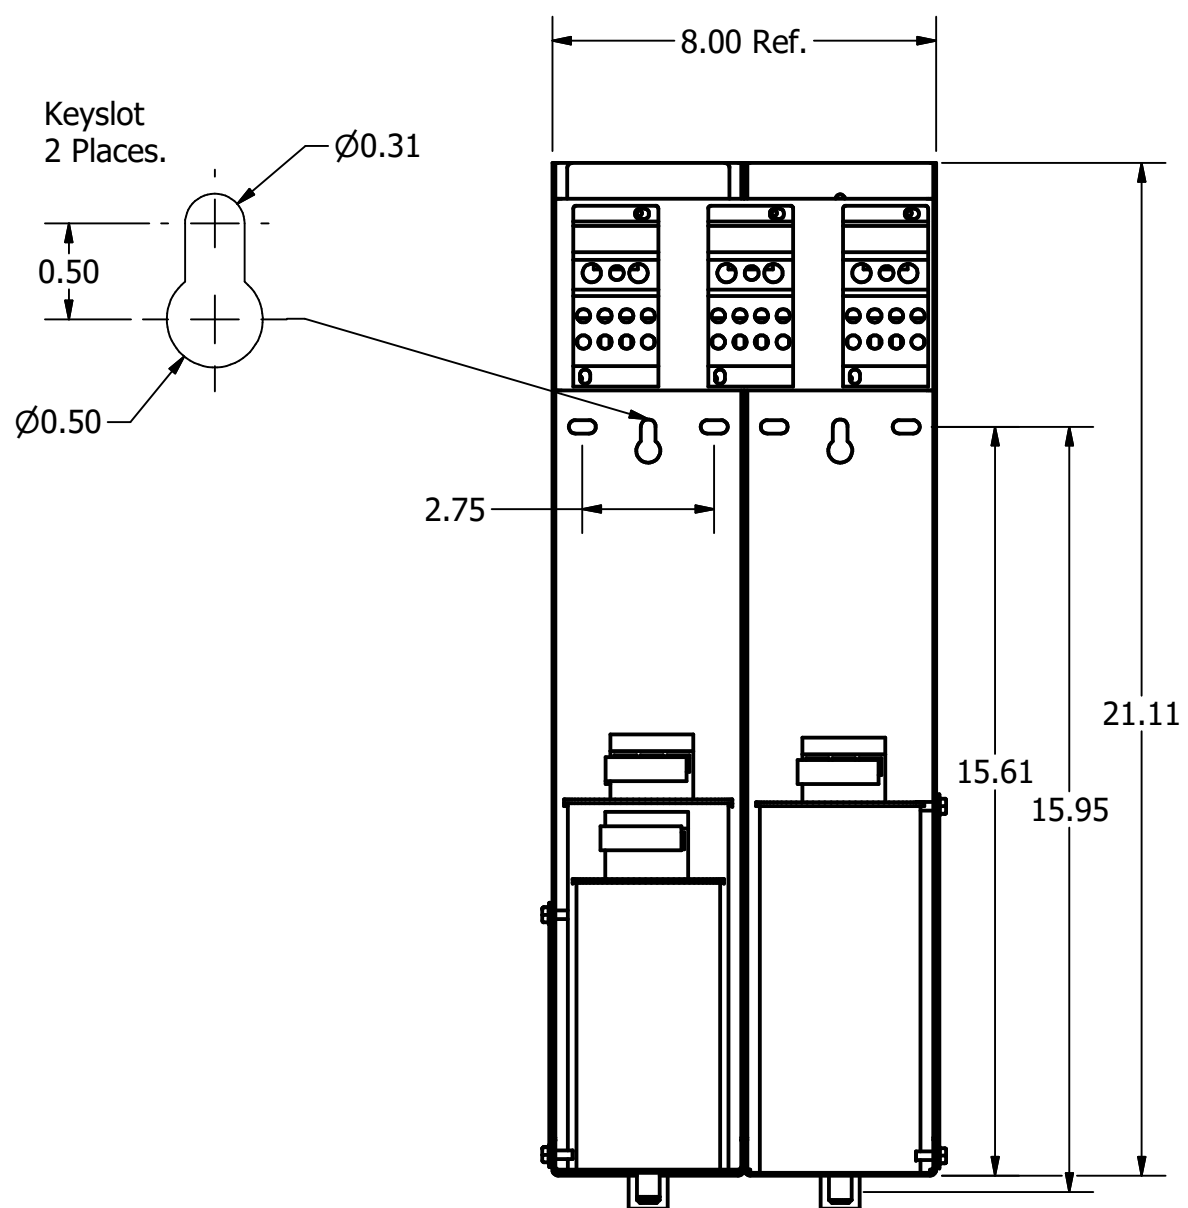

DETAIL A

HOLE TOLERANCE ± .005

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY
A	As Designed	10/21/19	JRN

TOLERANCES (EXCEPT AS NOTED)	
DECIMAL	.XX ± .25 .XXX ± .10
FRACTIONAL	± 1/16
ANGULAR	± 1°

TCI W132 N10611 Grant Drive
 Germantown, WI 53022

KPCUL043A64, 480V, 43kVAR
 Sinewave, Panelized Caps

DRN BY: JRN DATE: 10/21/19
 SCALE: To Fit APRVD: 108329DG
 SIZE: C SHT. 1 OF 1