

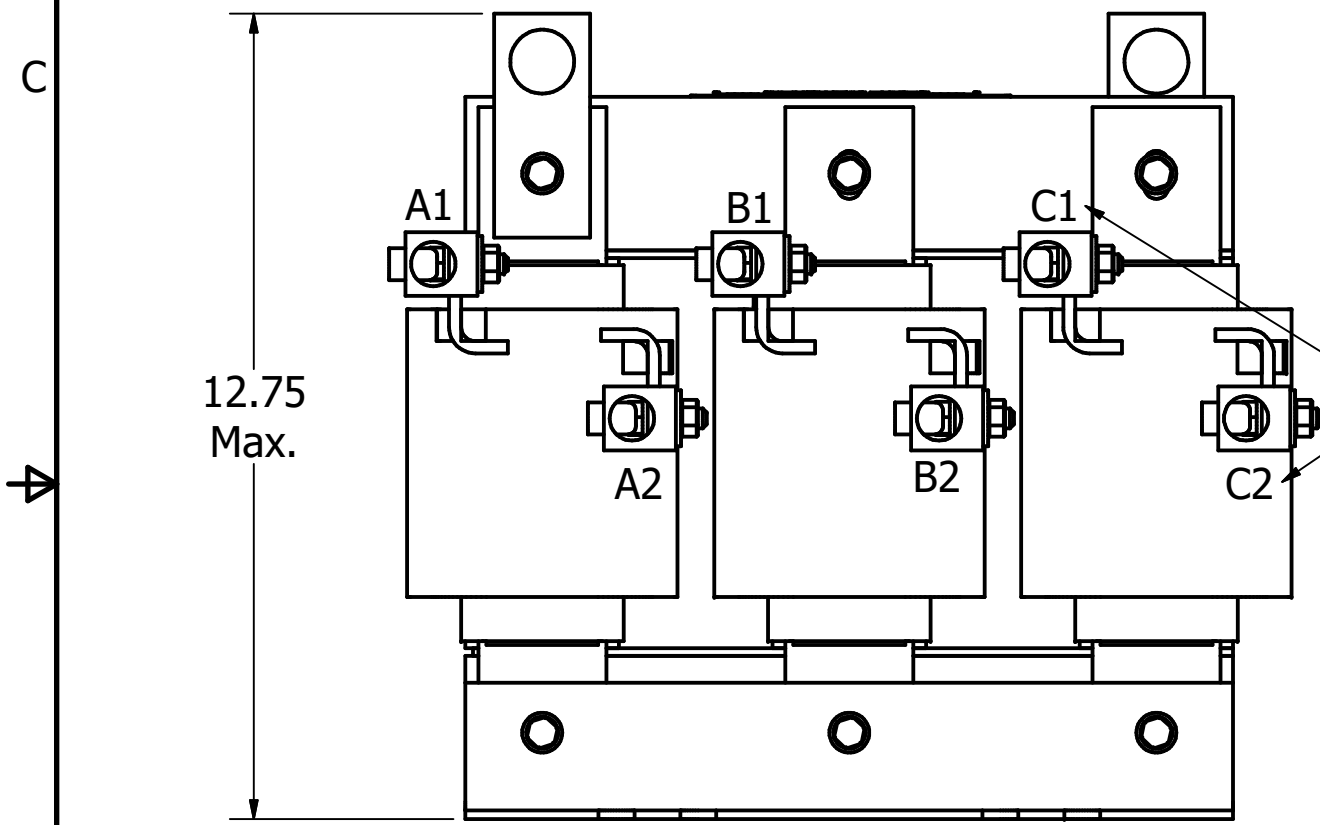


TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Attached Lug Kit
KLRUL160APTMG	160	480	60	299	160	SLK11
KLRUL200APTMG	200	480	60	239	168	SLK11

Wire Range	Tightening Torque
250MCM - 2 AWG	375 Lbs-In (42.4 N-m)
(1), (2) 25-16 mm ² (1) 35 mm ²	275 Lbs-In (31.1 N-m)

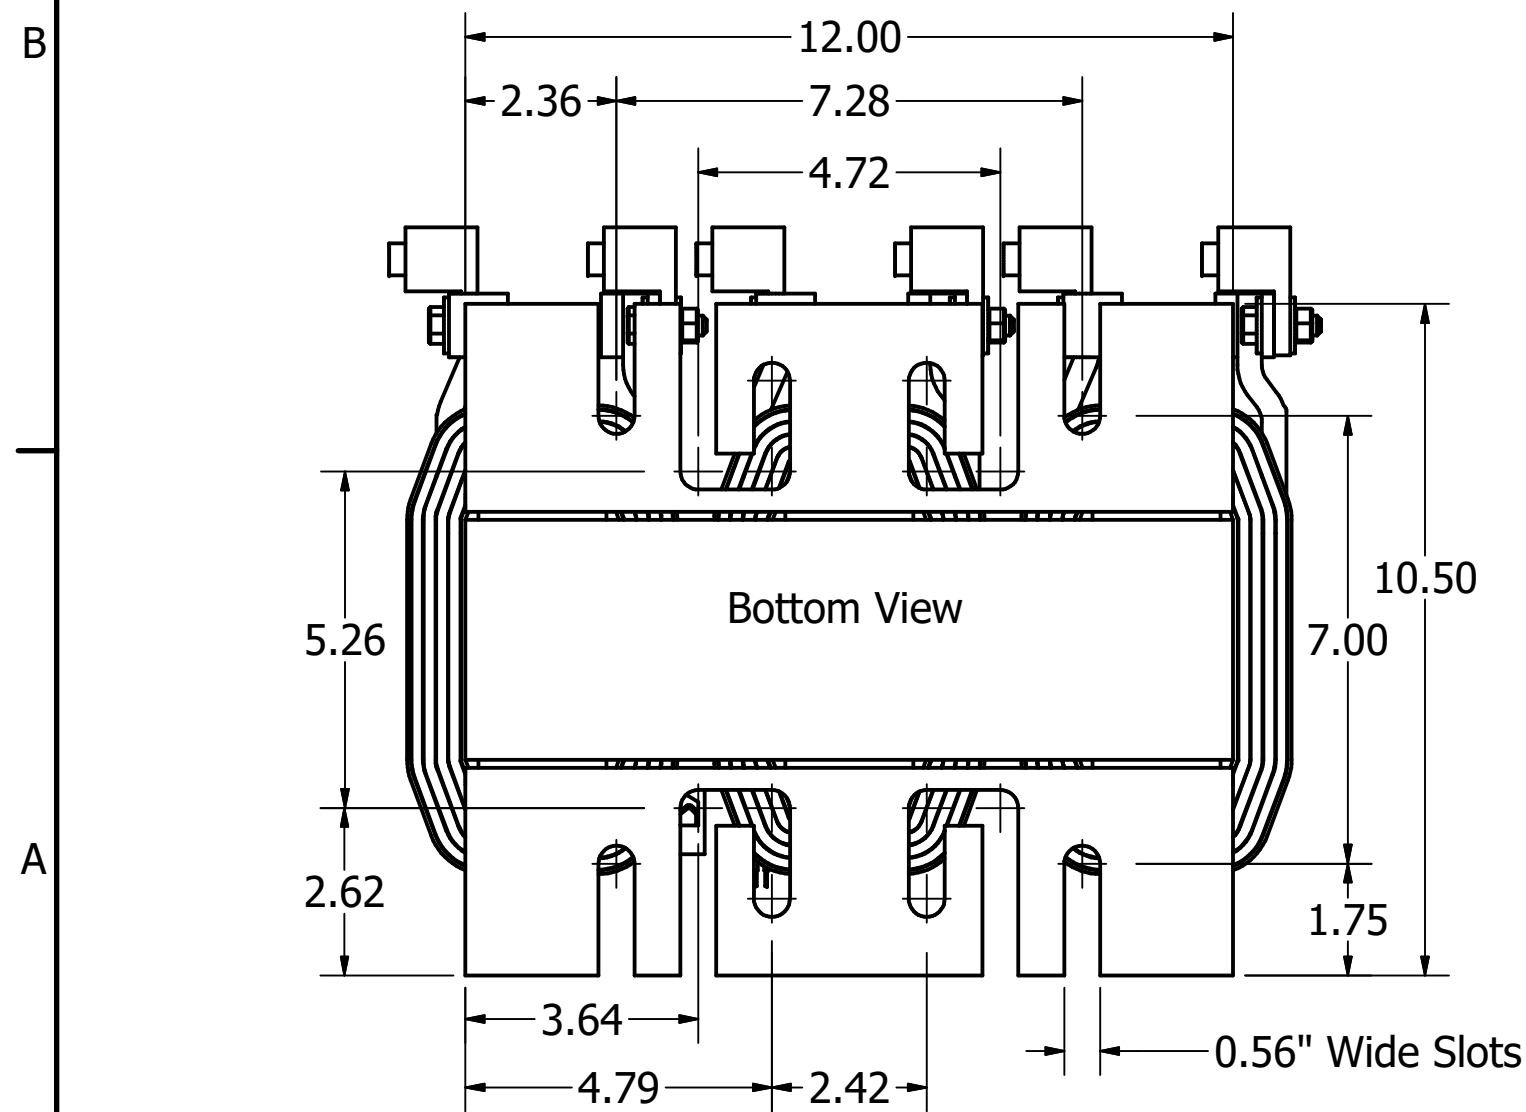

Markings on coil for reference only.

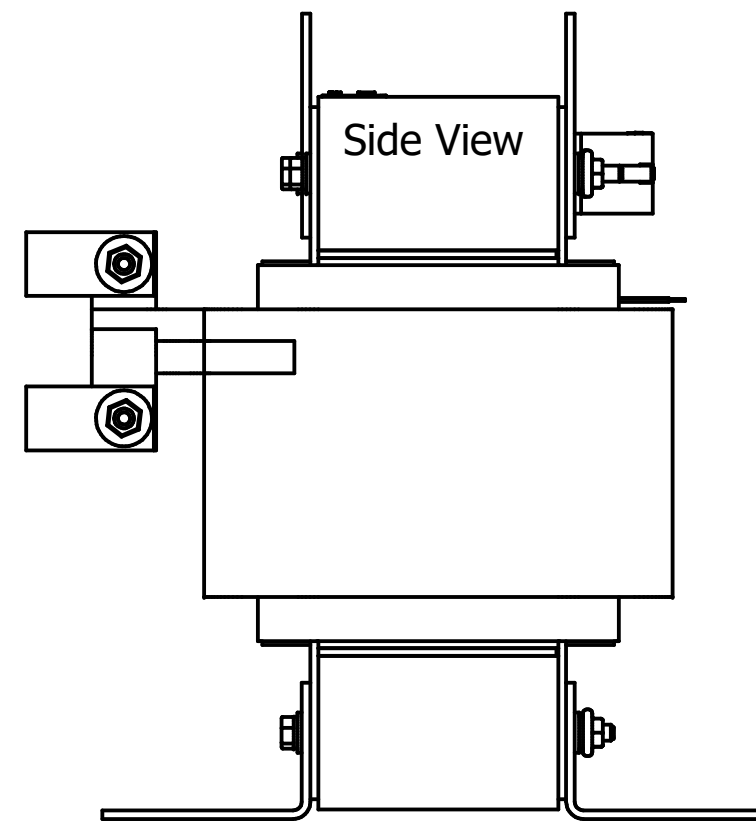

TCI (800) 824-8282 transcoll.com

TCI, LLC
Germantown, WI, USA.
transcoll.com
800-824-8282

KLRUL Reactor
KLRUL— Motor Amps —
3PH, 50/60Hz, —V Rated, 600V Max, —A Max, RoHS
40C Amb Max, RoHS
Use 75C CU conductors only, Term Torque—lb-in

UL LISTED CE
2ND CONT. EQ. MARK

Notes:

1. UL file number: cULus Listed File E116124.
2. KLR Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. Material(s) Shall be RoHS Compliant
4. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL	.XX ± .25	.XXX ± .10	
FRACTIONAL	± 1/16		
ANGULAR	± 1°		

TCI W132 N10611 Grant Drive
Germantown, WI 53022

KLRUL S Frame, 160A, 200A
Reactor Drawing, UL Listed

DRN BY: JRN DATE: 02/27/20 108475DG
SCALE: 1/3 APRVD: SIZE: C