


Thermal Switch Terminal Block

Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)



Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Attached Lug Kit
KLRUL160CPTMG	160	600	60	373	160	SLK11

Wire Range	Tightening Torque
250MCM - 2 AWG	375 Lbs-In (42.4 N-m)
(1), (2) 25-16 mm ² (1) 35 mm ²	275 Lbs-In (31.1 N-m)

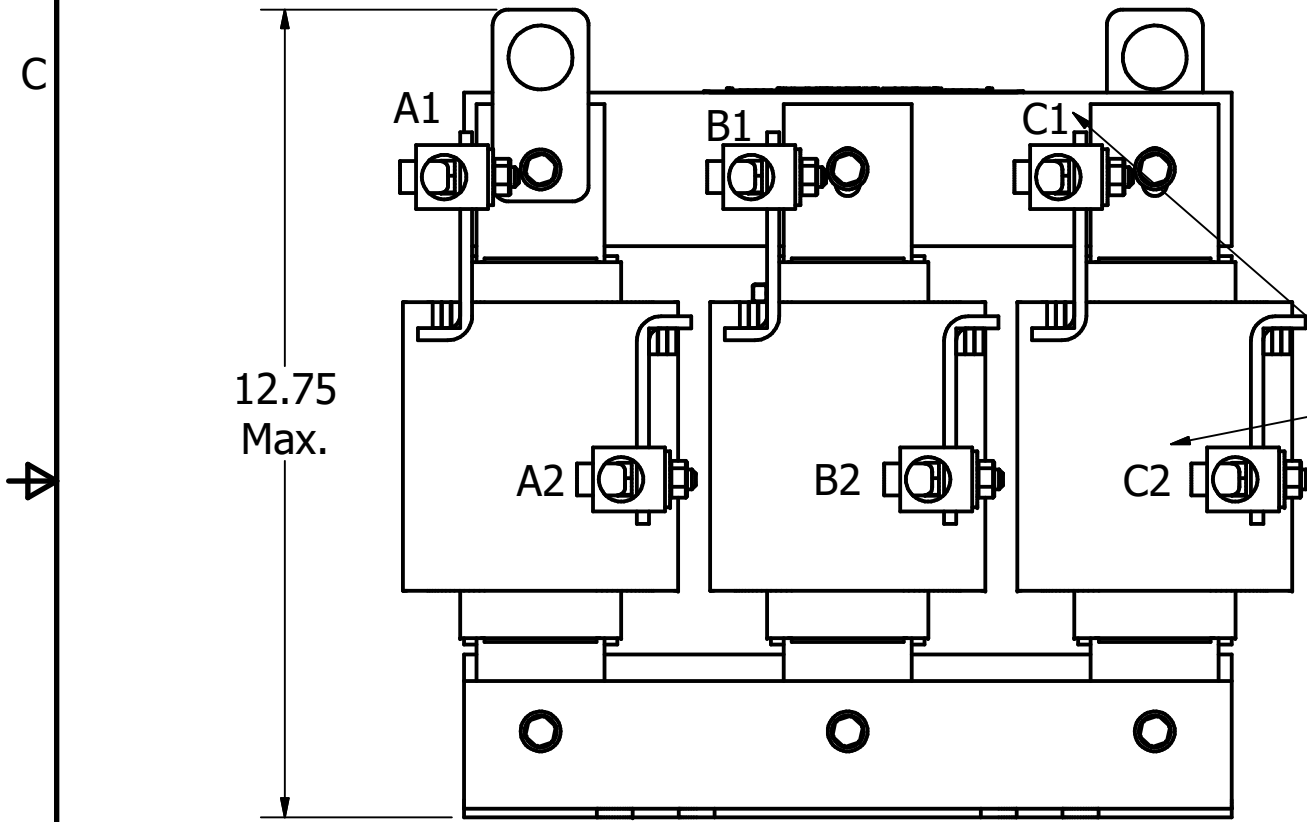

Markings on coil for reference only.

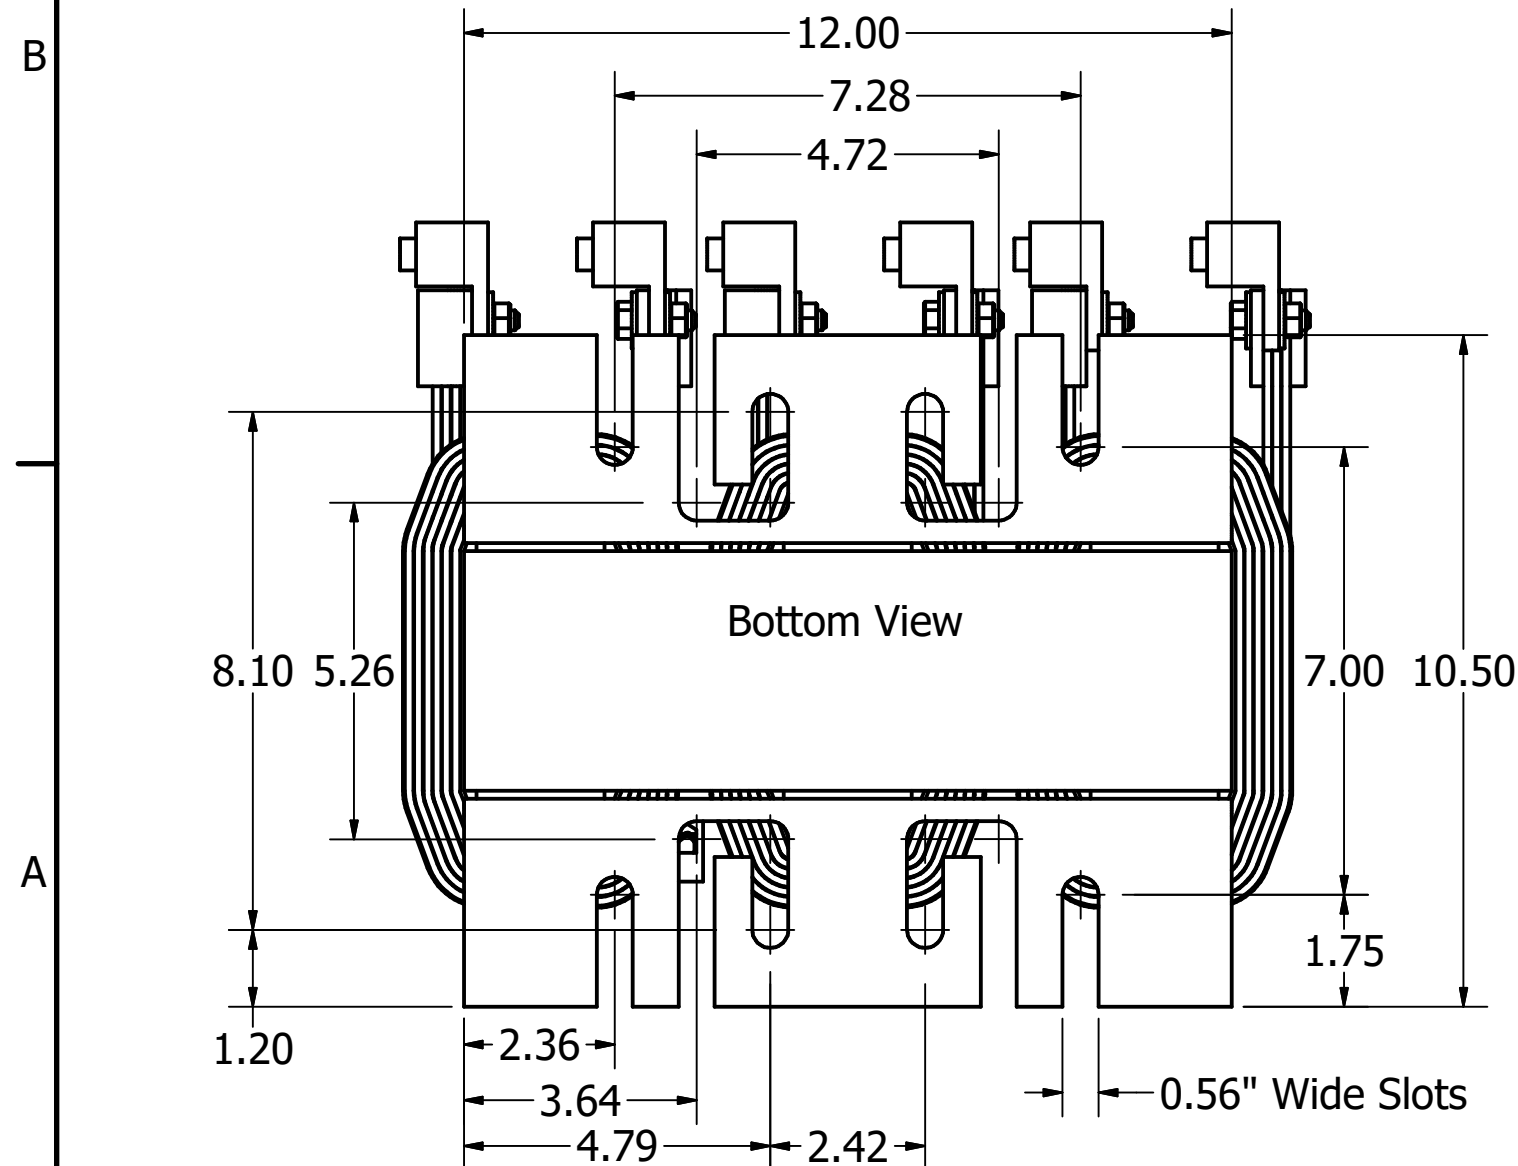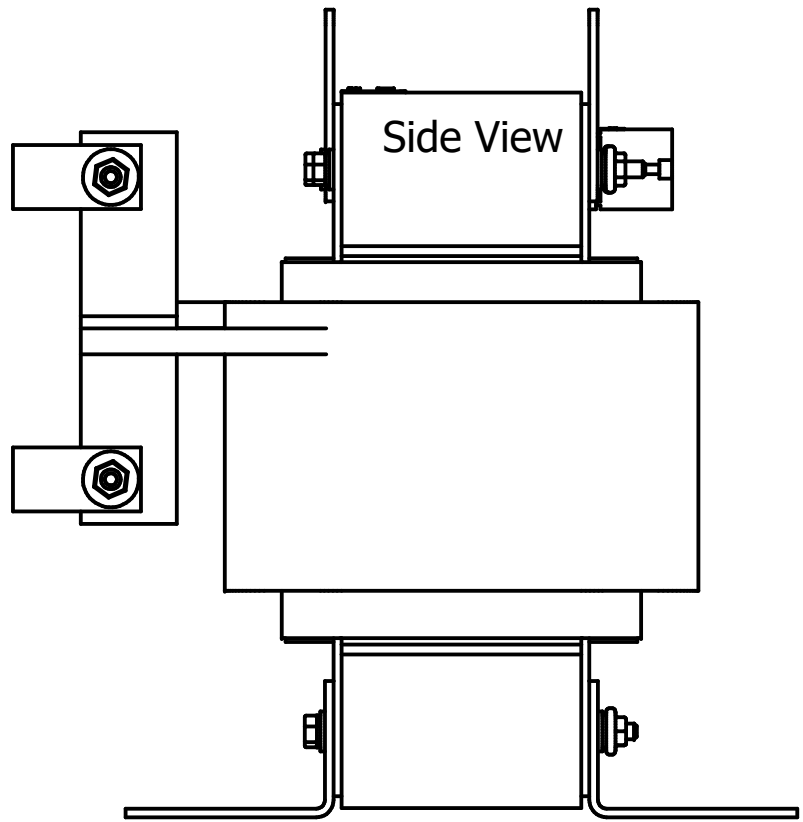

TCI (800) 824-8282 transcoll.com

TCI, LLC
Germantown, WI, USA.
transcoll.com
800-824-8282

KLRUL Reactor
KLRUL— Motor Amps —
3PH, 50/60Hz, —V Rated, 600V Max, —A Max, RoHS
40C Amb Max
Use 75C CU conductors only, Term Torque—lb-in

UL LISTED CE
2ND CONT. EQ. MARK

- Notes:
1. UL file number: cULus Listed File E116124.
 2. KLR Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. Material(s) Shall be RoHS Compliant
 4. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		W132 N10611 Grant Drive Germantown, WI 53022 KLRUL S Frame, 160A, 600V Reactor Drawing, UL Listed	
DRN BY	DATE	BY	SCALE	APRVD:	SIZE	108526DG	
JRN	03/27/20	JRN	1/3		C	SHT. 1 OF 1	
NO	REVISION	DATE	BY				