




Markings on coil for reference only.

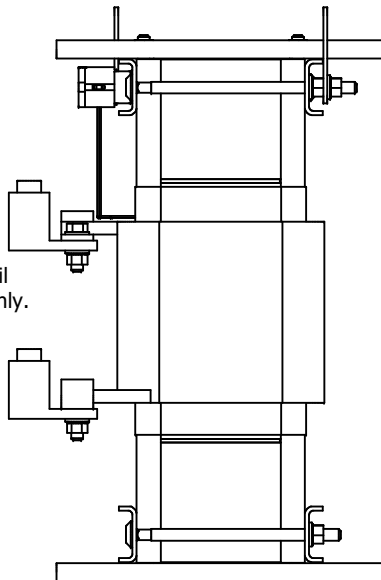

Side View

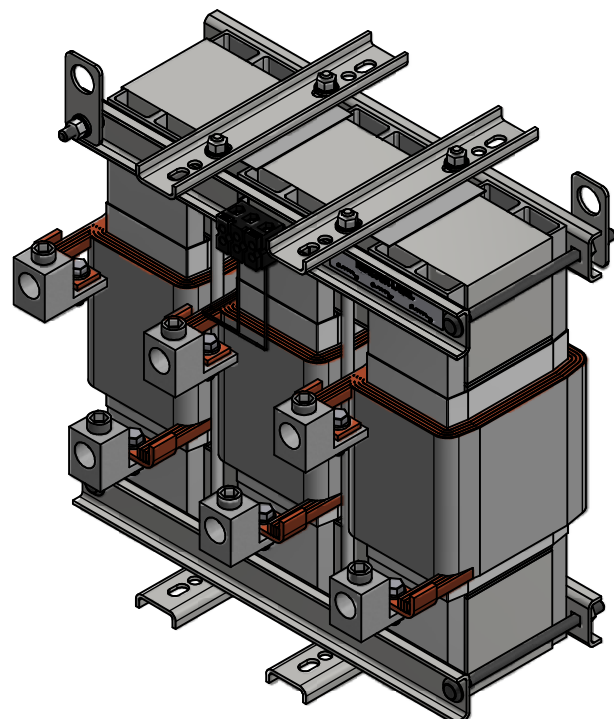

Wire Range	Tightening Torque
600MCM - 4 AWG	500 Lbs-In (56.5 N-m)

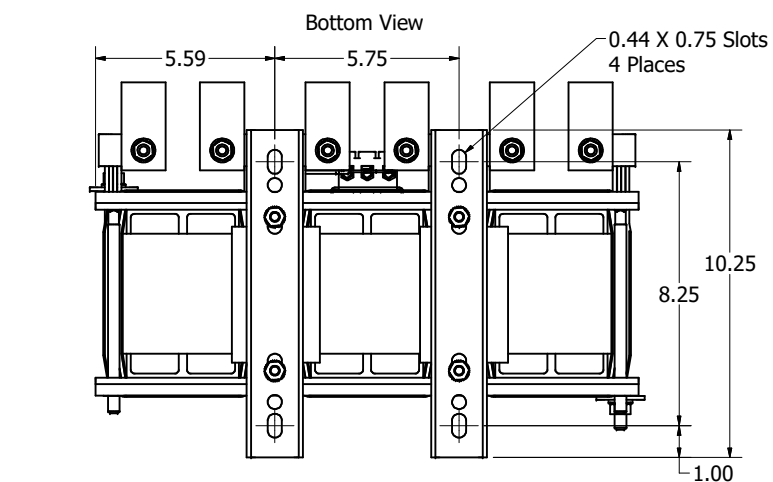

TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	--uH ±5%	Approx Weight (LBS)	Attached Lug Kit
KLRUL200CPTMG	200	600	60	299	280	SLK11

TCI (800) 824-8282 transcoil.com
 TCI, LLC
 Germantown, WI, USA
transcoil.com
 800-824-8282

KLRUL Reactor
 KLRUL — Motor Amps —
 3PH, 50/60Hz, —V Rated, 600V Max, —A Max, RoHS
 40C Amb Max
 Use 75C CU conductors only, Term Torque —lb-in

UL LISTED
 350 CONV. EQ. 0000

- Notes:
1. UL file number: cULus Listed File E116124.
 2. KLR Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. Material(s) Shall be RoHS Compliant
 4. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.25 .XXX ±.10 FRACTIONAL ± 1/16 ANGULAR ± 1°				W132N10611 Grant Drive Germantown, WI 53022 © 2021 TCI, LLC An Official Motion Company KLRUL X Frame, 200A, 600V Reactor Drawing, UL Listed		
B	5687, Update Drawing Views	8/12/2021	DSW	NO	REVISION	DATE	BY	DRN BY: JRN	DATE: 03/17/20	108527DG
A	As Designed	03/17/20	JRN	NO	REVISION	DATE	BY	SCALE: 1/2	DRWG	REV