
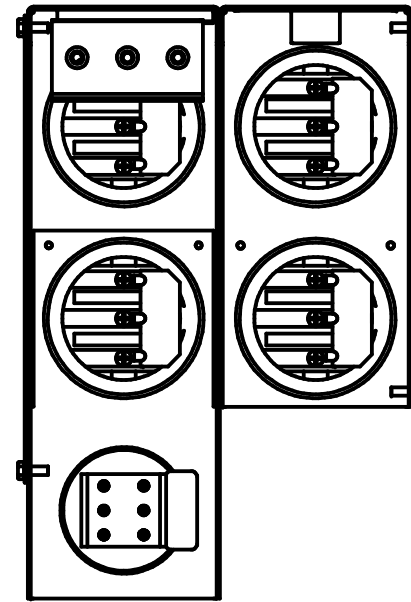


KPCUL045C64, 600V, 45kVar
 Approx. Weight: 20 Lbs


Customer Input	
Wire Range	Tightening Torque
8-2/0 Awg	35.5 Lb-In

Cap Connection	
Wire Range	Tightening Torque
14-4 Awg	17.5 Lb-In




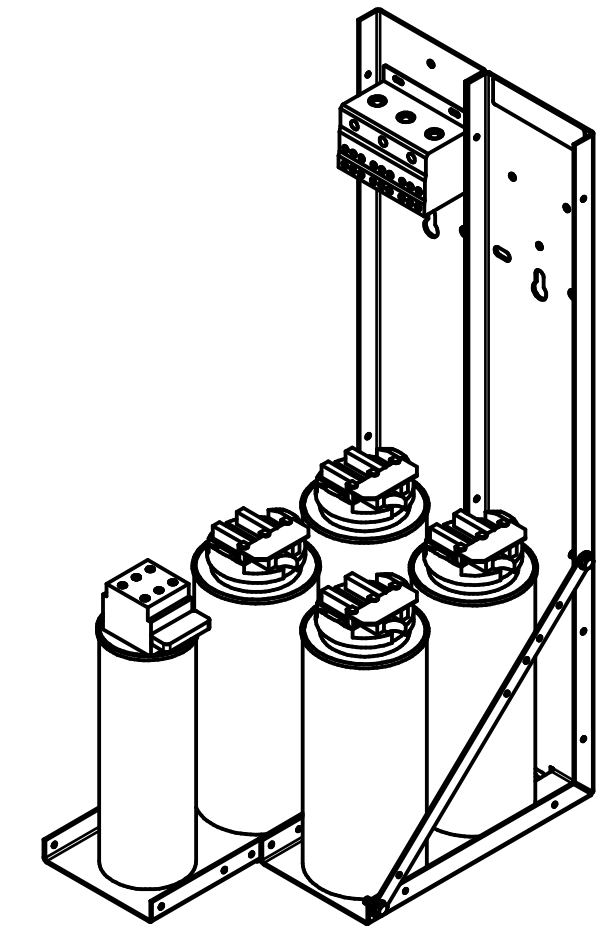


D
C
B
A

D
C
B
A

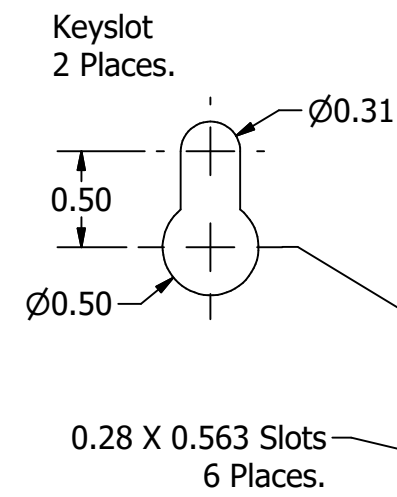

0.28 X 0.563 Slots
 6 Places.

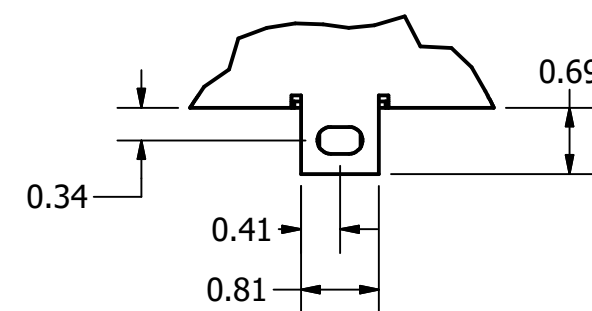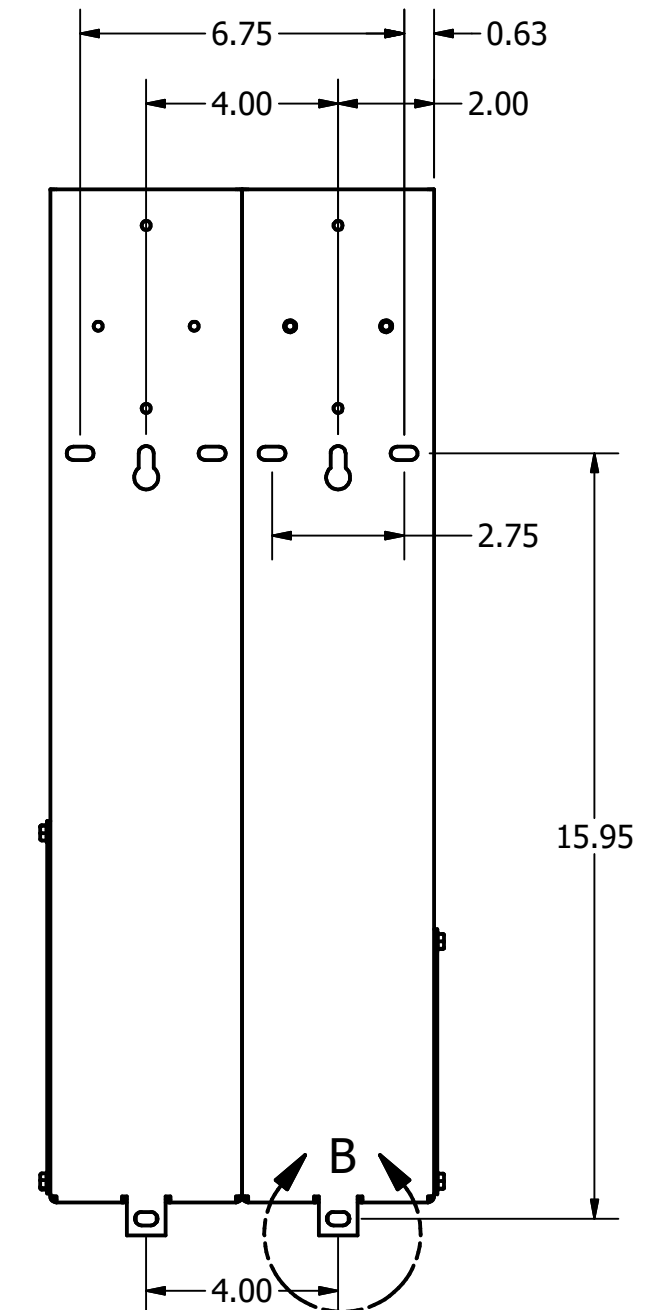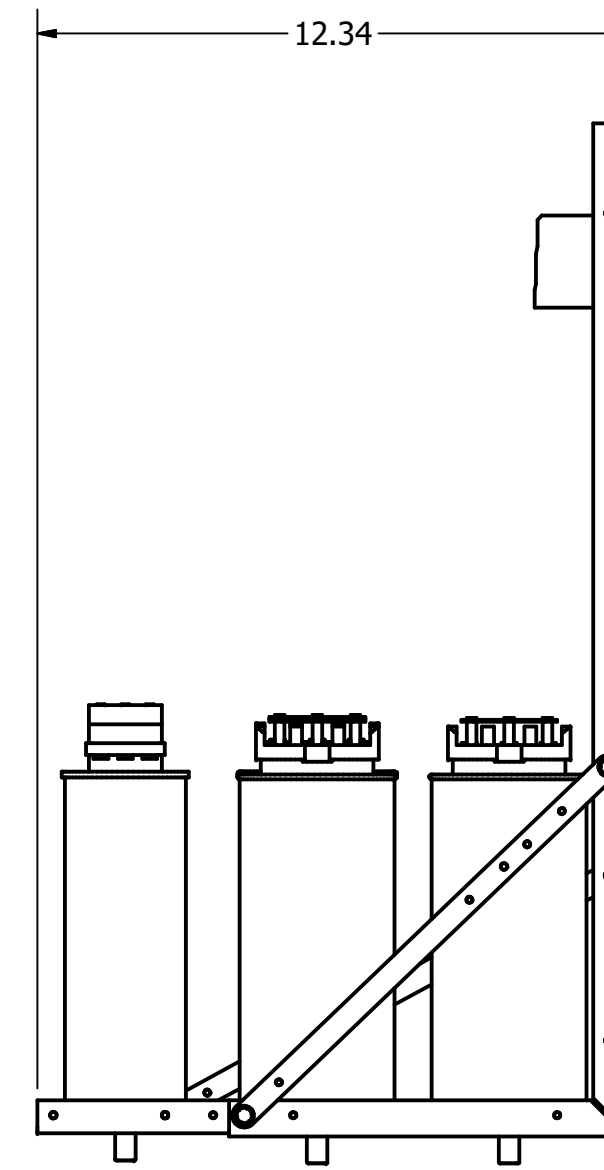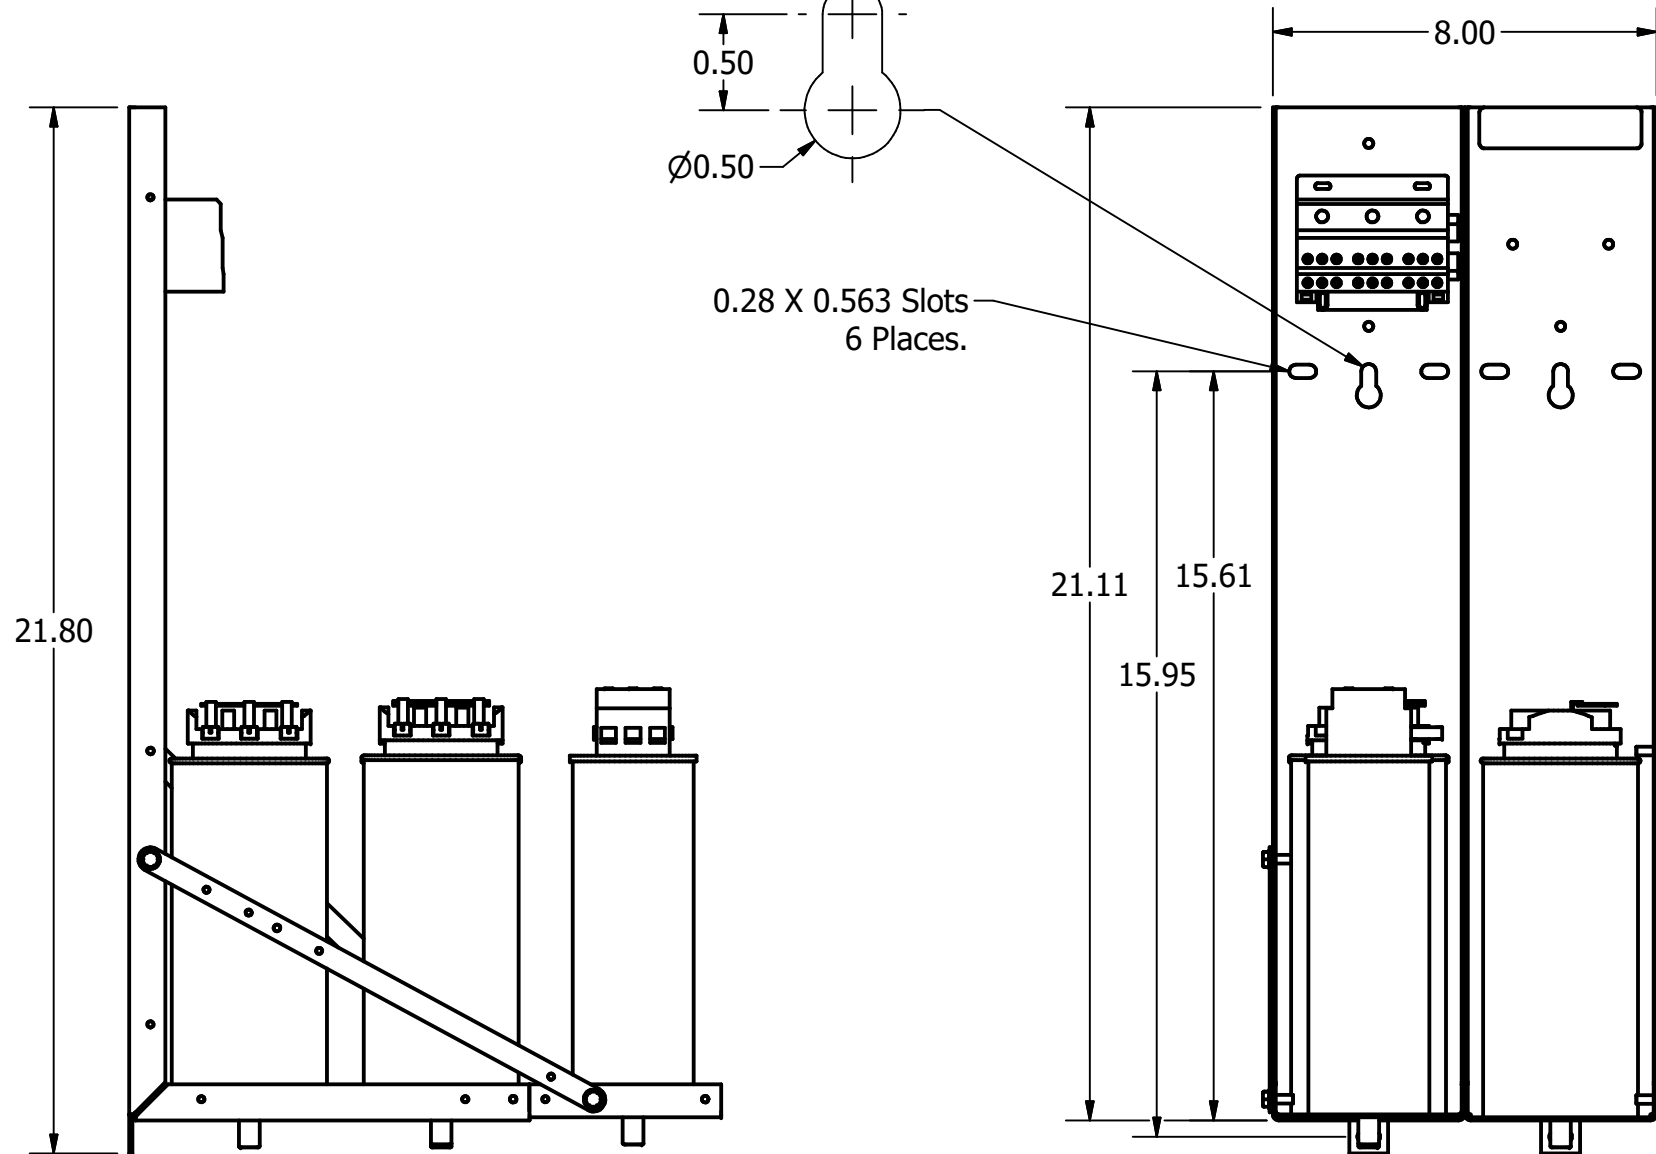

DETAIL B

Note: 27908, Manual KPC Installation Guide
 MUST SHIP WITH EACH ASSEMBLY.

HOLE TOLERANCE ± .005

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		W132 N10611 Grant Drive Germantown, WI 53022
B	5284 Updated Caps	06/04/20	JRN	FRACTIONAL ± 1/16	KPCUL045C64, 45kVar Panelized Caps, Sine Wave	
A	As Designed	03/25/20	JRN	ANGULAR ± 1°		DRN BY: JRN DATE: 03/25/20 SCALE:
NO	REVISION	DATE	BY			

4

3

2

1