
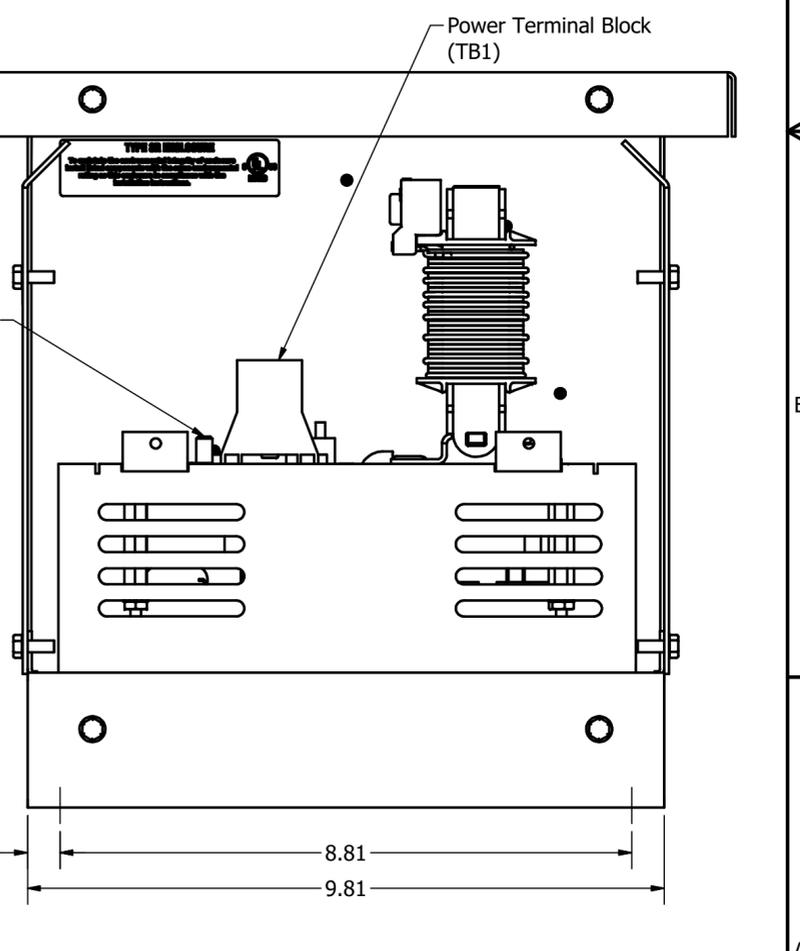


V1K Type 3R Units					
V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)	
V1K2A03*	600	2	3	28	
V1K3A03*	600	3	3	28	
V1K4A03*	600	4	3	28	
V1K6A03*	600	6	3	28	
V1K8A03*	600	8	3	28	
V1K12A03*	600	12	3	28	

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

See V1K Installation Guide For Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

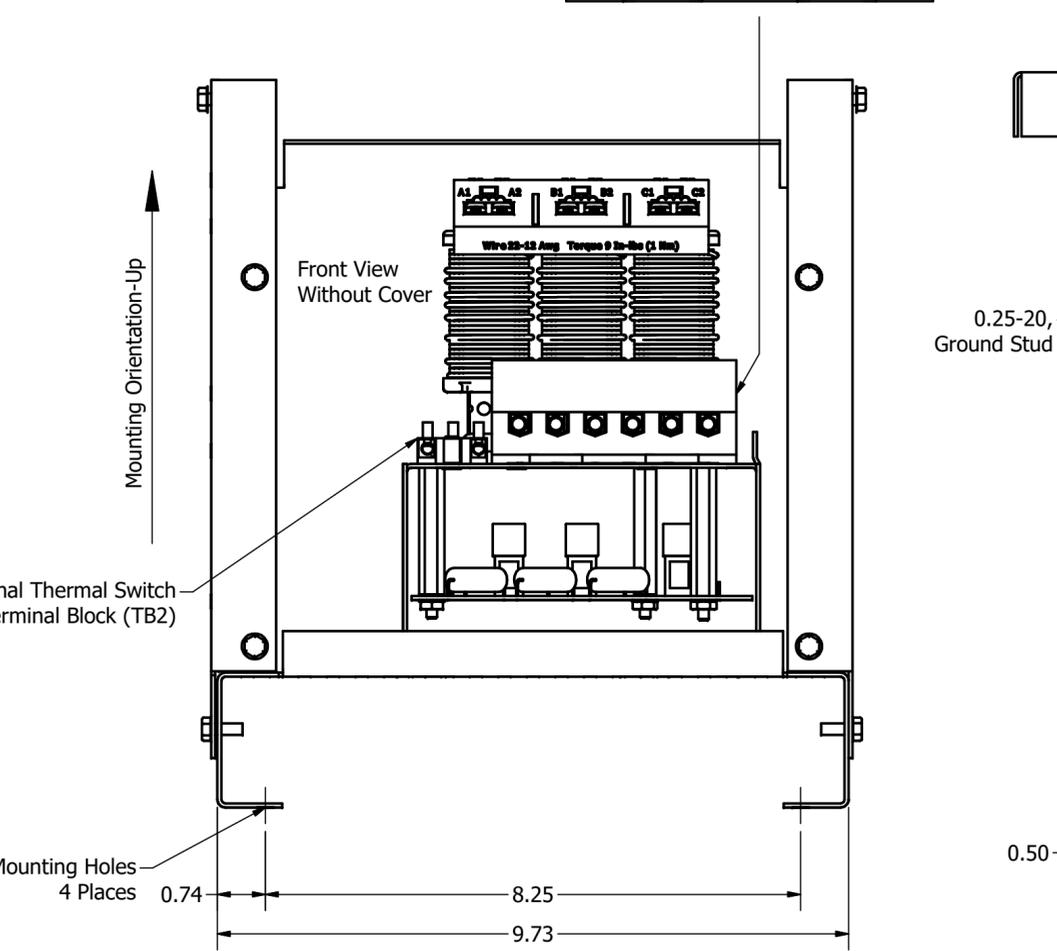

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		 An Allied Motion Company	W132N10611 Grant Drive Germantown, WI 53022 © 2021 TCI, LLC
A As Designed		06/24/21	JRN	FRACTIONAL ± 1/32	DRN BY JRN		DATE 06/24/21
NO REVISION		DATE	BY	ANGULAR ± 1°	SCALE: TO FIT	APRVD:	SIZE C