




Dimension Table				
Enclosure	"A" Dim	"B" Dim	"C" Dim	"D" Dim
Type 1	26.5	23.0	2.0	1.2
Type 3R	28.5	22.1	3.9	2.1

Power (HP)	HSD / HSL	Voltage (V)	Phase	Frequency (Hz)	Harmonic	Contactor	PQ Connect	Weight (lb)
25	HSD / HSL	480 & 600	3	60	5TH	With	With	105
30	HSD / HSL	480 & 600	3	60	5TH	With	With	140
40	HSD / HSL	480 & 600	3	60	5TH	With	With	180
50	HSD / HSL	480 & 600	3	60	5TH	With	With	180

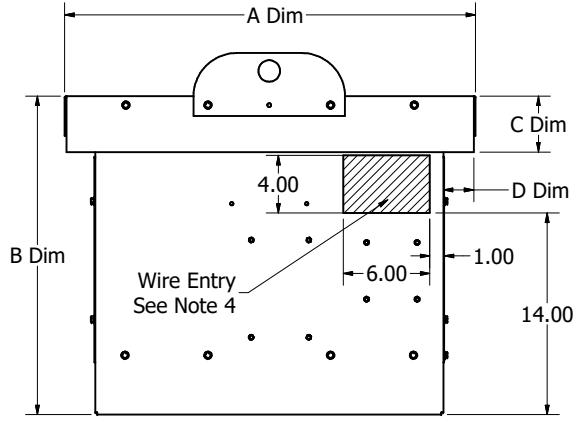


Left Side View


Component Layout

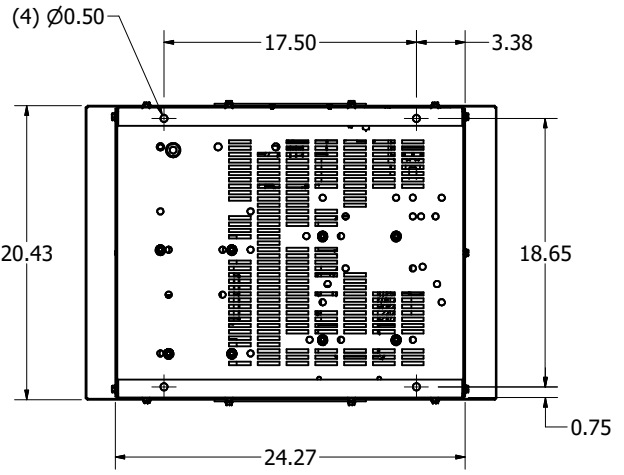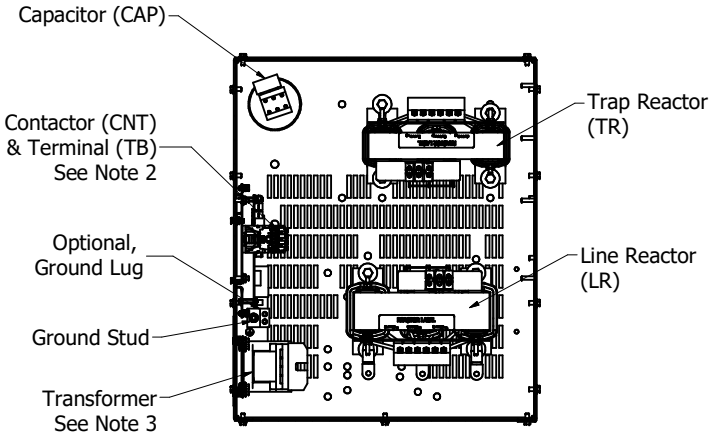

Bottom View
With Mounting Dimensions

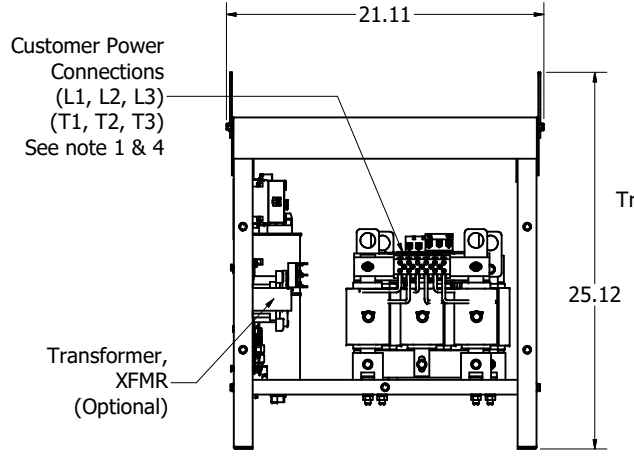


Front View
With Front Cover Removed

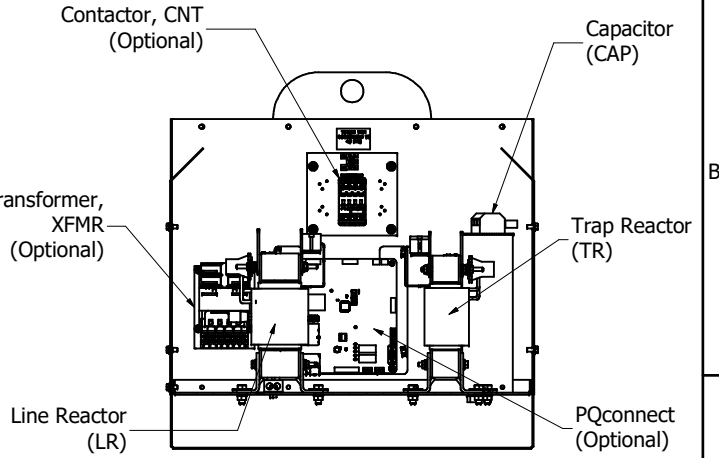

Right View
With Right Cover Removed

- Notes:
1. Refer to manual for wire size and torque.
 2. Contactor (CNT) and Terminal (TB) are optional.
 3. PQconnect with Transformer is optional.
 4. Refer to schematic # 30047, PQ Schematic 30047-PQ.
 5. Preferred wire entry area.
 6. Wire entry is allowed through the bottom.
 7. Enclosure is shown with a Type 3R top.
 8. Use only hubs or fittings that comply with UL514B for Type 3R applications.
 9. Installation must meet all national and local codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		 W132N10611 (Rev 11/16) Germantown, WI 53022 © 2023 TCI, LLC	
D	6367, Included 25HP HSD/HSL with PQ	8/02/23	JSG	An Allied Motion Company HarmonicShield 480V & 600V 25HP-50HP			
C	6356, HSL annexation	6/02/23	JSG	109000DG SCALE: 1:6.4			
B	Added D dimension reference	10/19/22	JSG	DATE: 7/28/2021 DRAWN BY: DSW CHECKED BY: JSG			
A	As Designed	7/28/2021	DSW	DATE: 7/28/2021 DRAWN BY: DSW CHECKED BY: JSG			
NO	REVISION	DATE	BY	SCALE: 1:6.4 SHEET 1 OF 1			

Material(s) Shall be RoHS Compliant