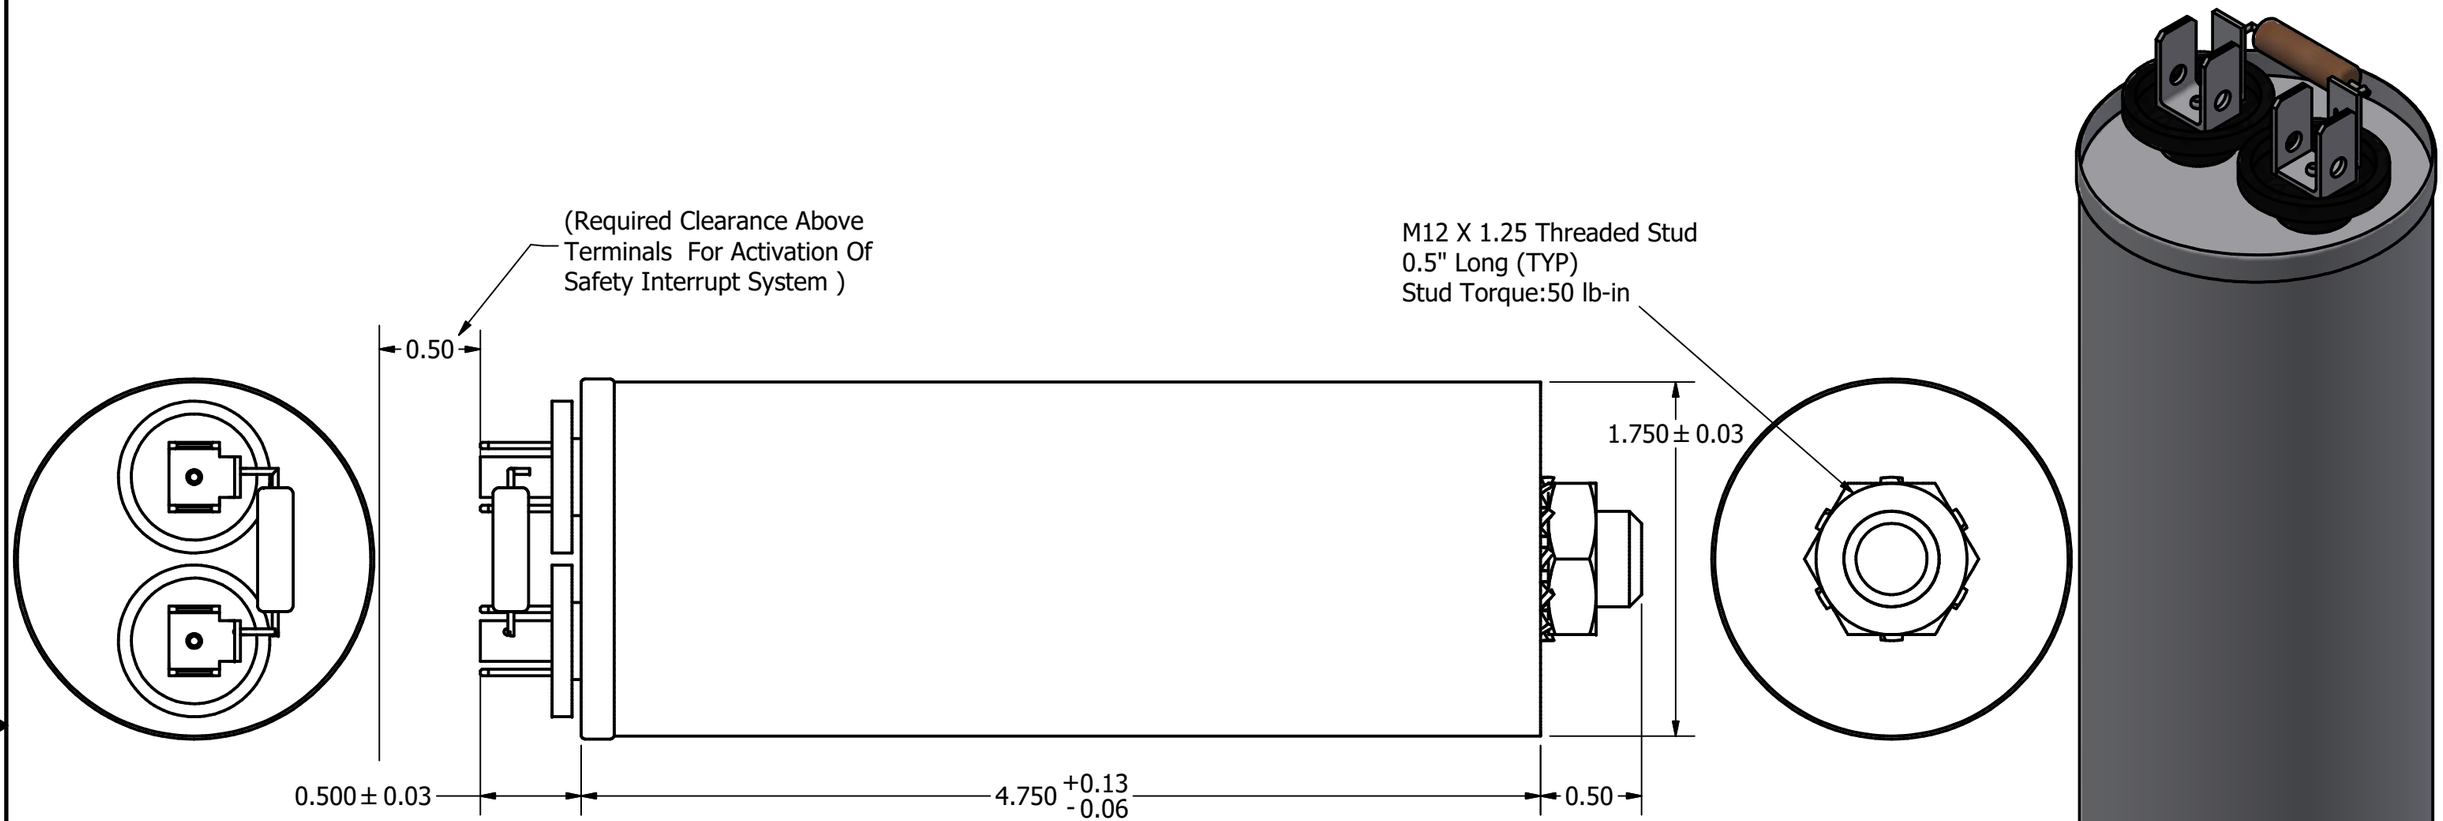

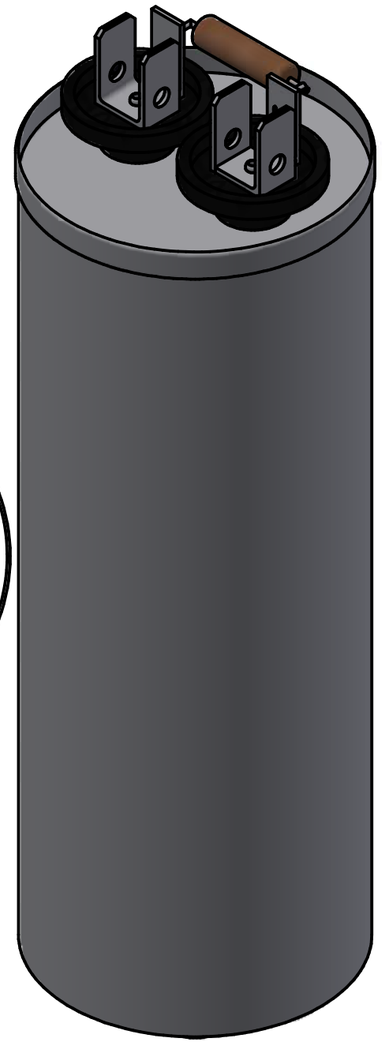

VOLTS	60 HZ
440	30uF

Approx Weight: 0.50lbs

Material(s) Shall be RoHS Compliant

30uF 440V	CASE MAX 70° C
1 Phase	NON PCB
ASC X386S(0109) 30-10-440VAC	

DIMENSIONS IN INCHES (EXCEPT AS NOTED)

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .03
.XXX ± .010
FRACTIONAL
± 1/32
ANGULAR
± 1°

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.

NO	ECO	REVISION	DATE	BY
A		As Drawn	1/14/20	DSW

DRN. BY: DSW
DATE: 1/14/20

Allient Power
W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Allient Inc.

Cap, ASC X386S, 30uF, 440V

SCALE:
DRN. NO. 26791
SIZE B
SHT.1 OF 1