



Capacitor, 2.1kVar, 480V, 60Hz
Oil Version, Spring Clamp, Vishay.
3 x 8uF Delta Connection

Approx Weight: 1.76 LBS

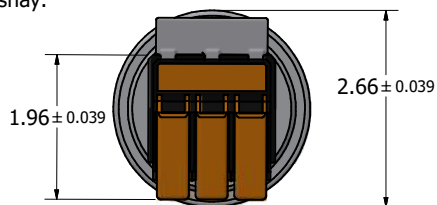

Wire Range: 14 AWG To 4 AWG
Strip Length: 0.71 IN.
Wire Insulation Insertion Depth: 0.315 IN.
Maximum Ferrule Dimensions: Rectangular 0.299 IN Wide
By 0.236 IN Thick, Long Dimension Horizontal.

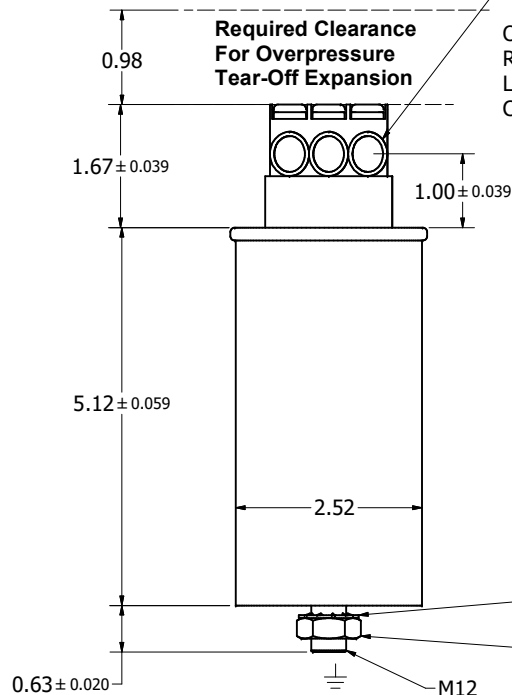


Required Clearance
For Overpressure
Tear-Off Expansion

Open Lever to Insert Wire
Release or Close Lever After Wire Is Inserted to Clamp Wire.
Lever Is Designed for at Least 10 Operating Cycles.
Continuous Use Can Result in Excessive Wear.

Lock Washer

Nut

M12




Mounting Nut Tightening Torque: 88.5 (LBS-IN) 10 [Nm].


Ø2.52

**Warning: Bleeder Resistor Must Be Installed
In Every Capacitor
Capacitor Voltage Will Not Discharge After
Switching Power Off Without Bleeder Resistor Installed.**

Press Orange Plate Marked "PUSH" To Insert Resistor
Leads Into Capacitor Terminal Block.
Body Of Resistor Will Be Flush With Terminal Block.



Bleeder Resistor

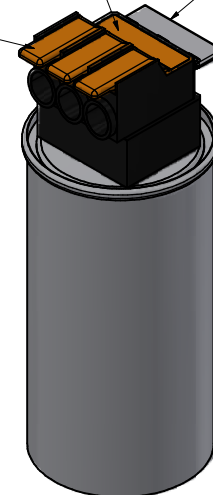


Warning



After switching off the power, always allow 5 minutes for the capacitors in the filter and in the drive to discharge before working on the filter, the drive, the motor, or the connecting wiring. It is a good idea to check with a voltmeter to make sure that all sources of power have been disconnected and that all capacitors have discharged before beginning work.

Material(s) Shall be RoHS Compliant
Material(s) shall meet REACH requirements

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev 13) 50022 © 2022 TCI, LLC Cap, 2.1kVar, 480V, 60Hz Oil, Spring Clamp, Vishay.			
				DECIMAL					
				.XX ± .06 .XXX ± .03					
				FRACTIONAL					
A	As Drawn	12/08/2023	DSW	± 1/32		DRN BY DSW	DATE 12/08/2023	32608	
NO	REVISION	DATE	BY	± 1"		SCALE 1:1.3	DRN BY	32608	

32608

SHT 1 OF 1