


RB BLEED RESISTORS
ON CAPACITOR TERMINALS

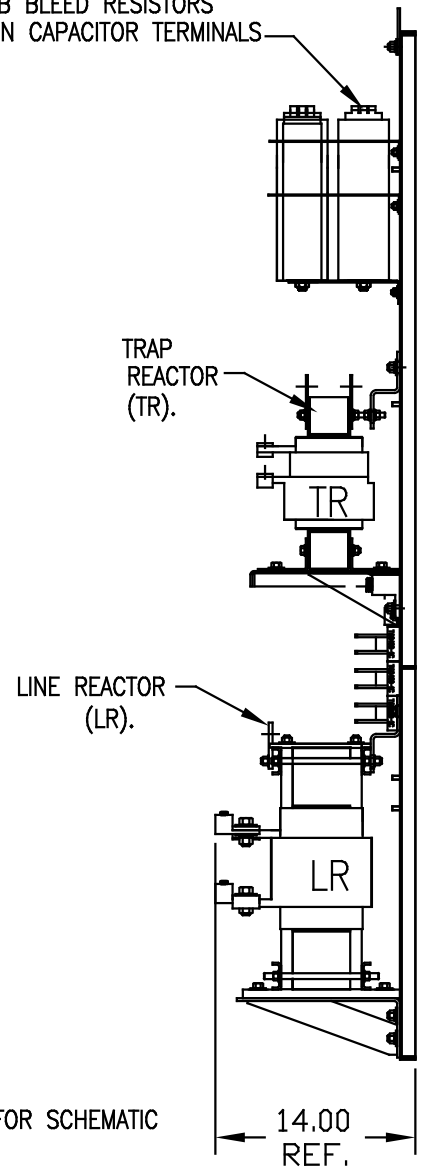

SEE 25078 FOR SCHEMATIC

.50 DIA.
10 MOUNTING HOLES:

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
105	5TH	480	60	3	350
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		500			

SYMBOL	TCI PART NUMBER
LR	KDRX2T
TR	KTR105A65HG
CAP1, CAP2, CAP3	
CAP4,	23123
CAP5	16448
CAP6	16449
Fu1, 2, 3	13332

CUSTOMER CONNECTIONS:

WIRE RANGE-TWO 350MCM-4

TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:

WIRE RANGE-ONE 600MCM-4


TWO 250MCM-1/0

TIGHTENING TORQUE 500 IN-LB.

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CUSTOMER CONNECTIONS:



				TOLERANCES EXCEPT AS NOTED:	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				.XX ±.03 .XXX±.01	
				FRACTIONAL ± 1/32	HG350AW00ST, HG7 STANDARD 350HP, 480/3/60 OPEN
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY	SCALE TO FIT	DESIGNED BY DSW DATE 03/04/05 DRAWING NO. C 102551DG SHEET 1 OF 1