
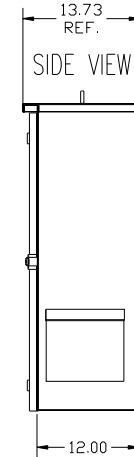
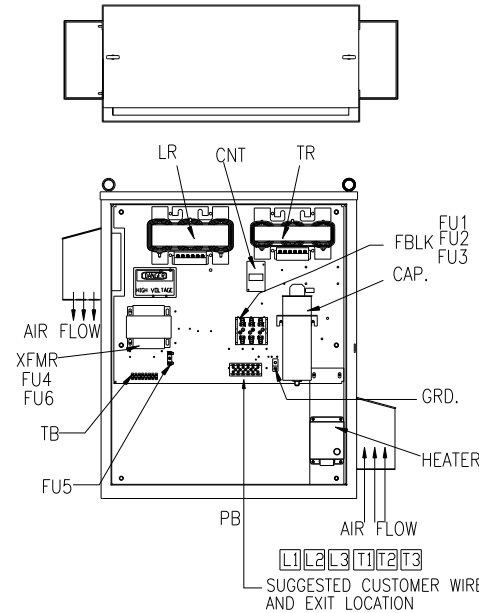
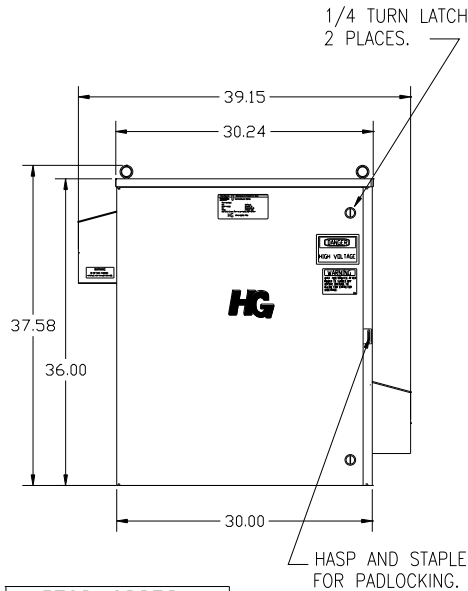
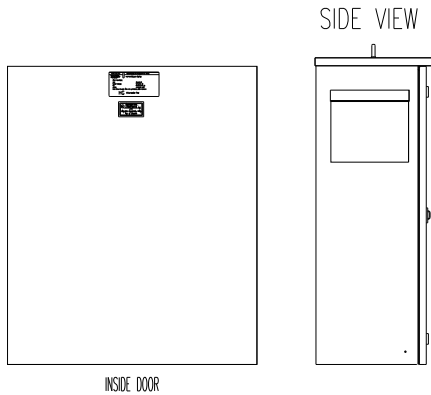
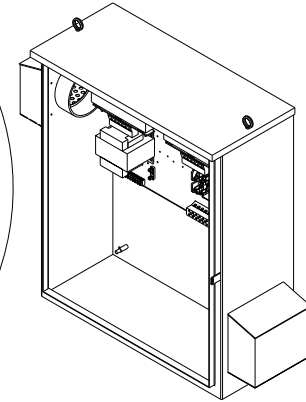
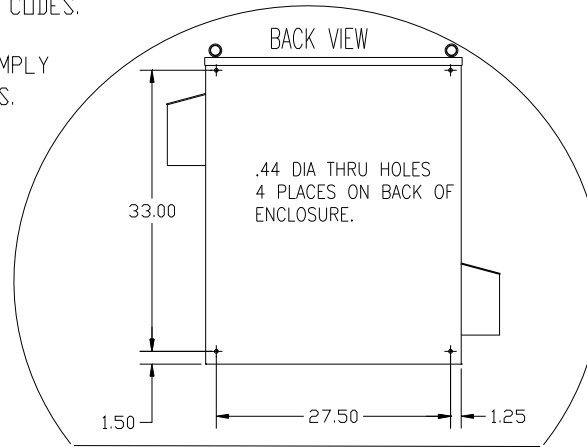


CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26972 FOR SCHEMATIC

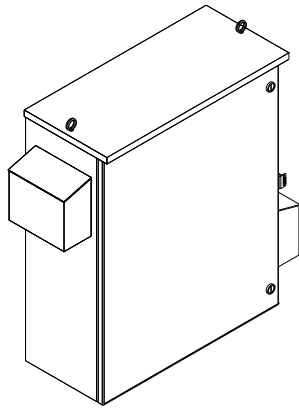

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
15	5TH	600	60	3	50
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX. WT. LBS.		255			

HG50CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FU5	X
CNT	X
HEATER	X

PB—POWER INPUT BLOCK:  
WIRE RANGE—#18 TO #4 AWG.  
TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:  
WIRE RANGE TIGHTENING TORQUE.  
1/0-3 AWG. 50 IN-LBS  
4-6 AWG. 45 IN-LBS  
8 AWG. 40 IN-LBS  
10-14 AWG. 35 IN-LBS

				TOLERANCES (EXCEPT AS NOTED):		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224			
				DECIMAL		HG50CW03STCH, 50HP 600/3/60 UL TYPE 3R			
				.XX ± .12				DRN BY DSW DATE 02/17/09 DWG NO. 103747DG	
				.XXX ± .03					
3033 UPDATE LAYOUT		2/19/14 DSW		FRACTIONAL ± 1/32		SCALE TO FIT			
A2641 ADD EYEBOLTS		10/21/09 DSW		ANGULAR ± 1/2°					
NO REVISION		DATE BY				SHT. 1 of 1			