
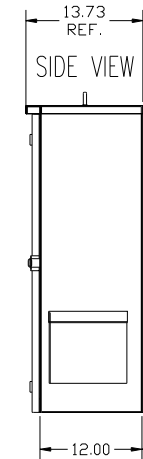
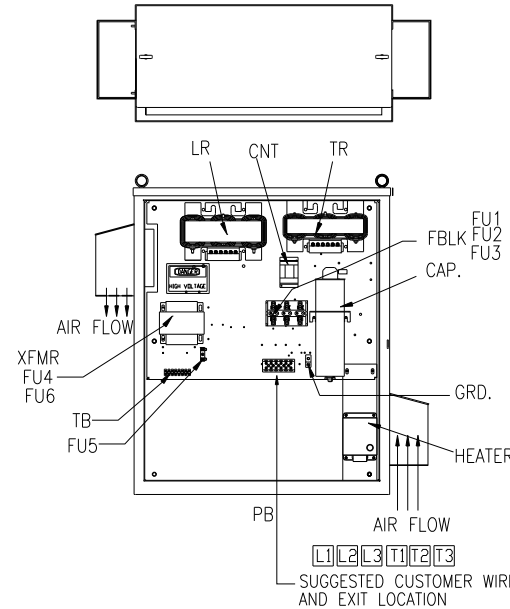
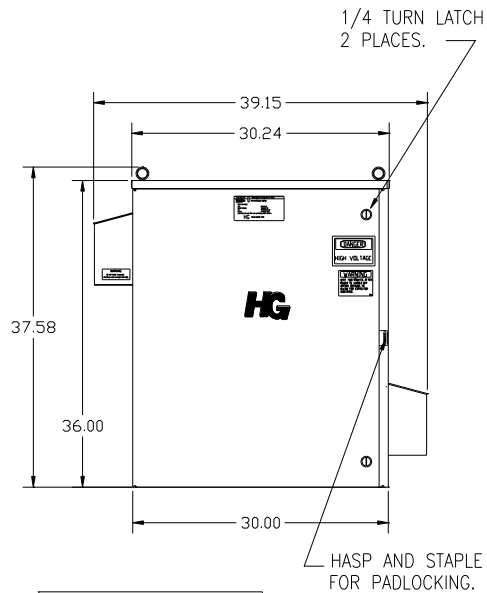
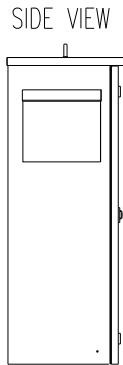

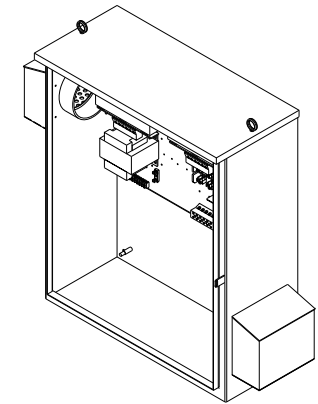
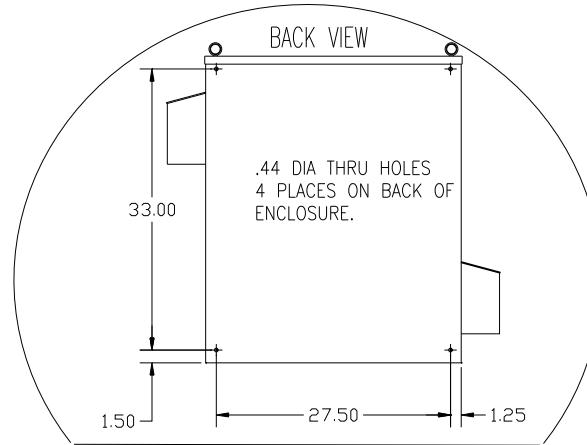


CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26972 FOR SCHEMATIC

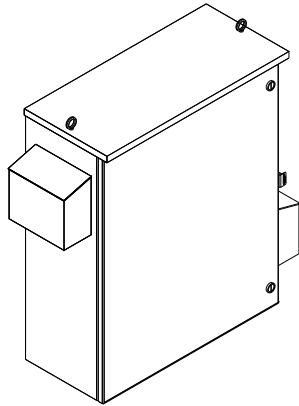

INSIDE DOOR

SIDE VIEW

SIDE VIEW

UNIT SPECIFICATIONS:

KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	600	60	3	60
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX. WT. LBS.		265			

HG60CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FU5	X
CNT	X
HEATER	X

PB--POWER INPUT BLOCK:

1 AWG thru 4 AWG 35 IN.-LBS. MAX.
6 AWG thru 14 AWG 30 IN.-LBS. MAX.
16 AWG thru 20 AWG 25 IN.-LBS. MAX.
22 AWG 20 IN.-LBS. MAX.

GROUND LUG:

WIRE RANGE-2/0 TO #6 AWG.
TIGHTENING TORQUE 120 IN.-LB.

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224			
				DECIMAL		HG60CW03STCH, 60HP 600/3/60 UL TYPE 3R			
				.XX ± .12				DRN BY DSW DATE 02/18/09 DWG NO. 103748DG	
				.XXX ± .03					
B 3033 UPDTE LAYOUT		2/19/14 DSW		FRACTIONAL ± 1/32		SCALE TO FIT			
A 2641 ADD EYE BOLTS		10/21/09 DSW		ANGULAR ± 1/2°					
NO REVISION		DATE BY				SHT. 1 of 1			