


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
270	5TH	600	60	3	900
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		1325			

SYMBOL	TCI PART NUMBER
LR	KDRY45T
TR	KTR270C65HG
CAP1 - 13 (20KVAR)	18612
CAP14 (10KVAR)	17816
Fu1, 2, 3	13329


CUSTOMER CONNECTIONS:
 WIRE RANGE—THREE 600MCM-2
 TIGHTENING TORQUE 375 IN.-LB.
 GROUND LUG:
 WIRE RANGE—THREE 600MCM-2
 TIGHTENING TORQUE 375 IN.-LB.

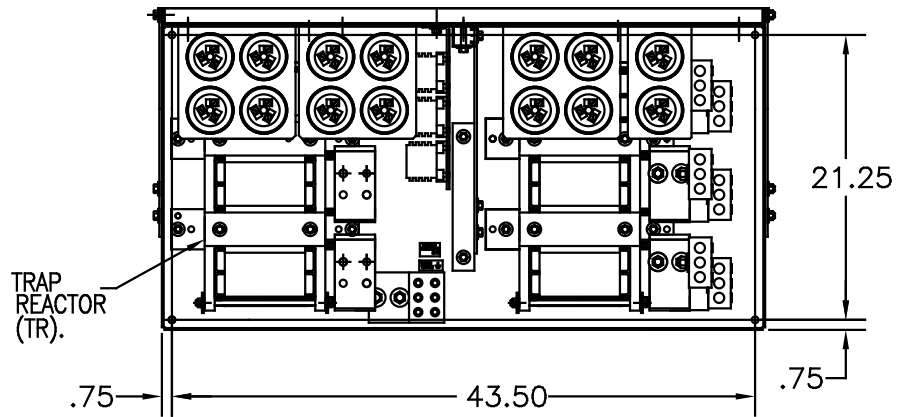

CUSTOMER CONNECTIONS:
 L1 L2 L3
 T1 T2 T3


SEE 25115 FOR SCHEMATIC

RB BLEED RESISTORS ON CAPACITOR TERMINALS

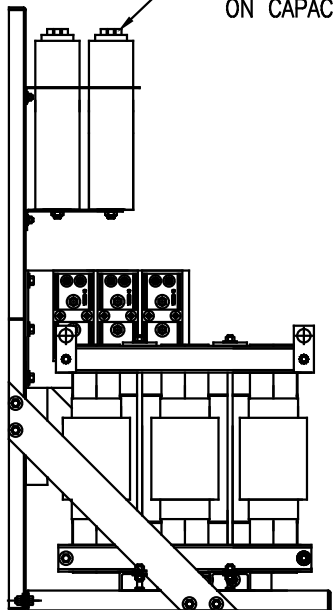


.50 DIA. HOLES 13 PLACES

TRAP FILTER FUSING Fu1, 2, 3

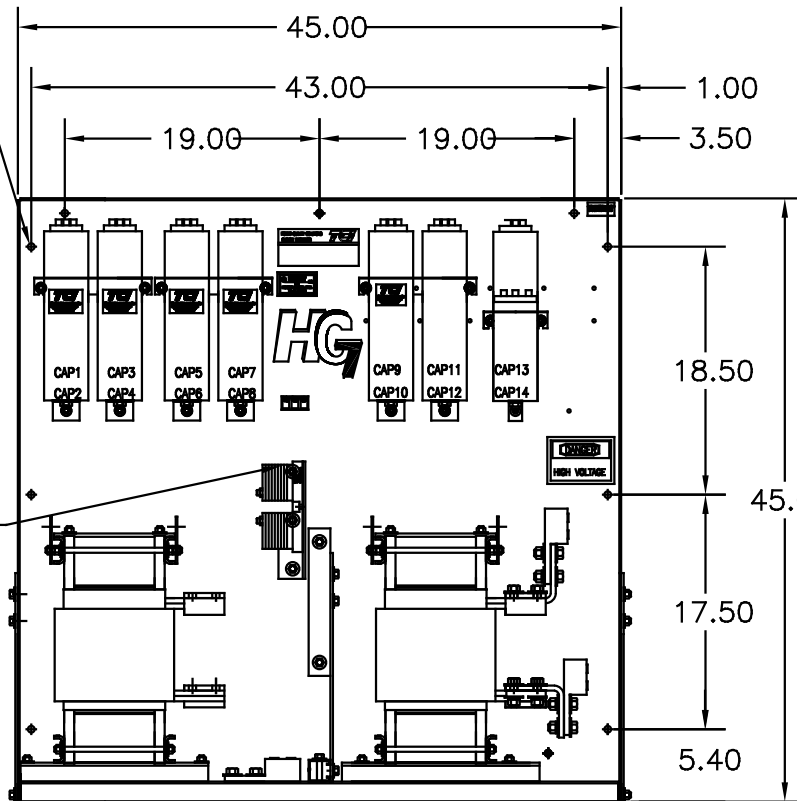

LINE REACTOR (LR).

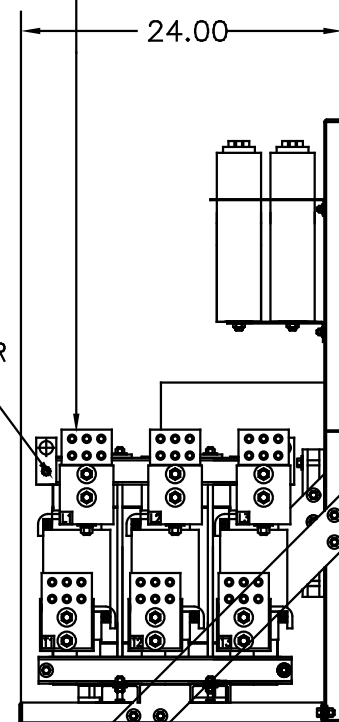

				TOLERANCES (UNLESS AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		HG900CW00ST HG7 STANDARD 900HP, 600/3/60 OPEN	
				.XX ±.03		DATE BY DATE	
				.XXX ±.01		DSW 05/24/05	
				FRACTIONAL		DWG. NO. 102706DG	
				± 1/32		C	
				ANGULAR		DWT. 1 OF 1	
				± 1/2"			
NO.	REVISION	DATE	BY	SCALE TO FIT	APPROV.		