
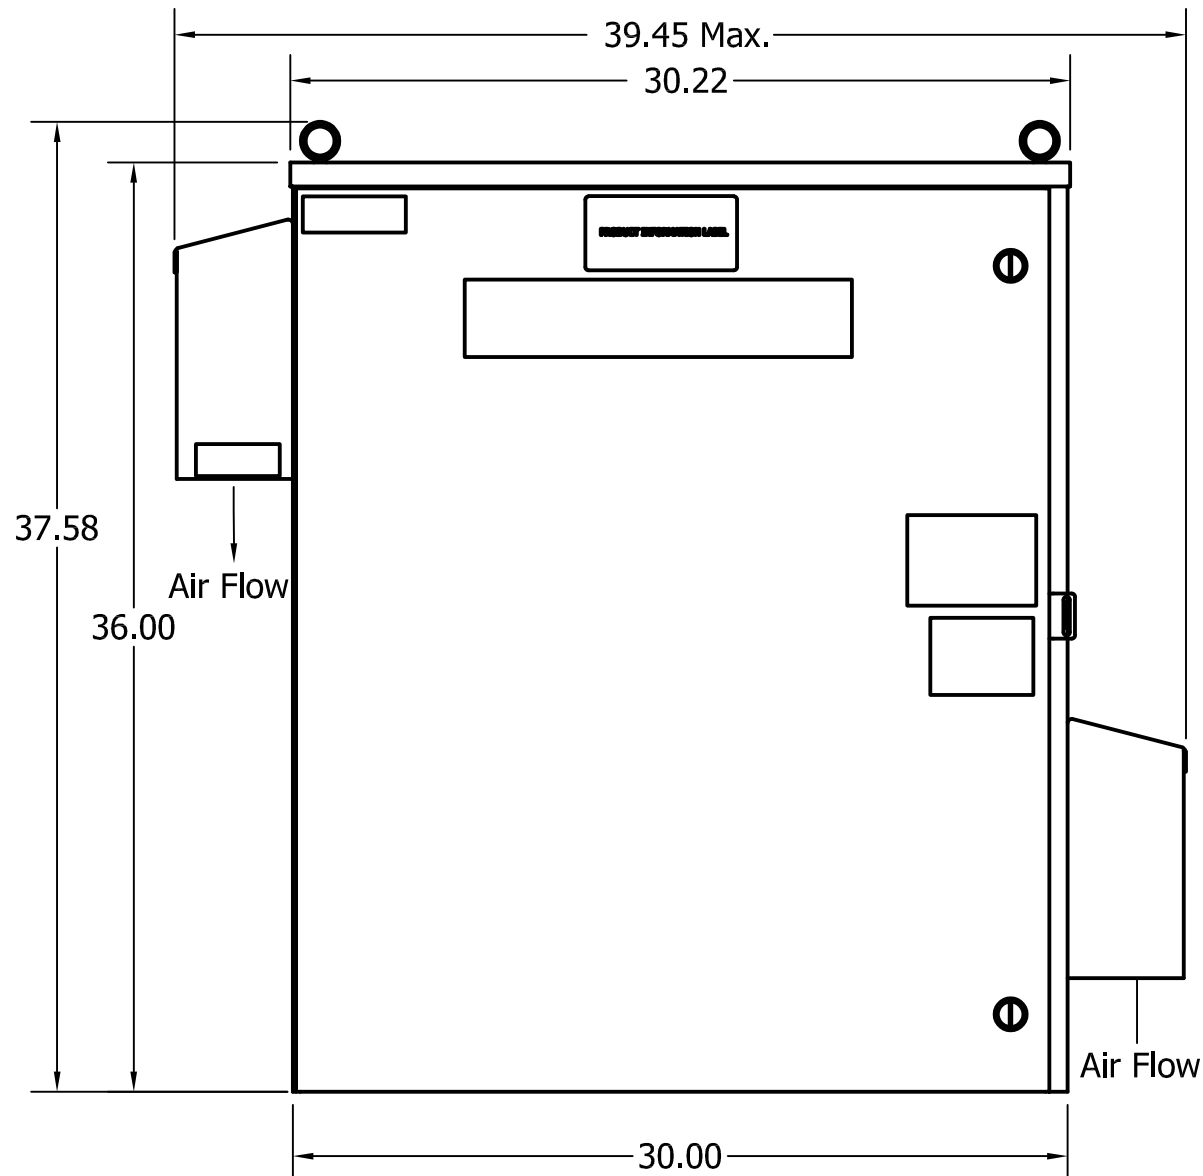




Alternate Rain Hood Construction.

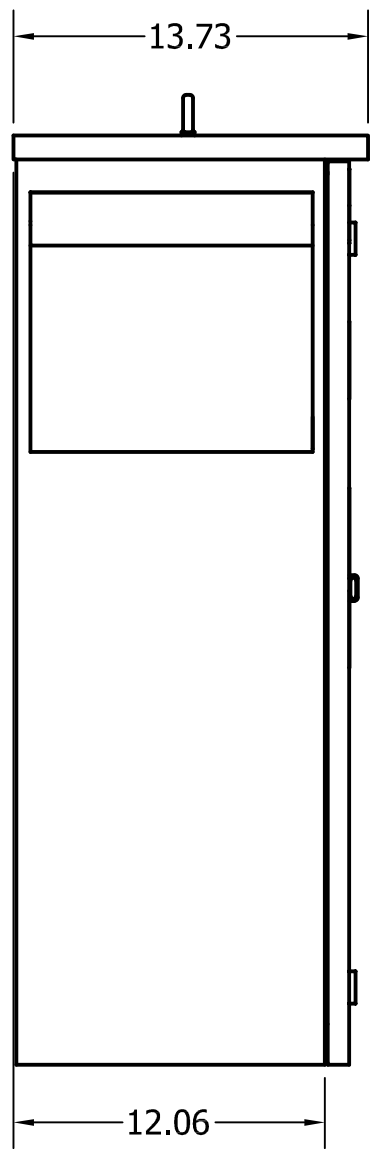


Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
5	5TH	600	60	3	30

TCI Part Number	Option	Weight	Schematic
HGL00300W3S0000	Standard	205lbs	30807-1
HGL0030CW3C0000	Contactors	215lbs	30807


See IOM Manual For Wire Range And Tightening Torque.

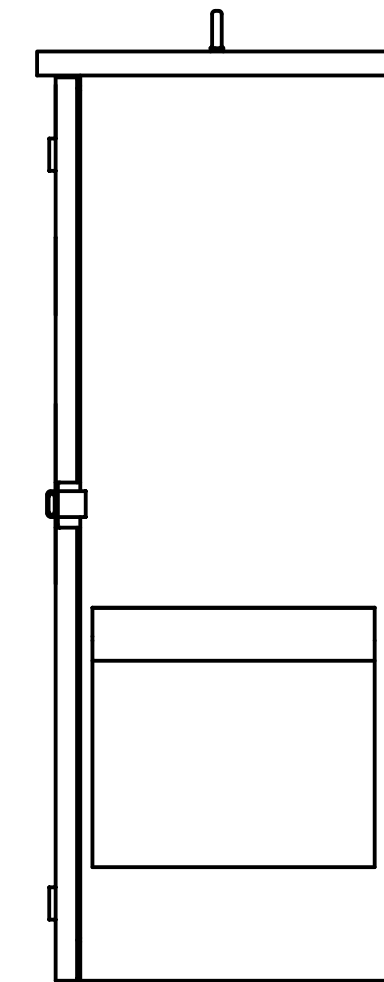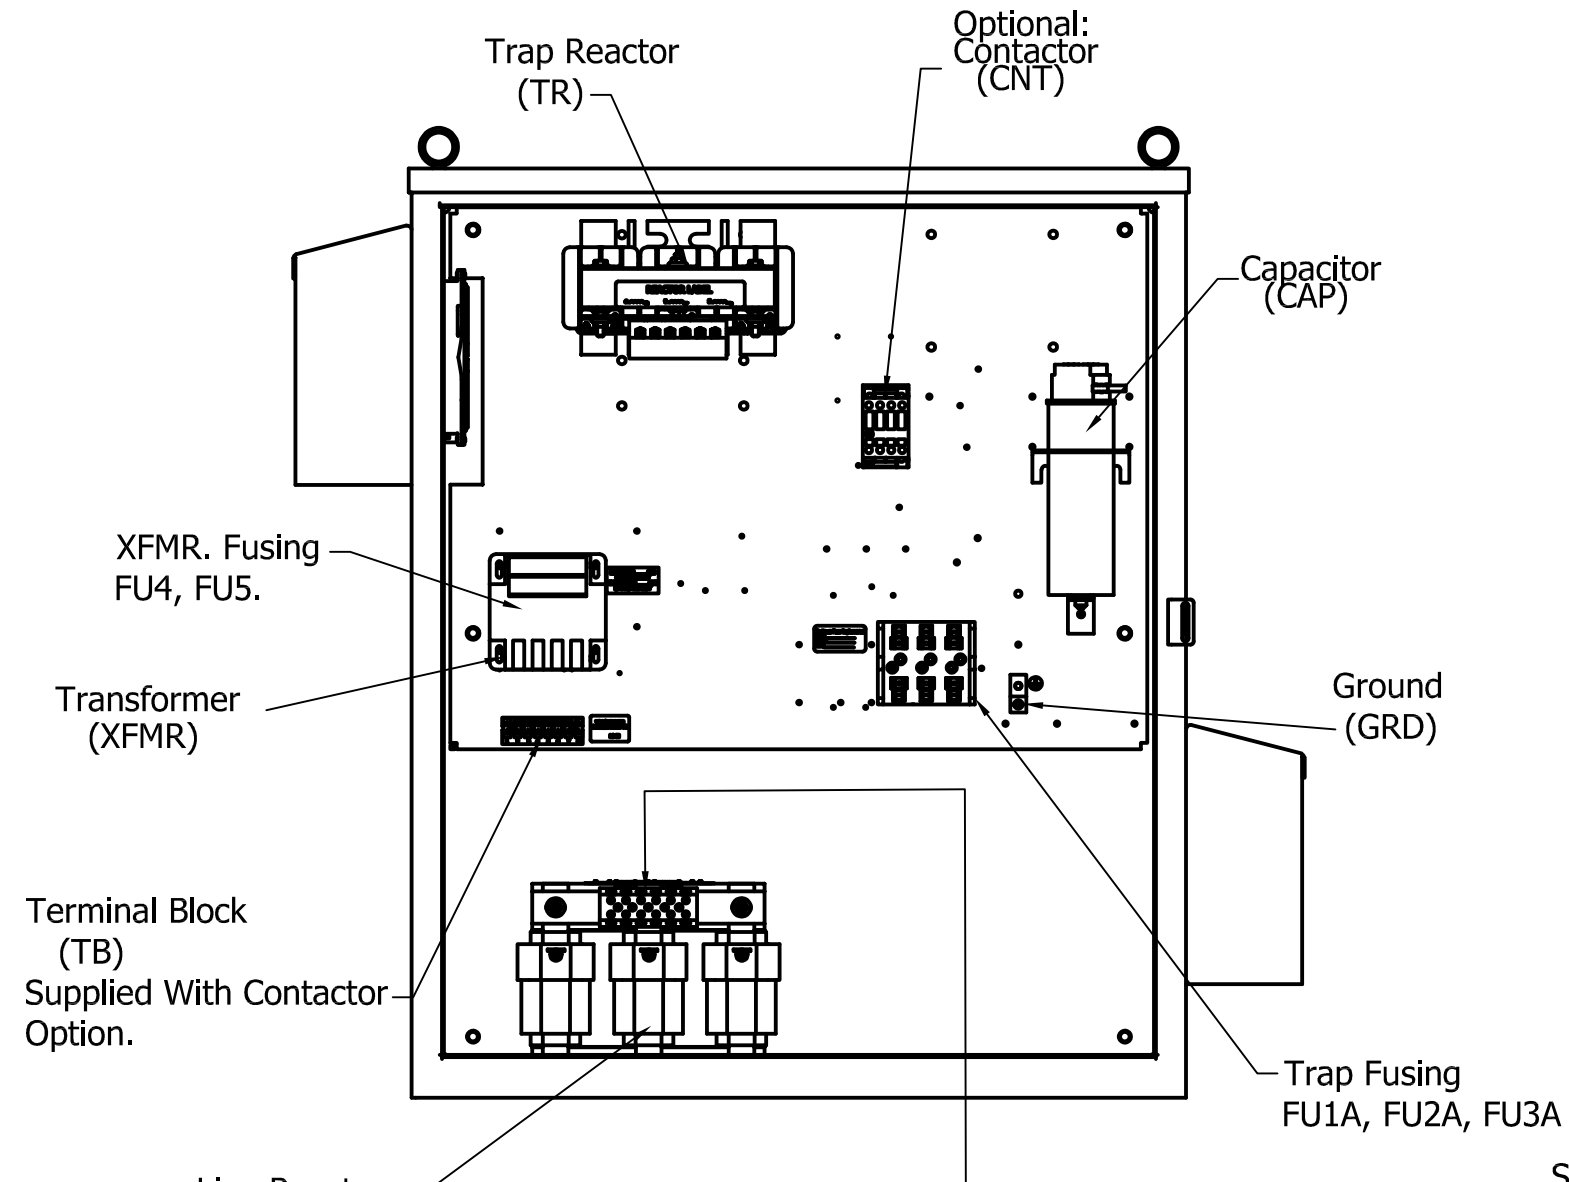


Suggested Customer Enclosure Entry.

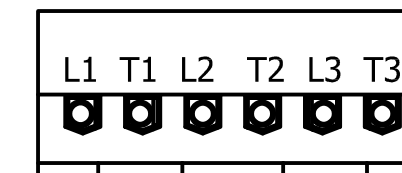

Customer Connection L1 T1 L2 T2 L3 T3

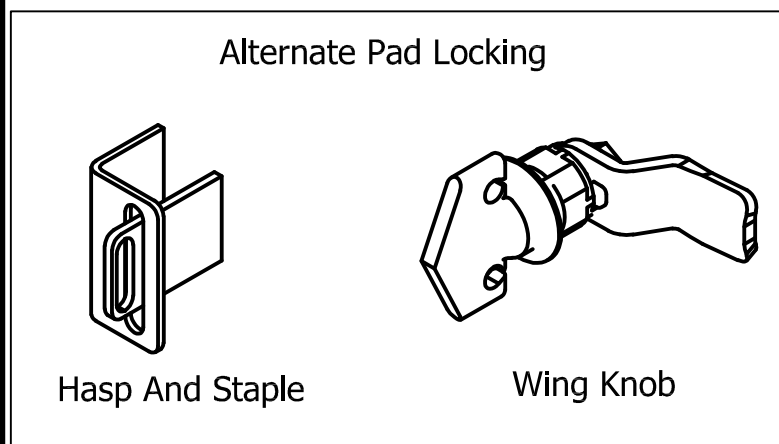

0.44 Dia Holes 4 Places.

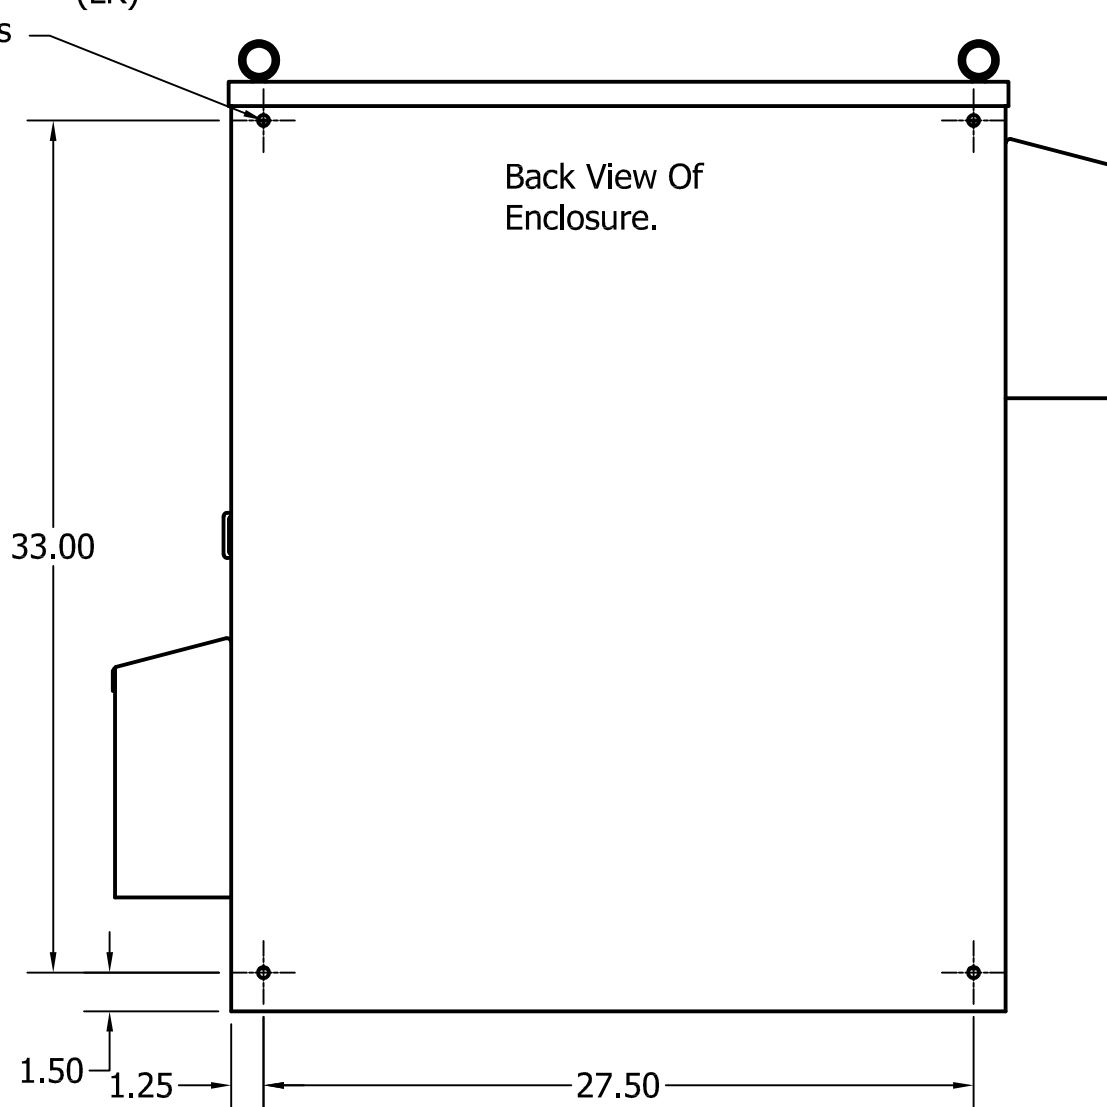

Back View Of Enclosure.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL	W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022
				.XX +/- .25	
					.XXX +/- .12
					FRACTIONAL +/- 1/16
	A	AS DESIGNED	10/4/17	DSW	HGL0030CW3C0000, 600V, 30HP, 3 Phase HGL0030CW3S0000, 600V, 30HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter
	NO	REVISION	DATE	BY	DRN. BY DSW SCALE 1/8 DATE 10/4/17 APRVD.
				ANGULAR +/- 1 °	DWG. No. 107303DG SHEET 1 OF 1