
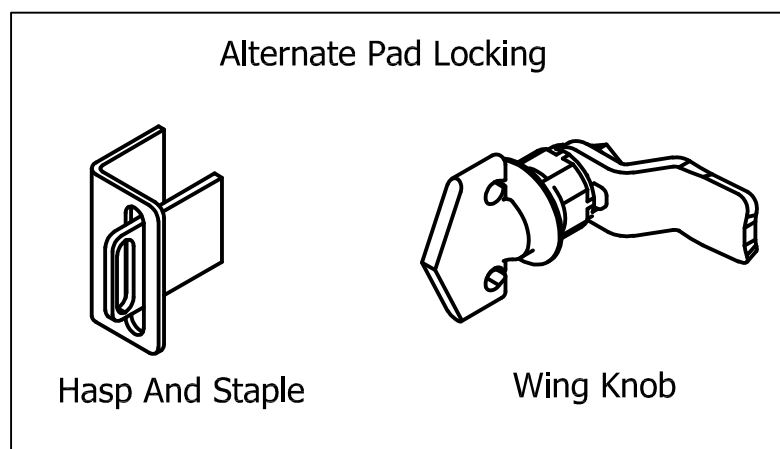
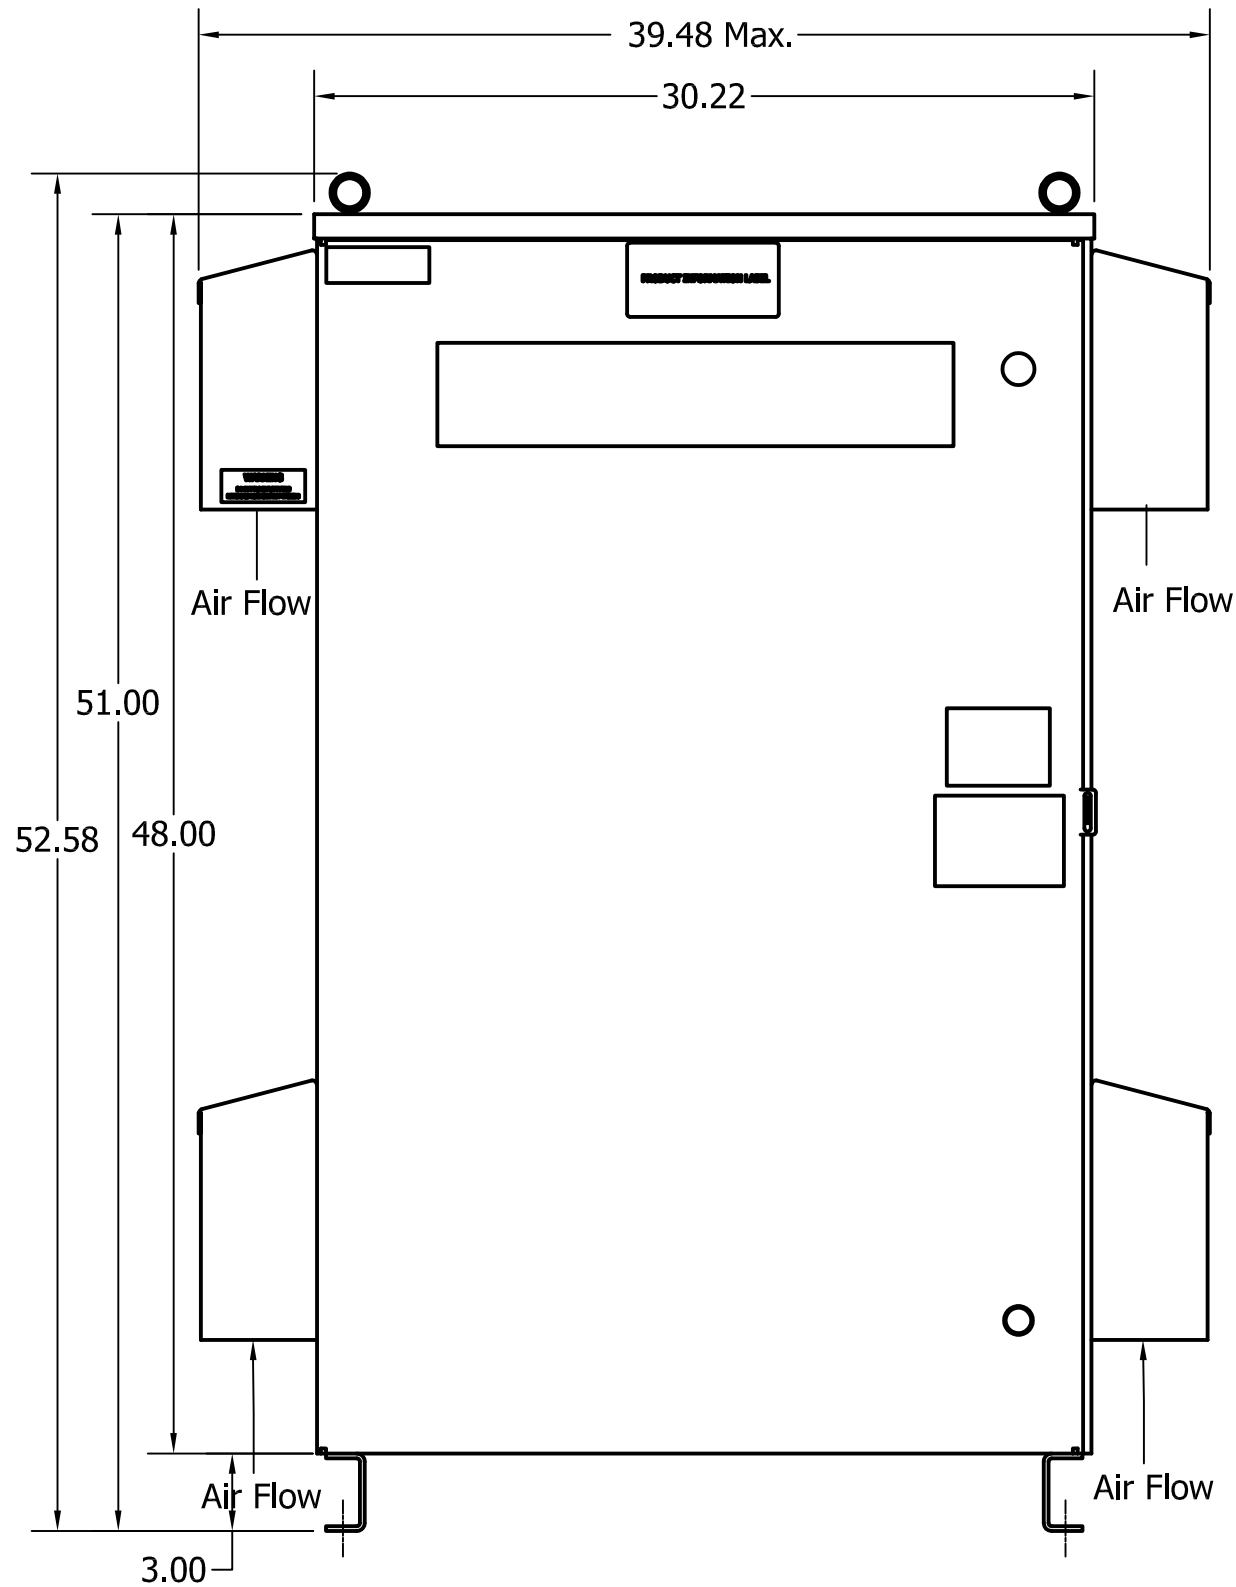



Alternate Rain Hood Construction.

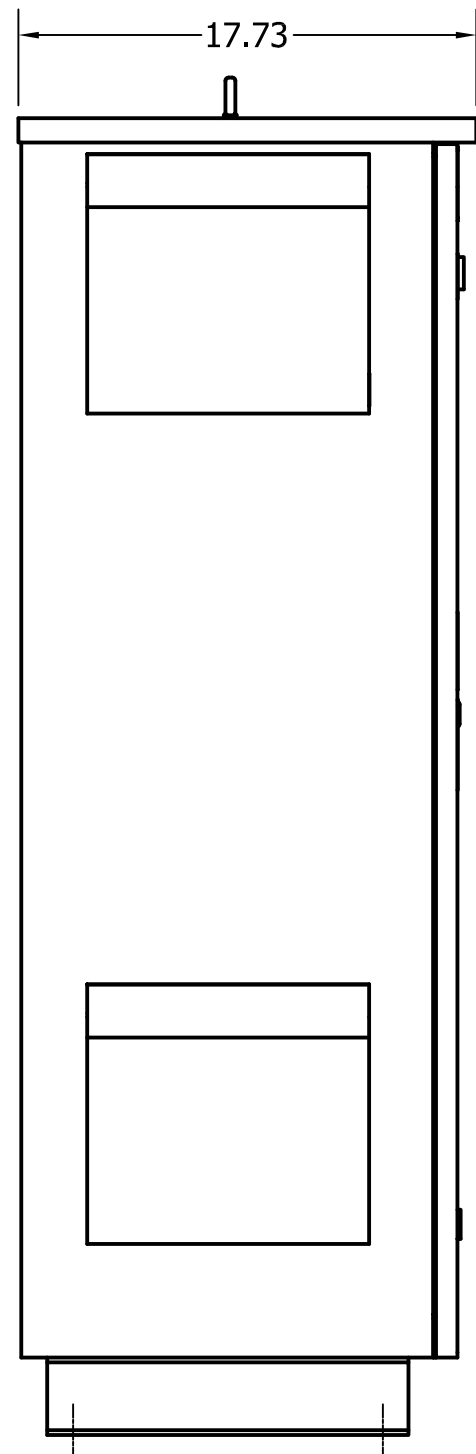


Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
25	5TH	480	60	3	150

TCI Part Number	Option	Weight	Schematic
HGL0150AW3S0000	Standard	400lbs	30586-1
HGL0150AW3C0000	Contactors	405lbs	30586

See IOM Manual For Wire Range And Tightening Torque.

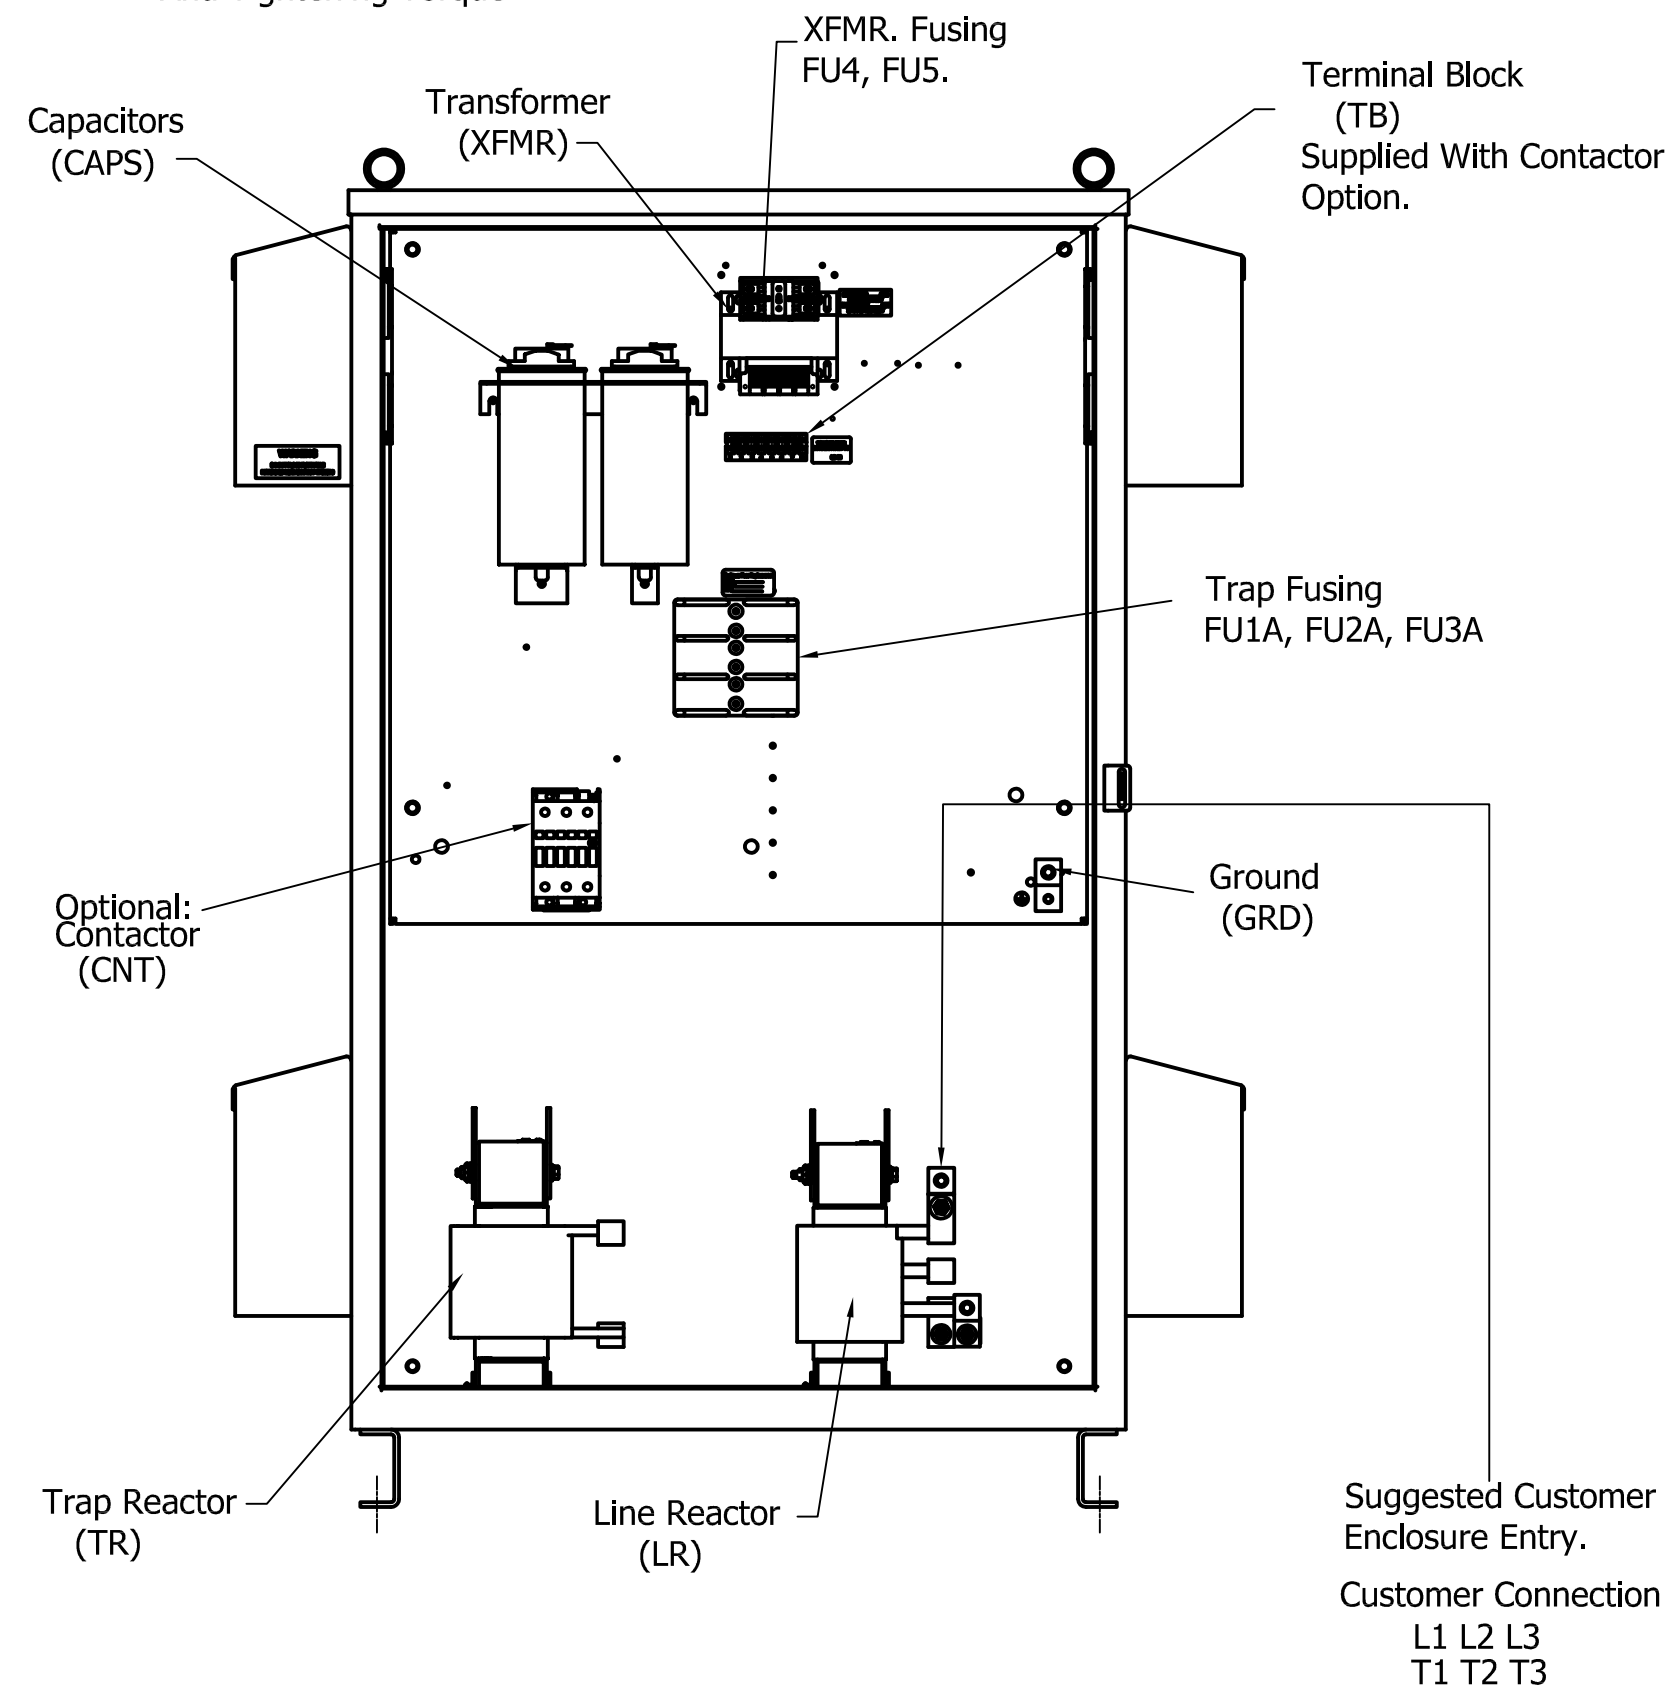

Suggested Customer Enclosure Entry.
Customer Connection
L1 L2 L3
T1 T2 T3

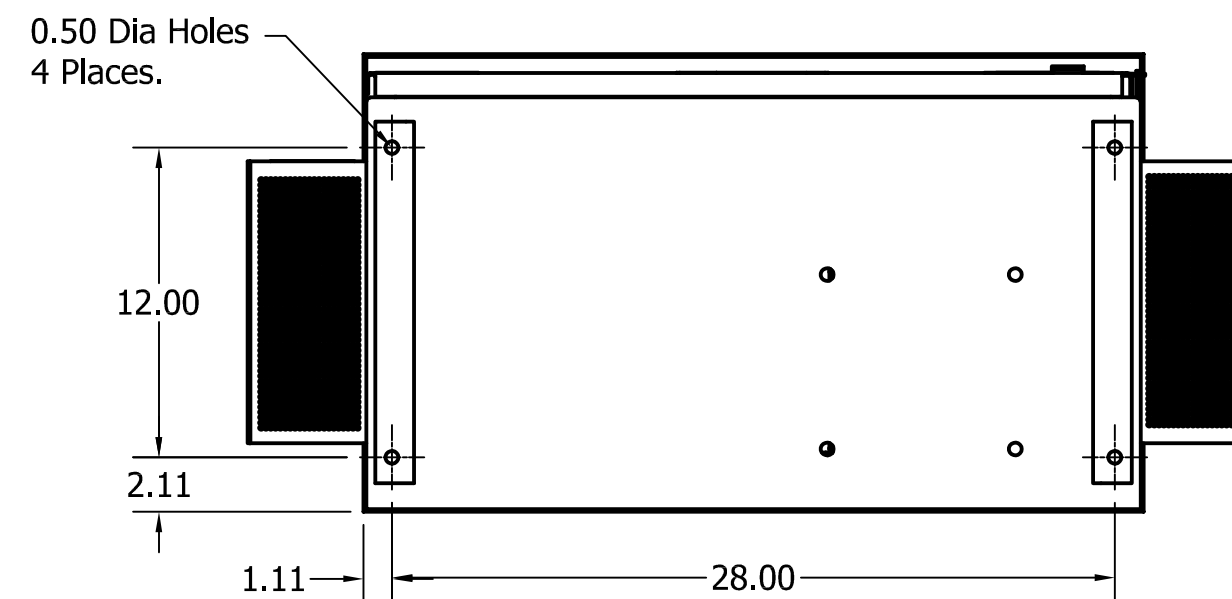

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES
Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)
				DECIMAL
				.XX +/- .25
				.XXX +/- .12
				FRACTIONAL
				+/- 1/16
A	AS DESIGNED	5/31/17	DSW	ANGULAR
				+/- 1 °

TCI® W132 N10611 Grant Drive
Germantown, WI 53022

HGL0150AW3C0000, 480V, 150HP, 3 Phase
HGL0150AW3S0000, 480V, 150HP, 3 Phase
60 Hz, Type 3R, Low C, Passive Harmonic Filter

DRN. BY: DSW DATE: 5/31/17 DWG. No.: 107034DG
SCALE: 1/8 APRVD.

SHEET 1 OF 1