






Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
25	5TH	600	60	3	150

Note: For Torque Information
See IOM Manual

Customer Connections.
L1, L2, L3, T1, T2, T3
Wire Range: 250MCM to 6AWG.

Ground Lug
Wire Range: 250MCM to 6AWG.

HGL Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0150CW3S0000	30807-S	400
HGL0150CW3C0000	30807-C	405
HGL0150CW3S1000	30807-PQ1	403
HGL0150CW3C1000	30807-PQ	408

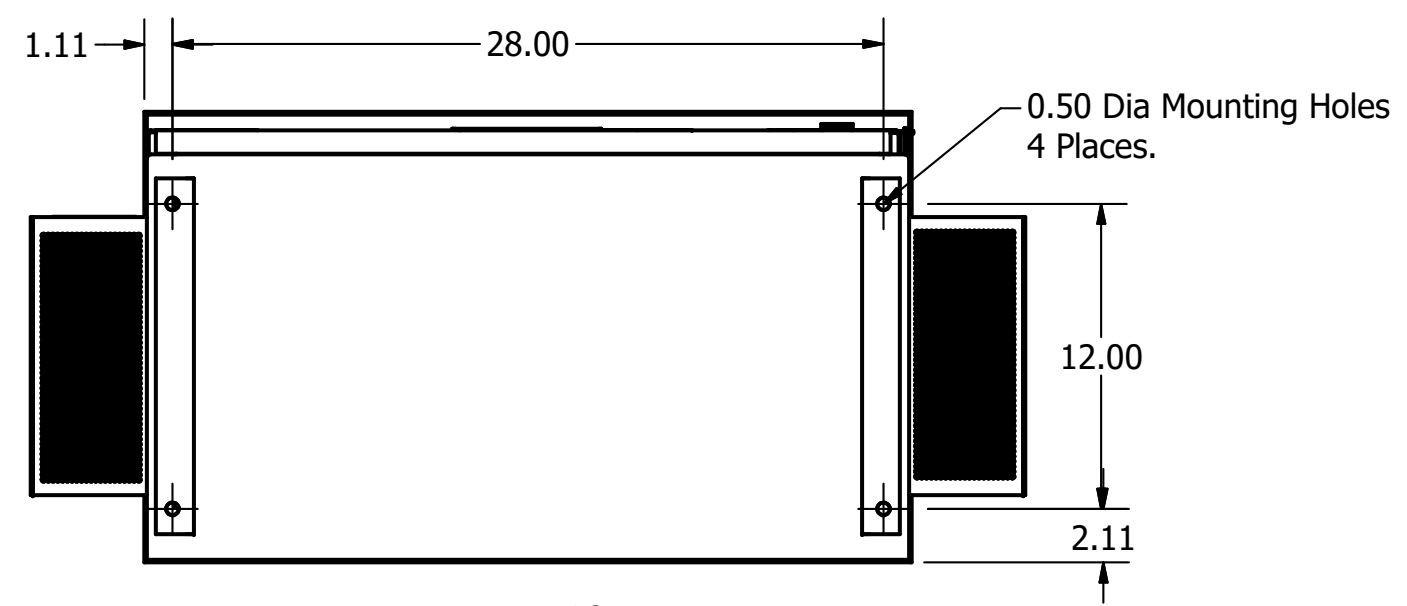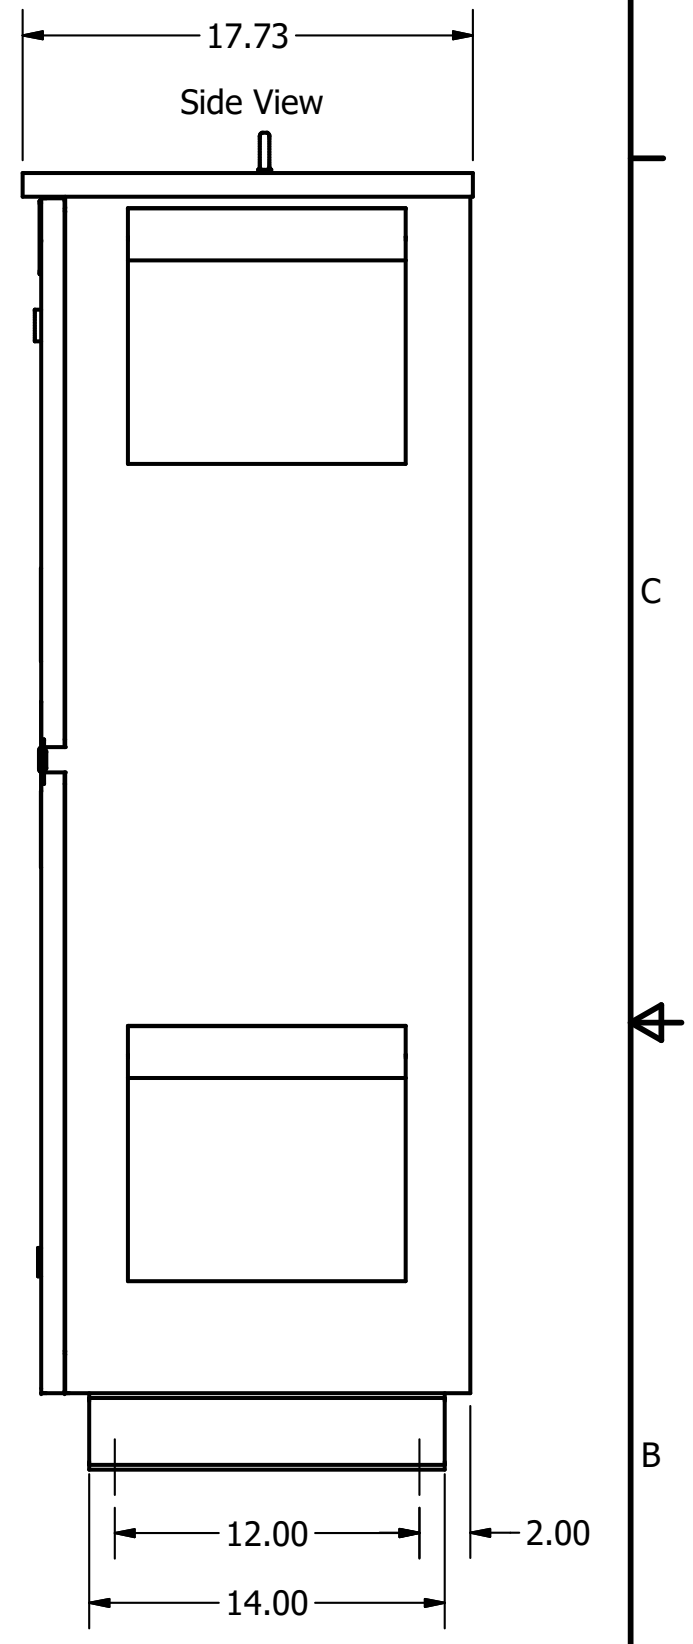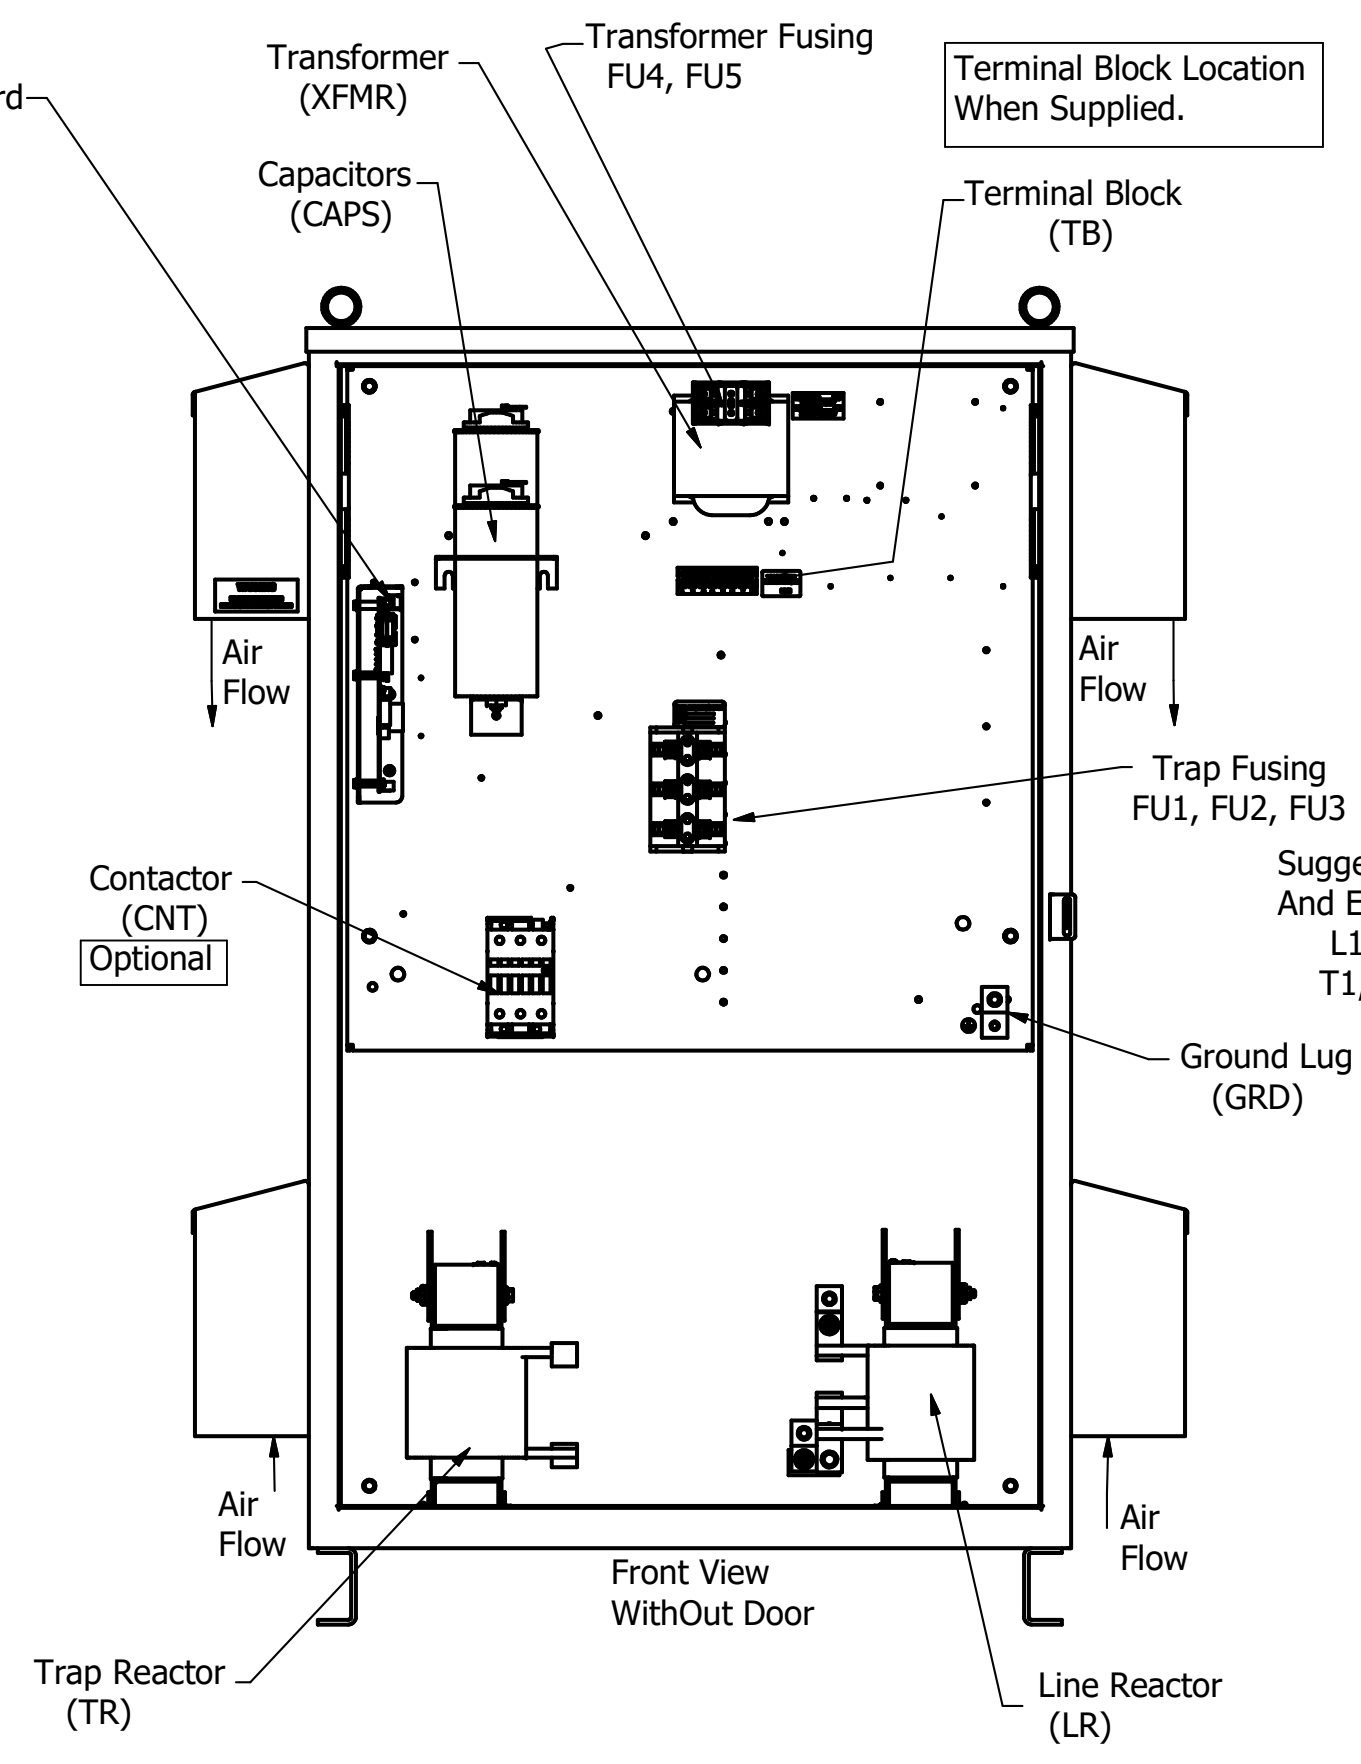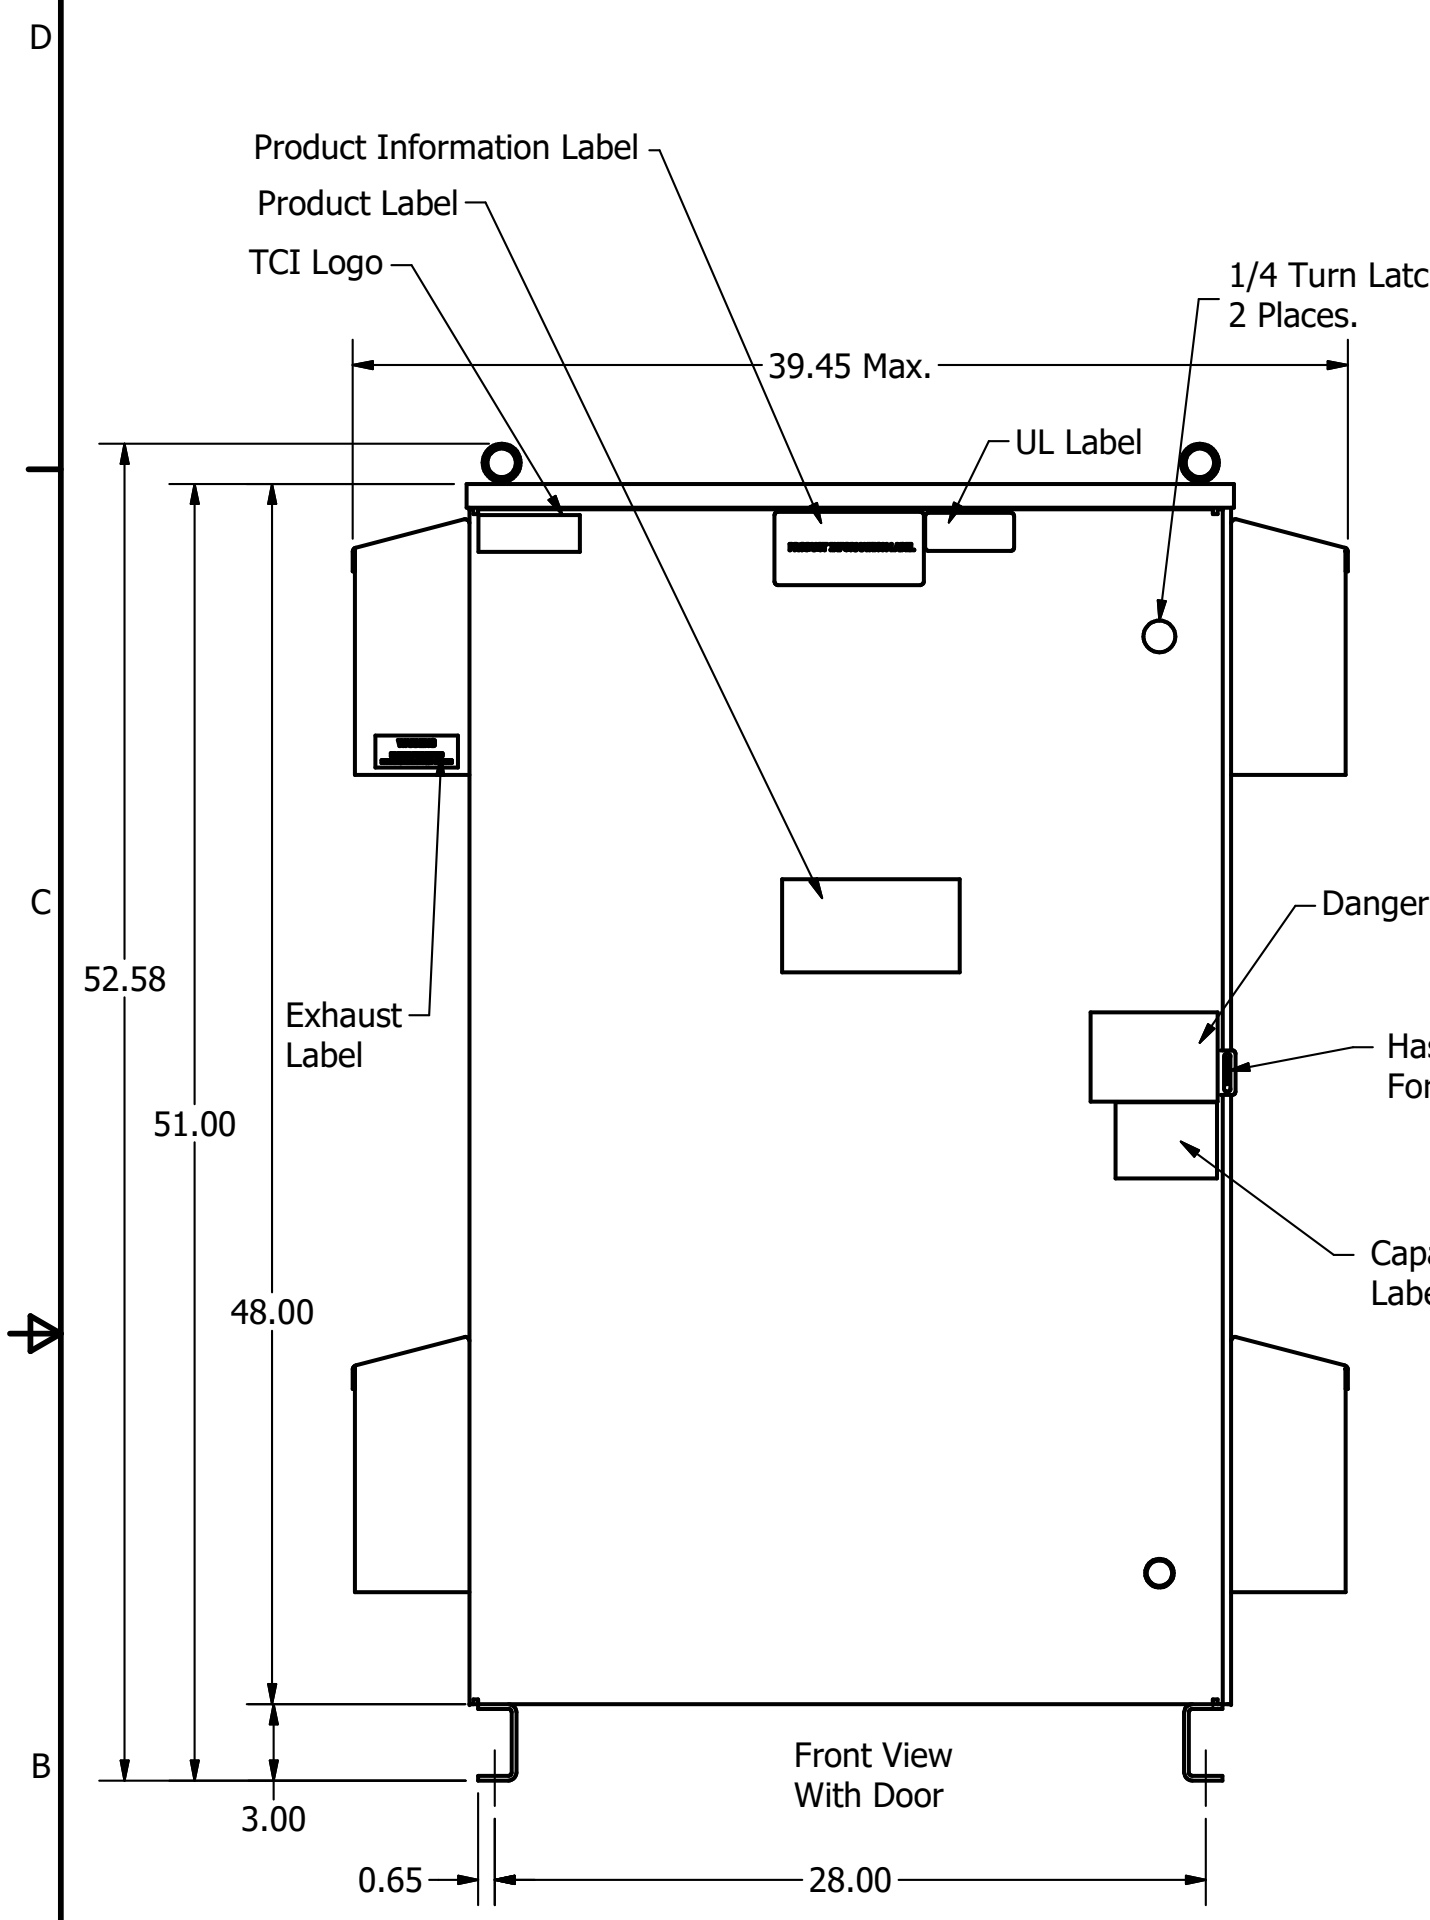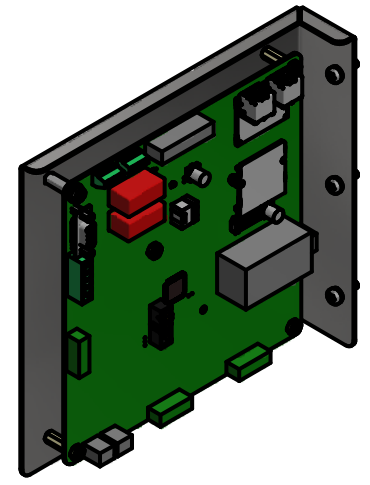

Components	HGL0150CW3-----			
	S0000	C0000	S1000	C1000
Line Reactor (LR)	x	x	X	X
Trap Reactor (TR)	x	x	X	X
Capacitor (Cap)	x	x	X	X
Trap Fusing, FU1, FU2, FU3	x	x	X	X
Contactor (CNT)		x		X
Transformer (XFMR)	x	x	X	X
XFMR Fusing, FU4, FU5	x	x	X	X
PQConnect Board			X	X

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022 HarmonicGuard Low Capacitance HGL, 150HP, 600/3/60, Type 3R
					DECIMAL	
					.XX ± .25 .XXX ± .10	
					FRACTIONAL ± 1/16	
	B Add PQConnect	3/14/19	DSW		ANGULAR ± 1°	DRN BY: DSW DATE: 10/4/17 SCALE: 1/8 APRVD: 107310DG NO. REVISION DATE BY SIZE SHT 1 OF 1