

HGL Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0200AW3S0000	30586-1	470
HGL0200AW3C0000	30586	475
HGL0200AW3S*000	30586-PQ1	473
HGL0200AW3C*000	30586-PQ	478


* = Communication Option

Unit Specifications						
kVar	Harmonic	Volt	Maximum Amps (A)	HZ.	Phase	HP
30	5TH	480	240	60	3	200

Note: For Torque Information
See IOM Manual

Customer Connections.
L1, L2, L3, T1, T2, T3
Wire Range: Two, 350MCM to 2AWG.

Ground Lug
Wire Range: Two, 350MCM to 2AWG.

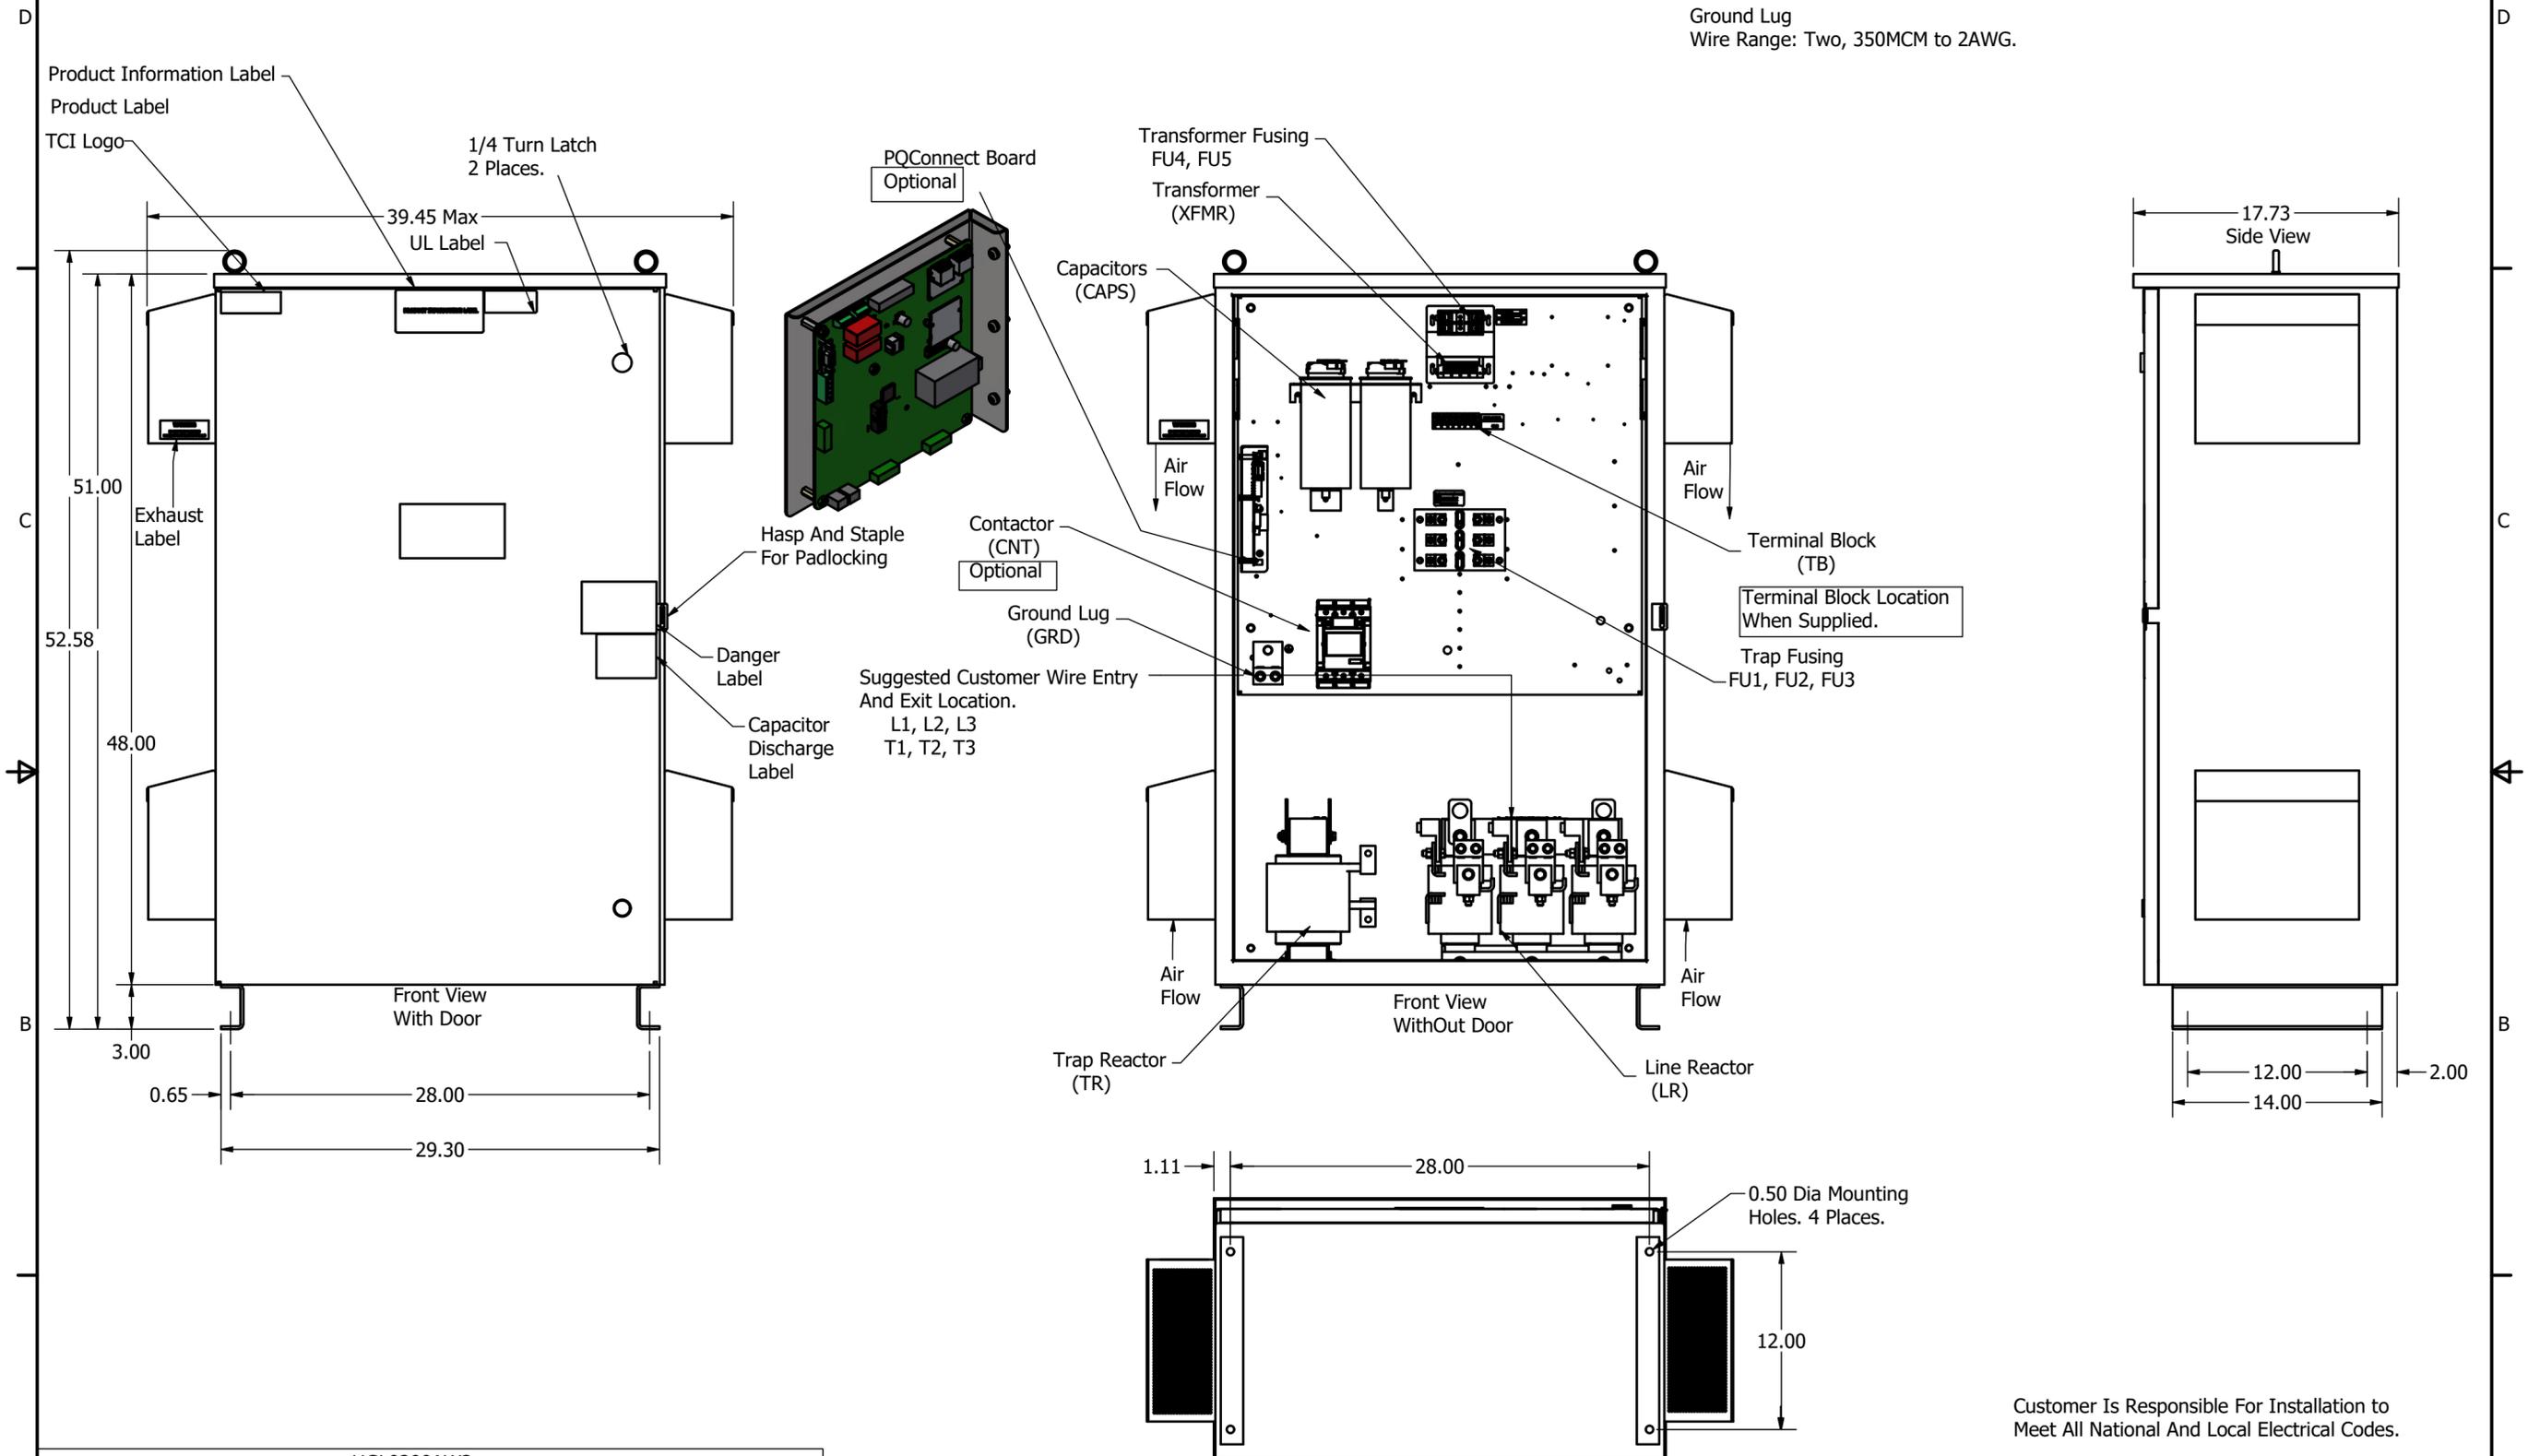

HGL0200AW3-----				
Components	S0000	C0000	S*000	C*000
Line Reactor (LR)	x	x	X	X
Trap Reactor (TR)	x	x	X	X
Capacitor (Cap)	x	x	X	X
Trap Fusing, FU1, FU2, FU3	x	x	X	X
Contactor (CNT)		x		X
Transformer (XFMR)	x	x	X	X
XFMR Fusing, FU4, FU5	x	x	X	X
PQConnect Board			X	X

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.	DRN	6024, Add PQ Option	8/30/22	JTL	TOLERANCES (EXCEPT AS NOTED)	 W132N10611 Grant Drive Gemantown, WI 53022 © 2022 TCI, LLC HarmonicGuard Low Capacitance HGL, 200HP, 480/3/60, Type 3R 107035DG
	C	5653, GE to ABB CNT change	3/10/2022	DSW	DECIMAL	
	B	Add PQConnect	2/14/19	DSW	FRACTIONAL	
	NO	REVISION	DATE	BY	ANGULAR	