

Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
60	5TH	600	60	3	400


TCI Part Number	Option	Weight	Schematic
HGL0400CW3S0000	Standard	875lbs	30807-S
HGL0400CW3C0000	Contactor	880lbs	30807-C

See IOM Manual For Wire Range  
And Tightening Torque.


Customer Connection

L1 L2 L3  
T1 T2 T3  
Suggested Customer  
Enclosure Entry.

Optional:  
Contactor  
(CNT)

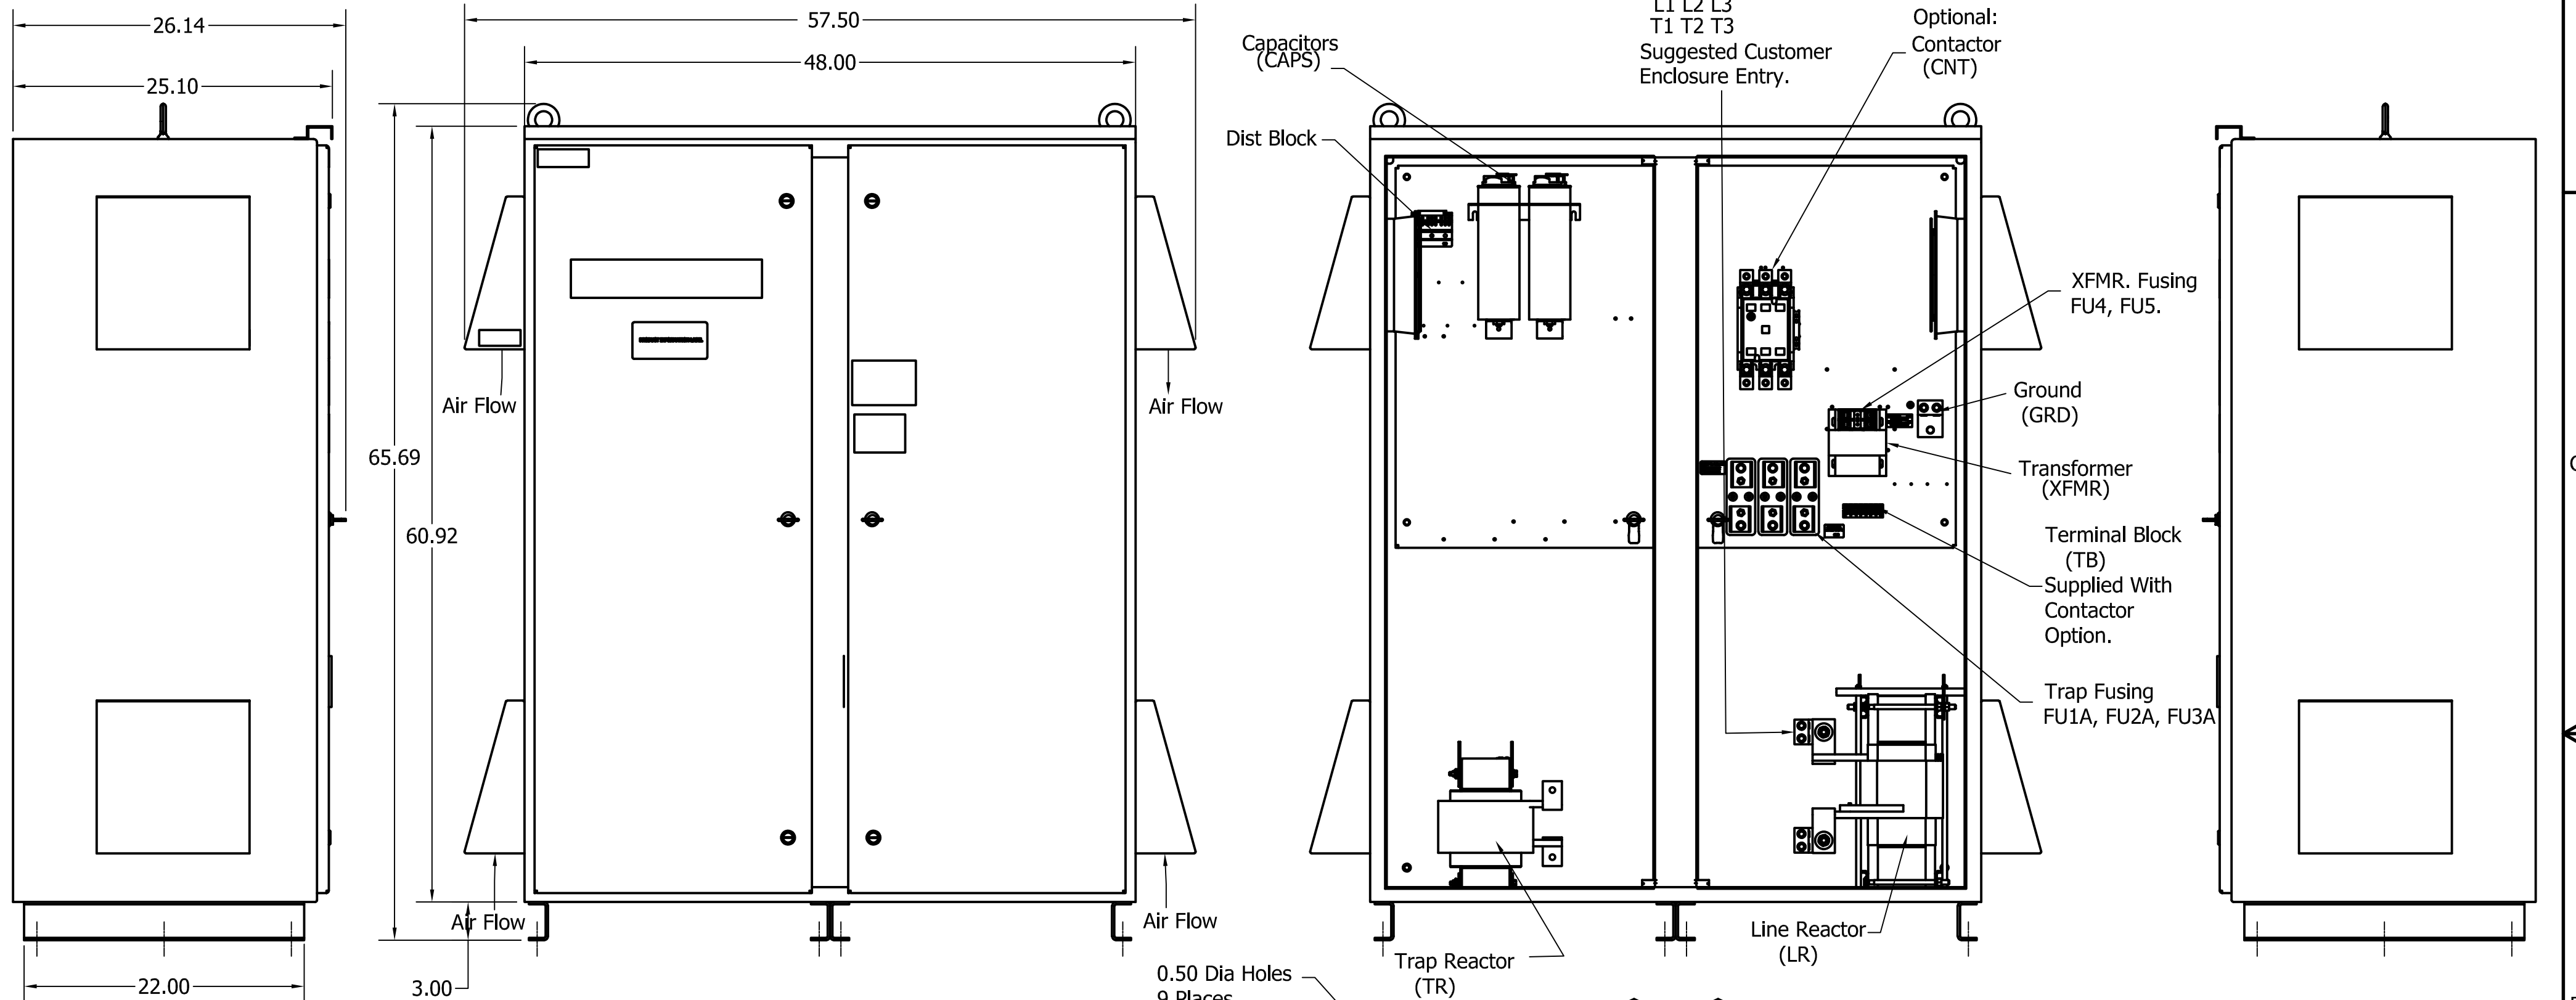

0.50 Dia Holes  
9 Places.

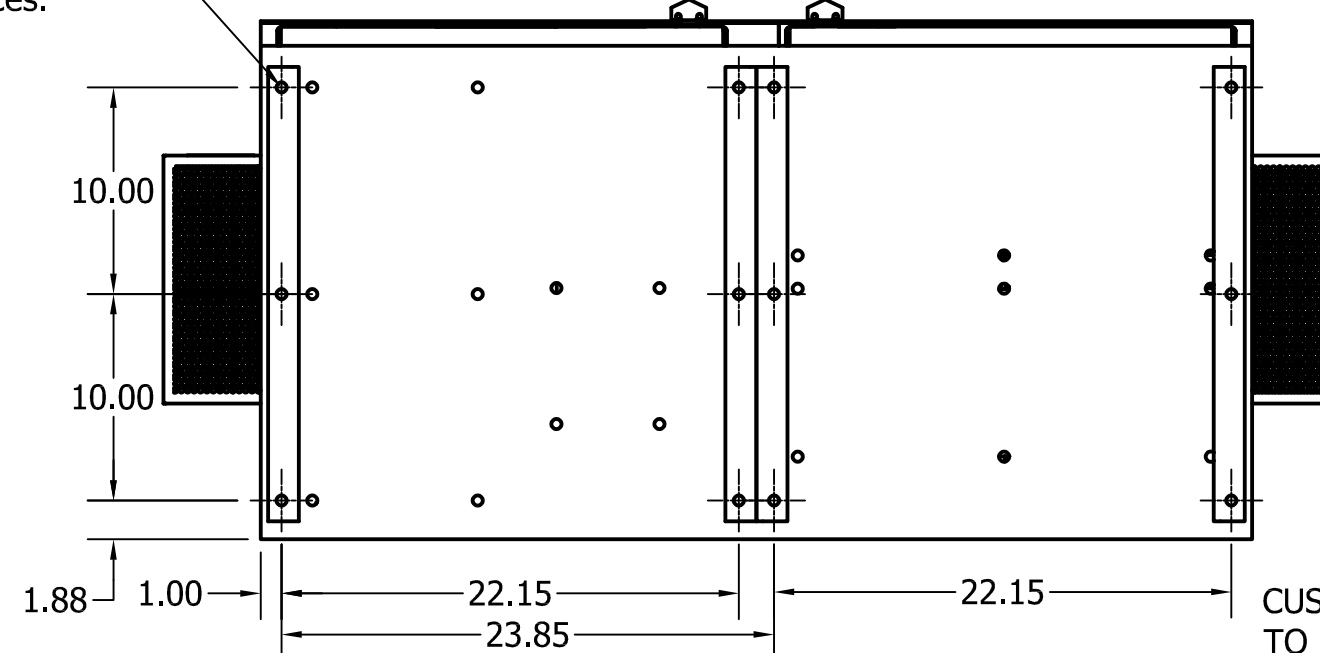

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELETRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES  
Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY
A	AS DESIGNED	10/9/17	DSW

		W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022
HGL0400CW3C0000, 600V, 400HP, 3 Phase HGL0400CW3S0000, 600V, 400HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter		DRN. BY <b>DSW</b>
DATE 10/9/17		DWG. No. <b>107315DG</b>
SCALE 1/8"		SHEET 1 OF 1

4

3

2

1

4

3

2

1