

Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
70	5TH	600	60	3	450





TCI Part Number	Option	Weight	Schematic
HGL0450CW3S0000	Standard	880lbs	30807-S
HGL0450CW3C0000	Contactor	885lbs	30807-C

See IOM Manual For Wire Range And Tightening Torque.

Customer Connection  
L1 L2 L3  
T1 T2 T3

Optional:  
Contactor  
(CNT)

Suggested Customer  
Enclosure Entry.

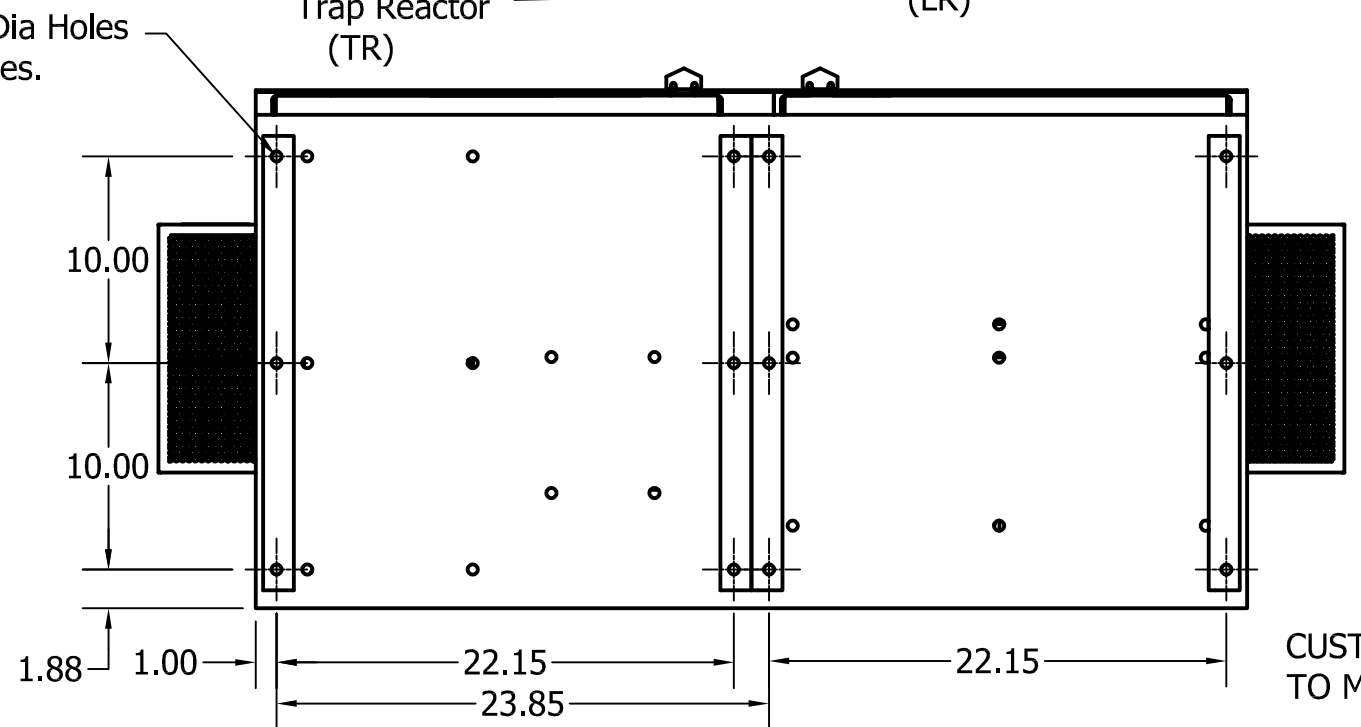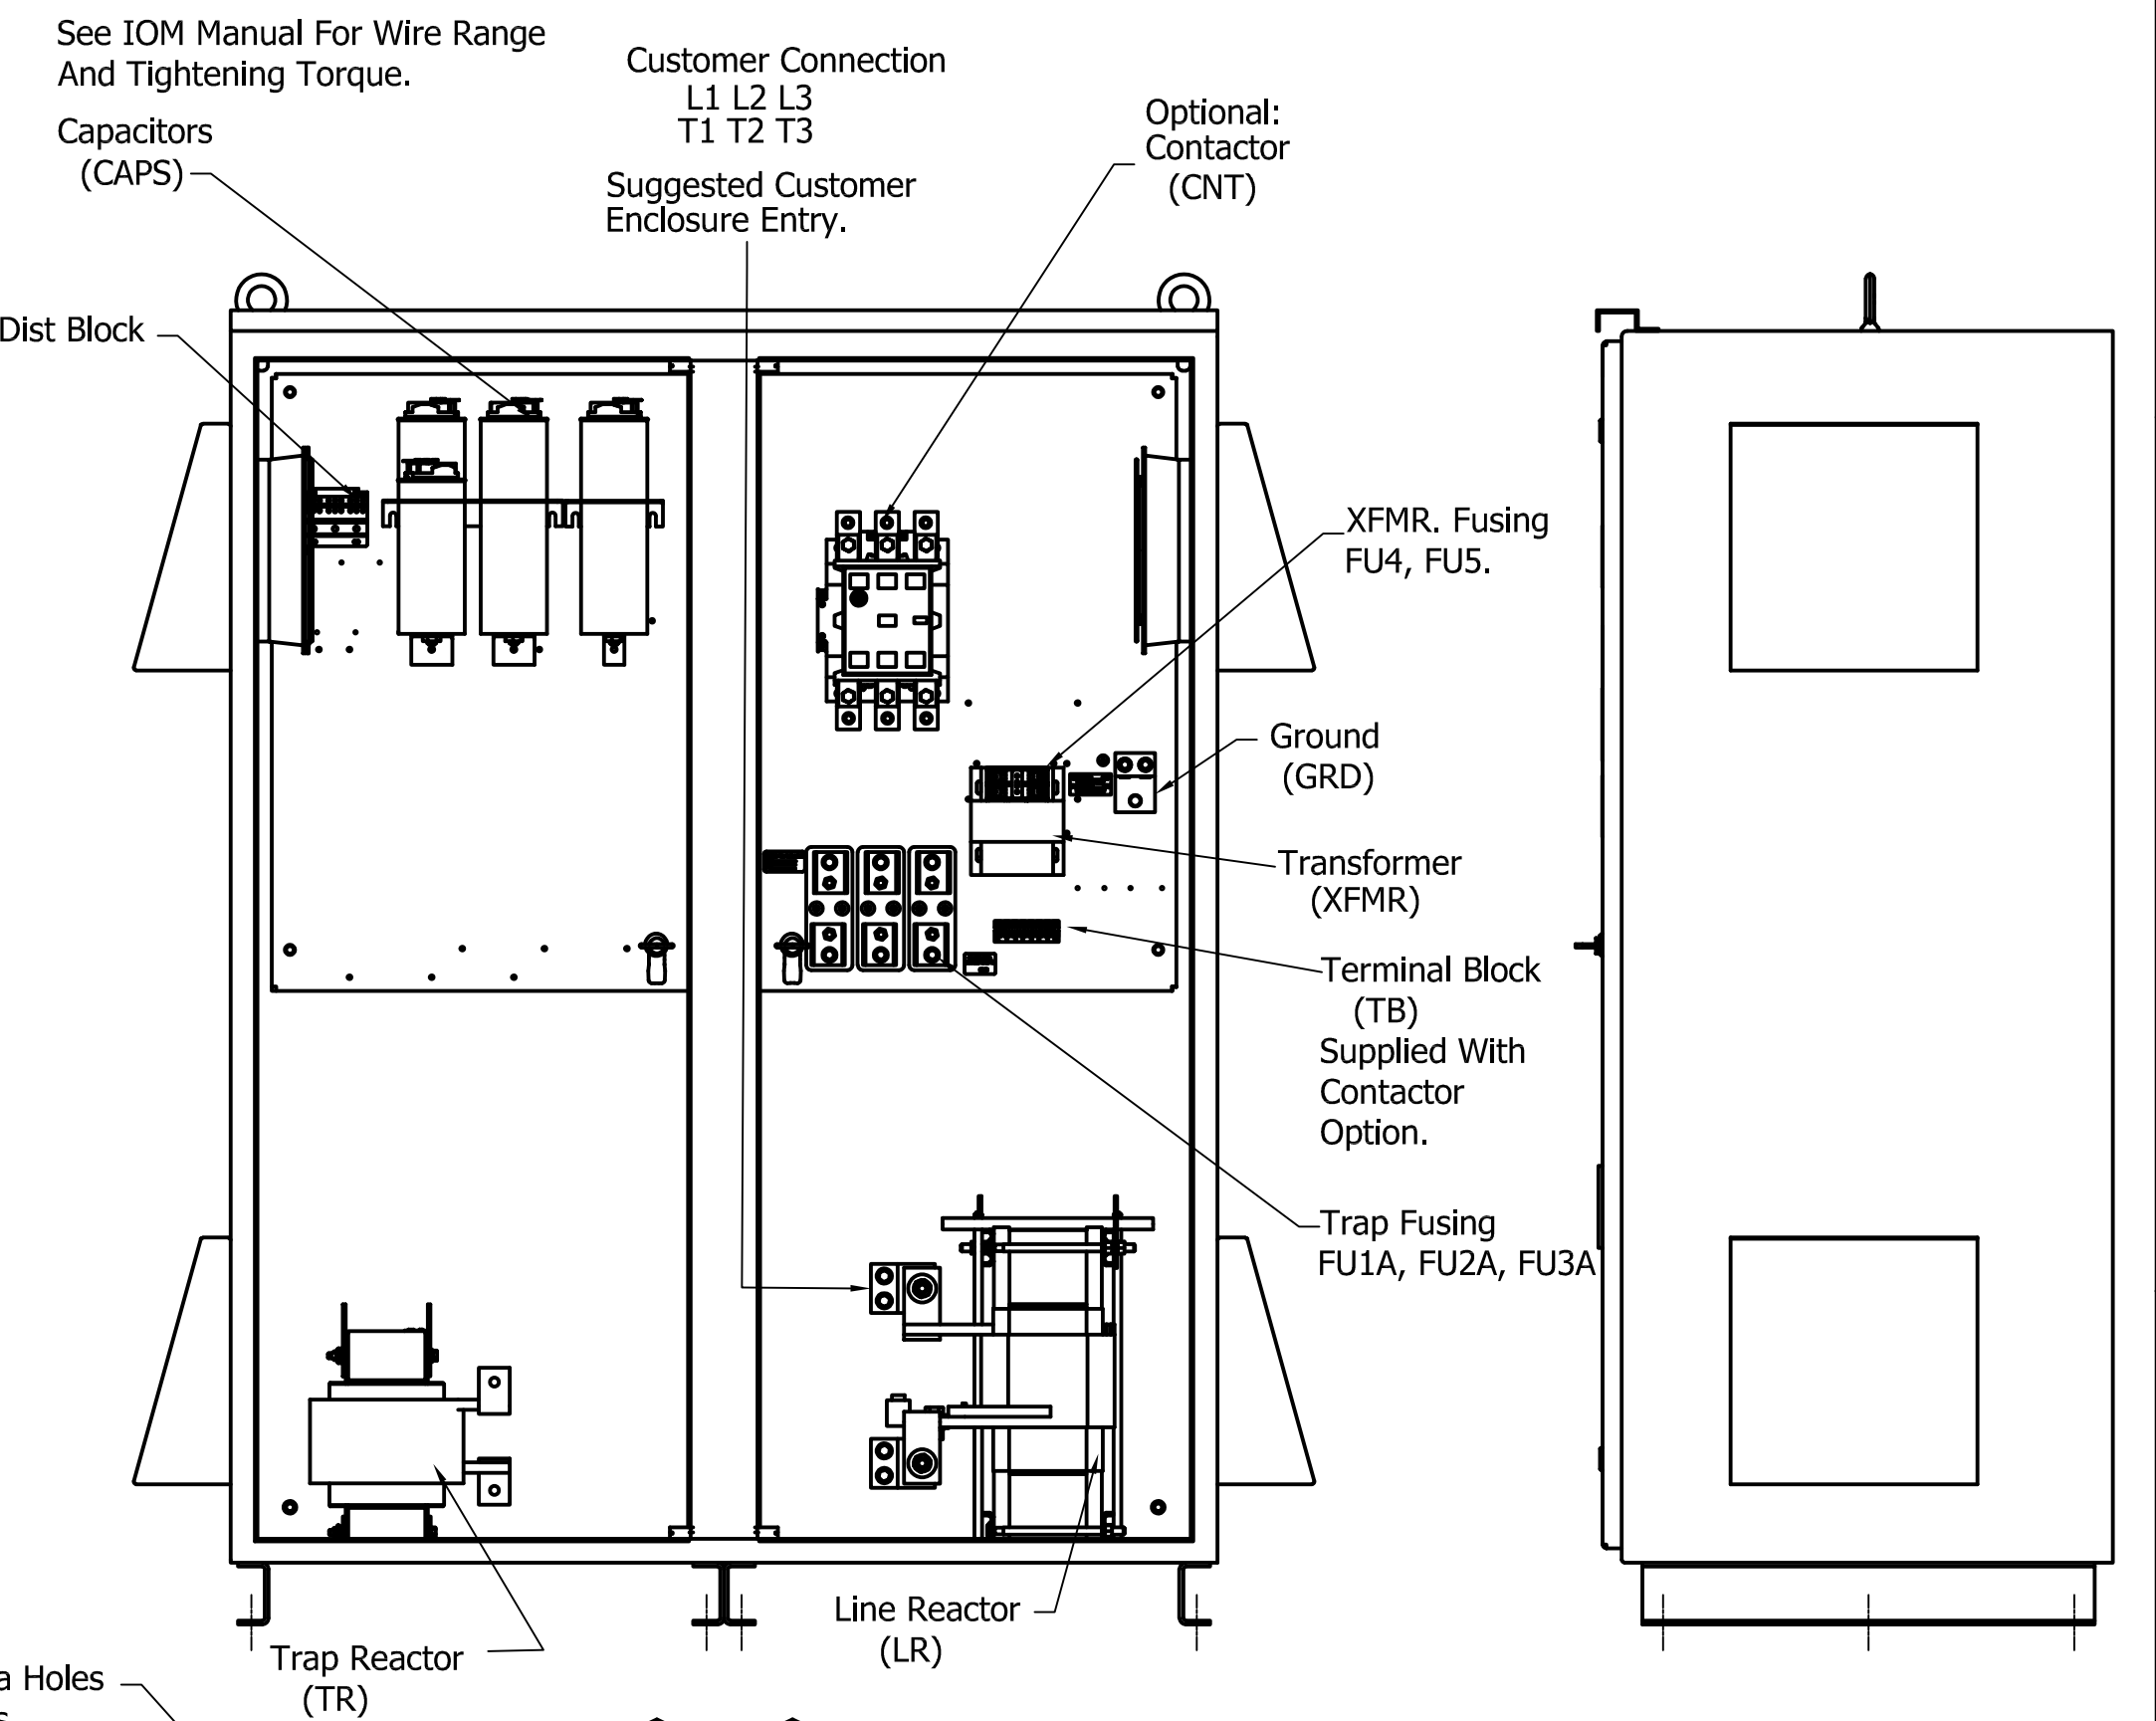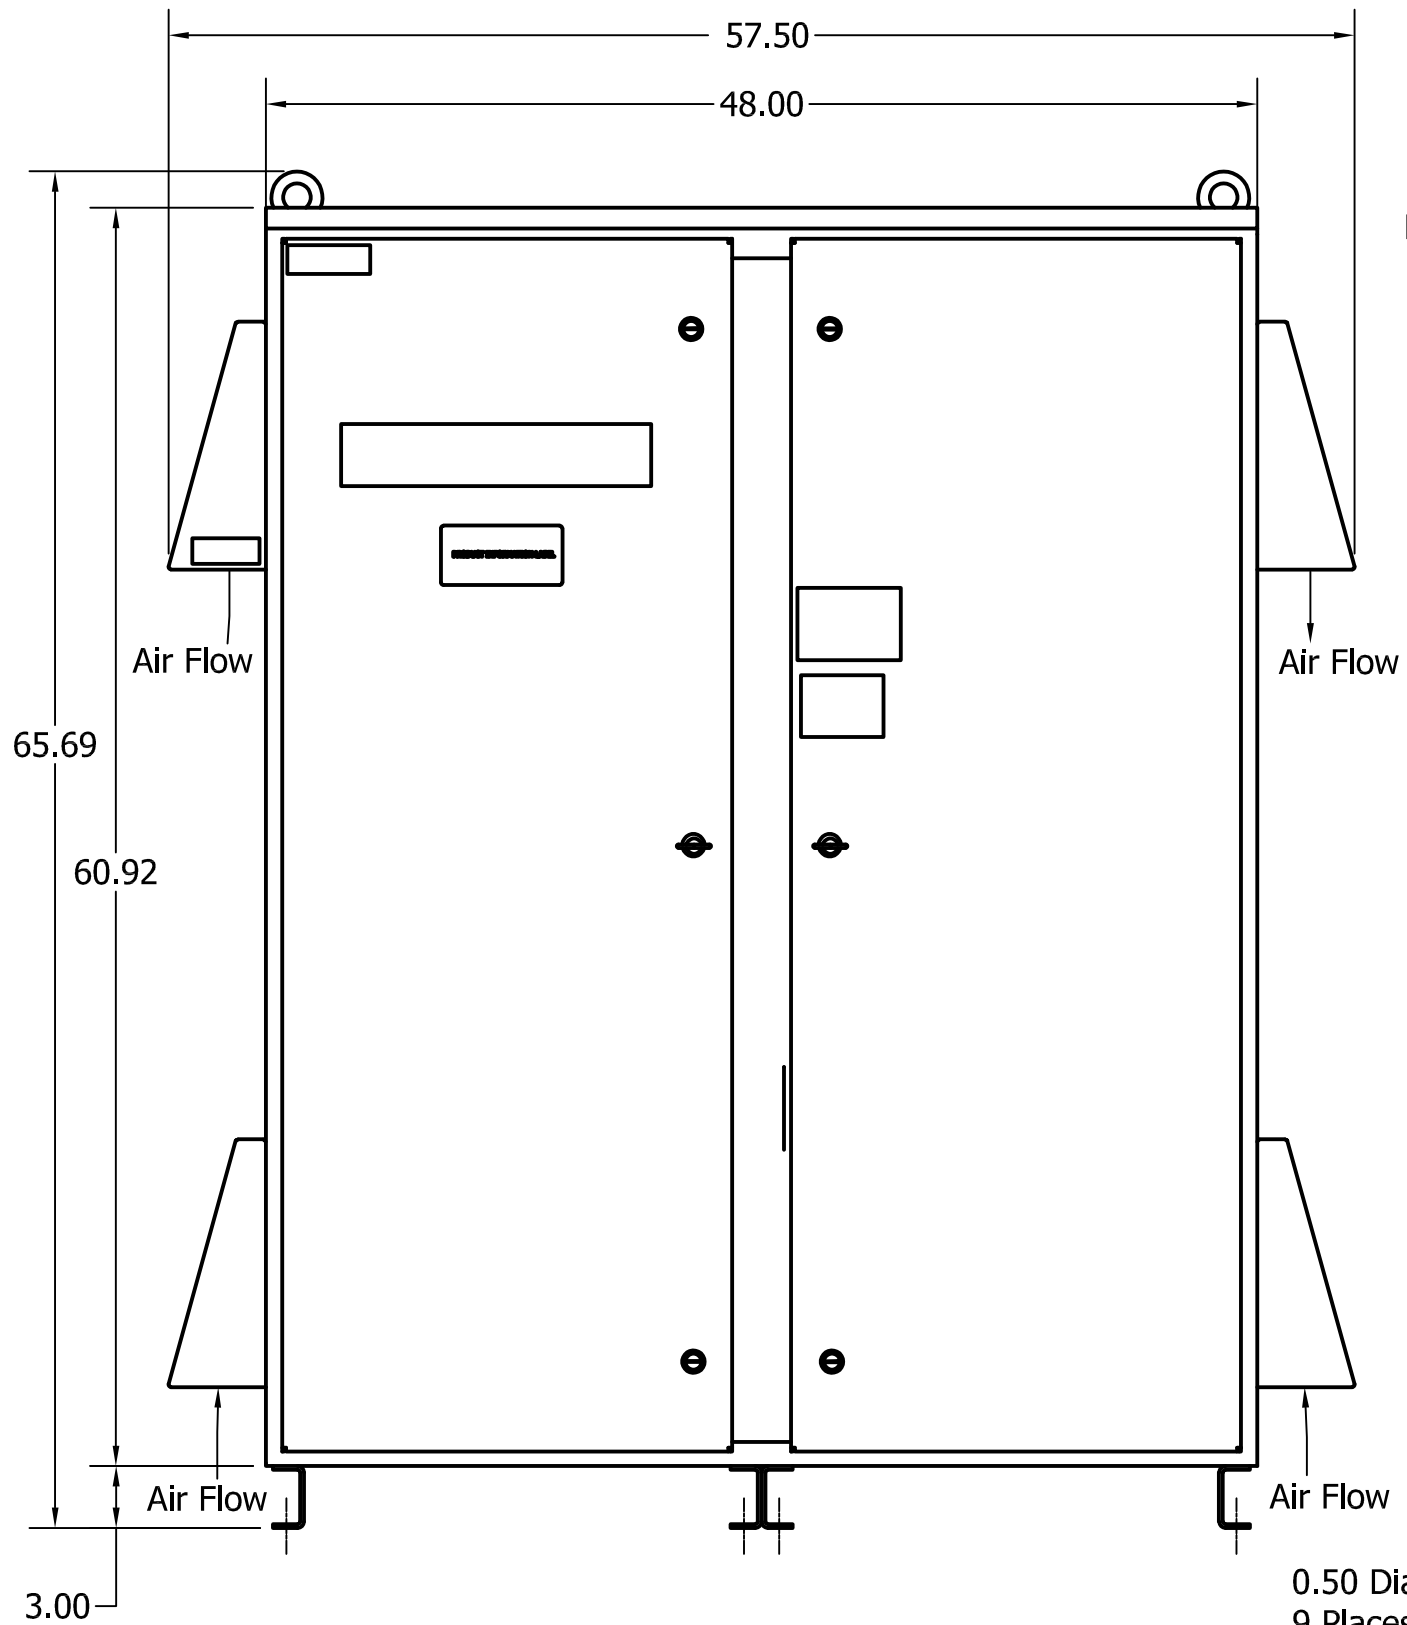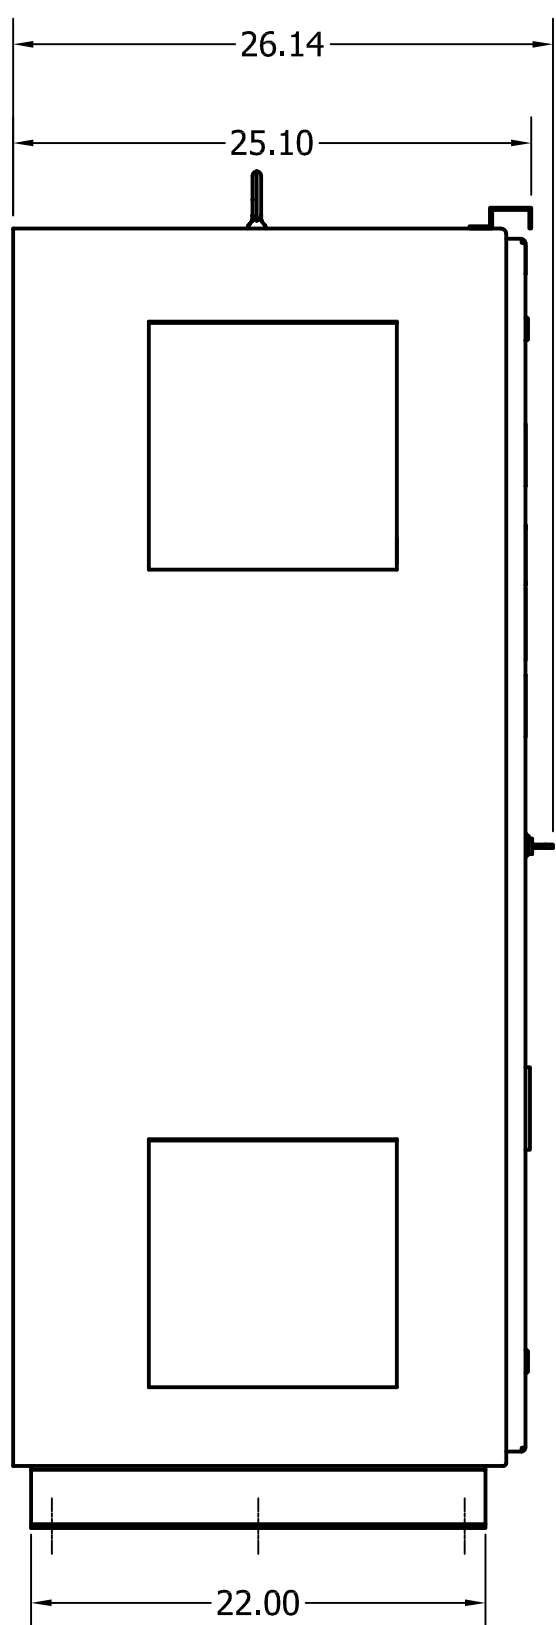

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	SCALE
A	AS DESIGNED	10/9/17	DSW	ANGULAR +/- 1°
NO				

	W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022
	HGL0450CW3C0000, 600V, 450HP, 3 Phase HGL0450CW3S0000, 600V, 450HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter
DRN. BY DSW	DATE 10/9/17
SCALE 1/8	DWG. No. 107316DG
	SHEET 1 OF 1