



| Unit Specifications | | | | | |
|---------------------|----------|------|-----|-------|-----|
| kVar | Harmonic | Volt | HZ. | Phase | HP |
| 75 | 5TH | 600 | 60 | 3 | 500 |

| TCI Part Number | Option | Weight | Schematic |
|-----------------|-----------|--------|-----------|
| HGL0500CW3S0000 | Standard | 885lbs | 30807-S |
| HGL0500CW3C0000 | Contactor | 900lbs | 30807-C |

See IOM Manual For Wire Range
And Tightening Torque.

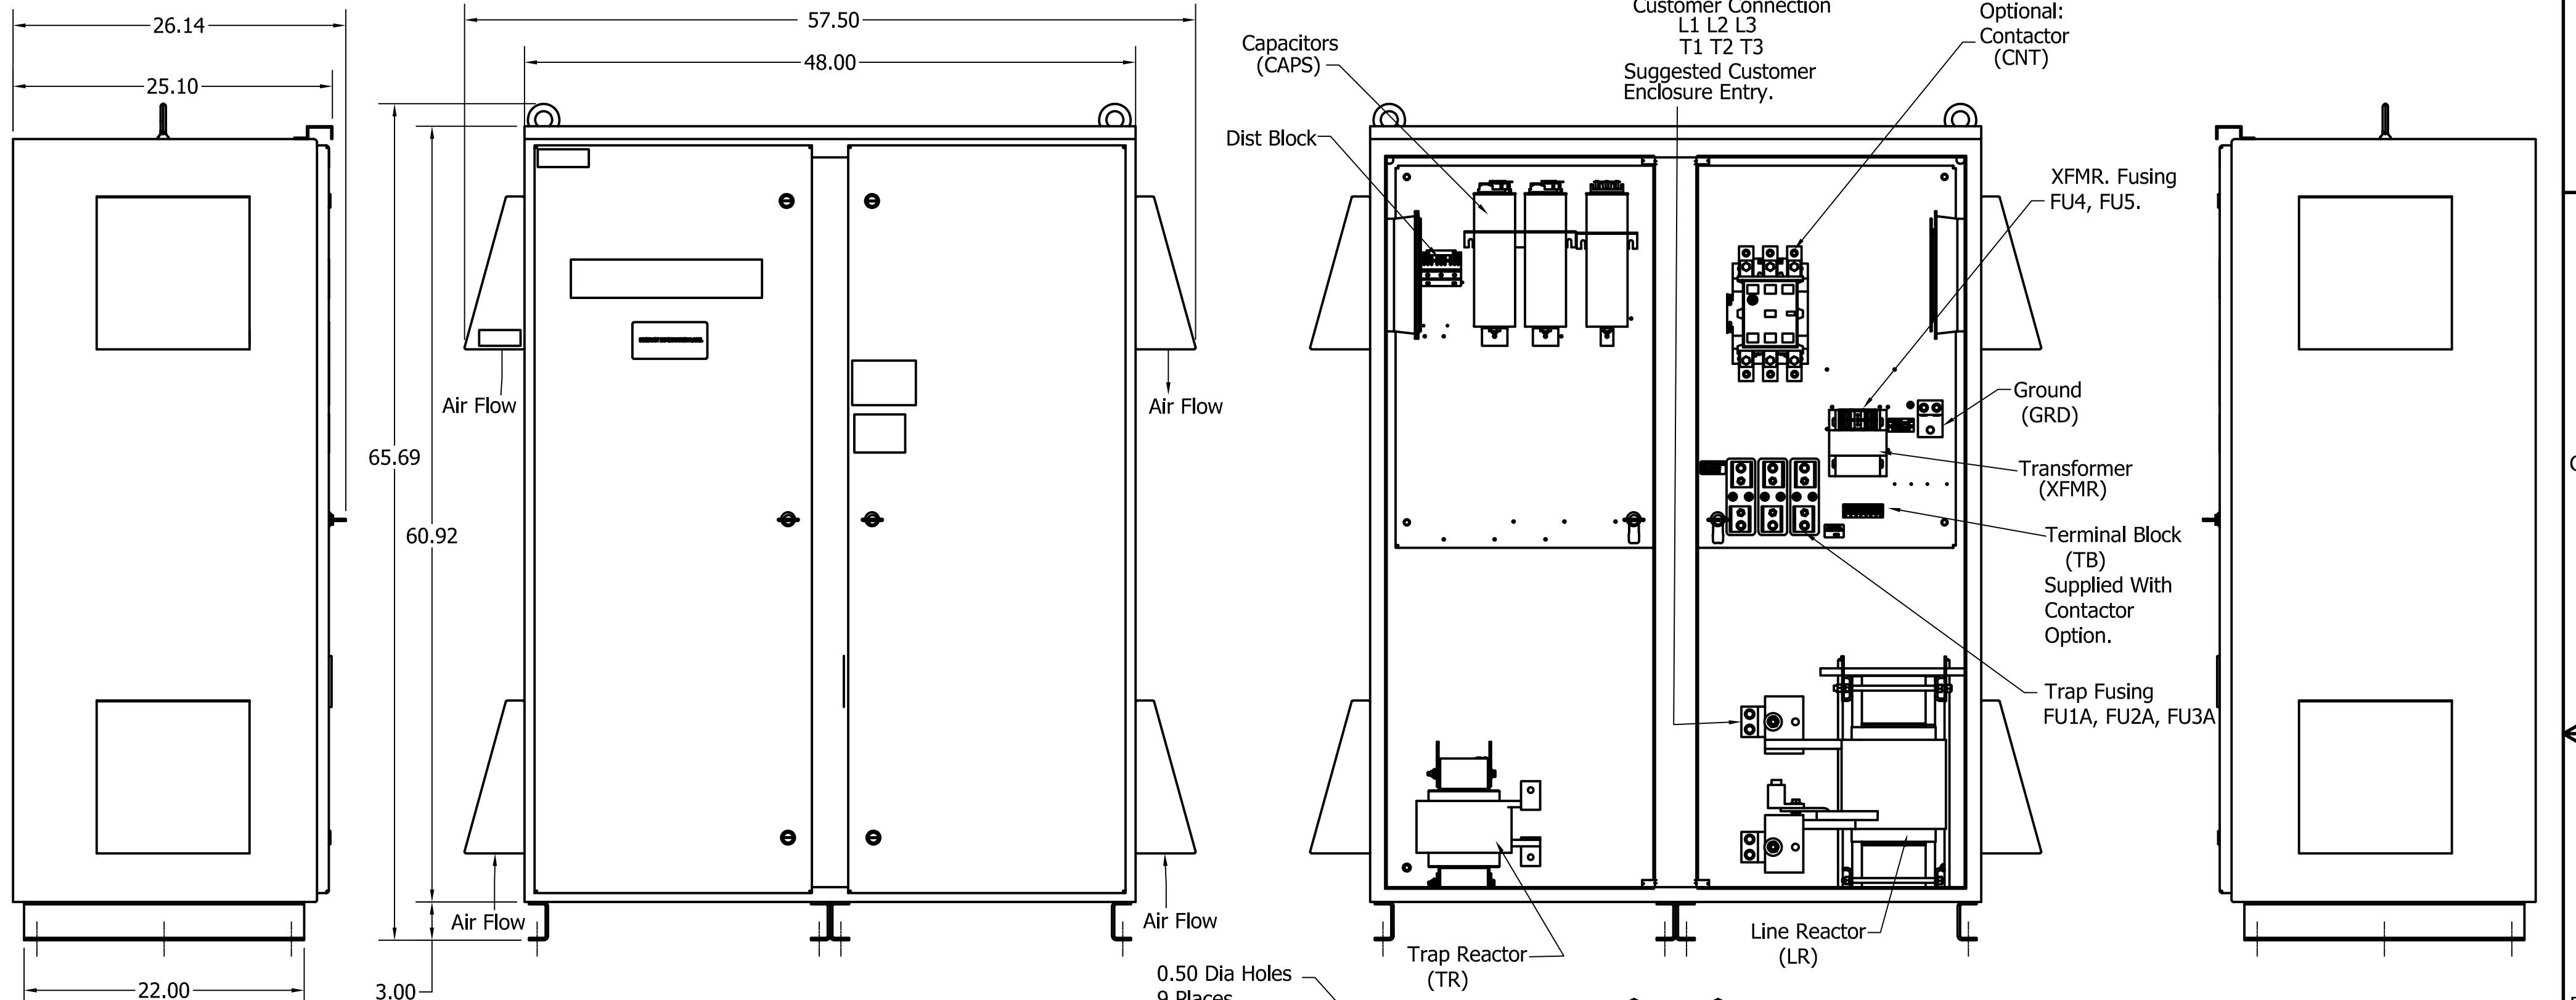

0.50 Dia Holes
9 Places.

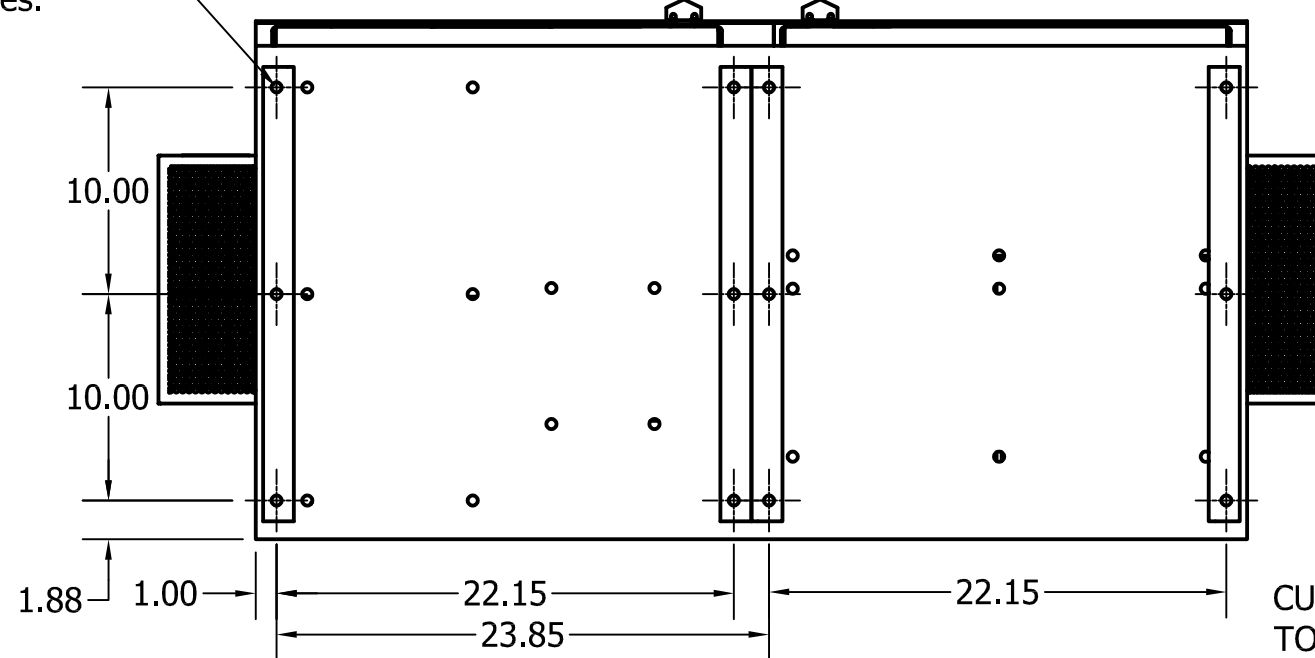

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELETTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

| NO | REVISION | DATE | BY | SCALE |
|----|-------------|---------|-----|----------------|
| A | AS DESIGNED | 10/9/17 | DSW | ANGULAR +/- 1° |

| | |
|--|--|
| | W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022 |
| | HGL0500CW3C0000, 600V, 500HP, 3 Phase HGL0500CW3S0000, 600V, 500HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter |
| | DRN. BY: DSW DATE: 10/9/17 SCALE: 1/8 DWG. No.: 107317DG SHEET 1 OF 1 |

4

3

2

1

4

3

2

1