

208/240 Rated Voltage, 600 Max Voltage, High Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF25H	30	88	92	189	31	179	SLK10
KDRULF26H	40	114	114	152	31	193	SLK10


208/240 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF24L	30	88	100	116	31	135	SLK10
KDRULF25L	40	114	118	88.6	31	149	SLK10
KDRULF26L	50	143	152	69.9	31	154	SLK21

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF3L	75	96	110	196	31	193	SLK10




575 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF45L	100	99	99	272	31	194	SLK10

480 Rated Voltage, 600 Max Voltage, Output							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF3P	75	96	110	107	31	95	SLK10

575 Rated Voltage, 600 Max Voltage, Output							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULF33P	100	99	110	104	31	95	SLK10

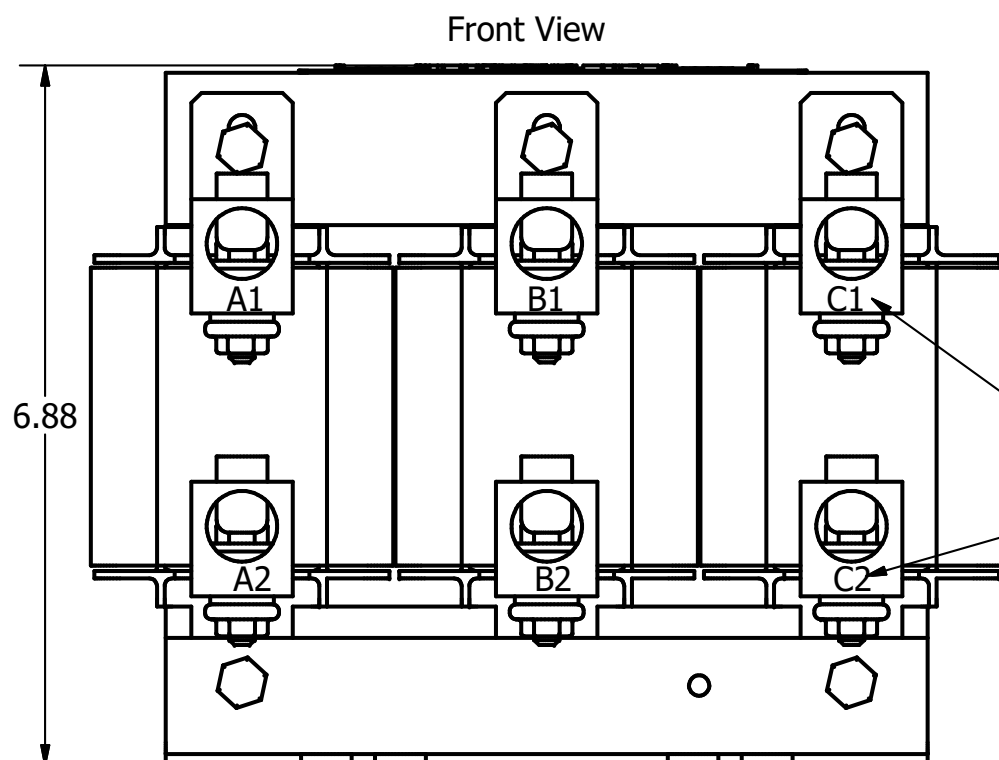

(Customer Connections)
Markings On Pressure Terminals
For Reference Only.

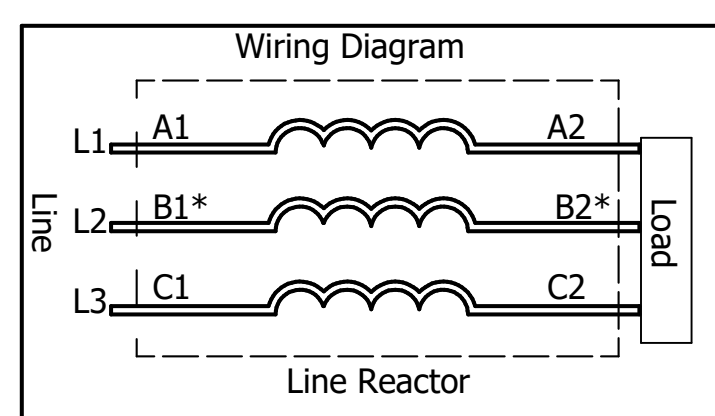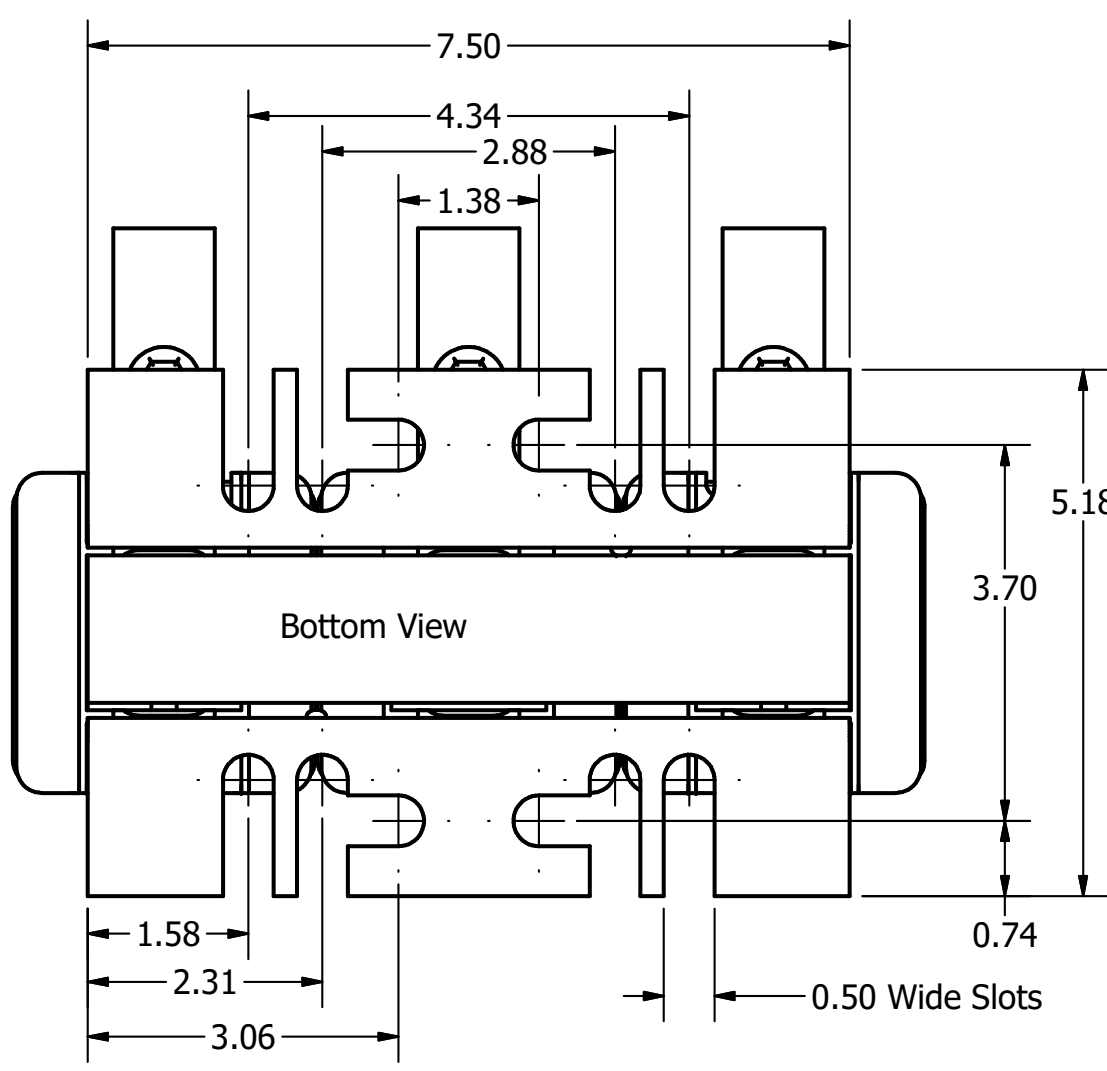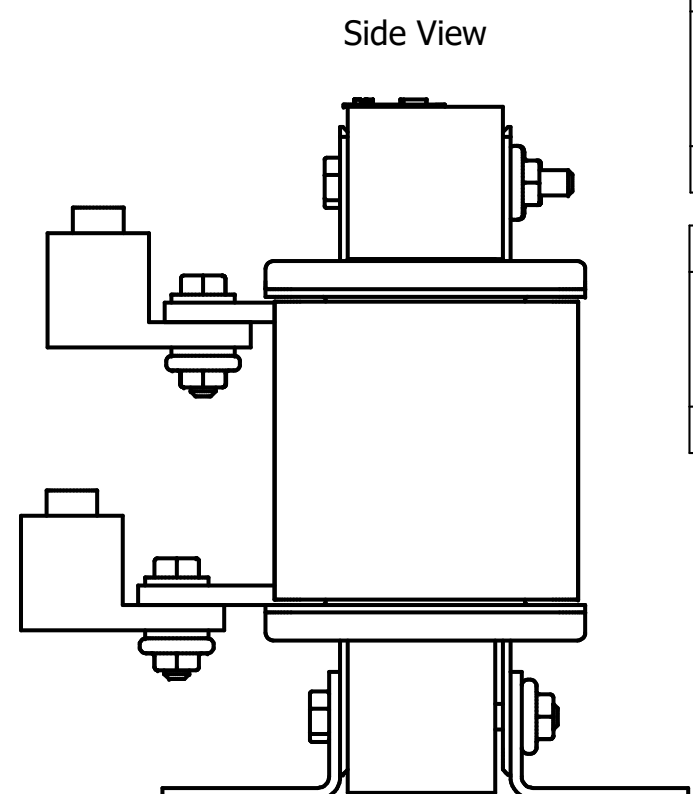

* For single phase applications, use coils A and C, Isolate terminals B1 and B2.

(800) 824-8282 transcoll.com

KDRUL Drive Reactor
KDRUL — Motor Amps —
3PH, 50/60Hz, —V Rated, 600V Max, —A Max
40C Amb Max, 135C Rise, RoHS
Turn Torque — B-In

TCI, LLC
 Germantown, WI, USA.
 transcoll.com
 800-824-8282

DATE CODE **A1** **A2** **B1** **B2** **C1** **C2**

- Note:
1. UL file number: cULus Listed File E116124.
 2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. For Terminal Torques And Wire Size See, KDR IOM Manual, Part Number 30895
 4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
 5. Material(s) Shall be RoHS Compliant
 6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		TCI		W132 N10611 Grant Drive Germantown, WI 53022	
A Combined Drawings		1/22/18		DSW		DRN BY DSW		DATE: 1/22/18	
NO REVISION		DATE		BY		SCALE: 1/2		APRVD: 107573DG	
						SIZE C		SHT.2 OF 2	