

480 Rated Voltage, 600 Max Voltage, High Z, Impedance.


Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULS1H	600	720	750	43.4	276	685	SLK15

**TCL** (800) 824-8282 transcoll.com  
 TCL, LLC  
 Germantown, WI, USA  
 transcoll.com  
 800-824-8282

KDRUL Drive Reactor  
 KDRUL— Motor Amps —  
 3PH, 50/60Hz, —V Rated, 600V Max, —A Max  
 40C Amb Max, 155C Rise, RoHS  
 Term Torque— lb-in

UL LISTED CE  
 2ND CONT. EQ. MARK

DATE CODE A1 A2 B1 B2 C1 C2

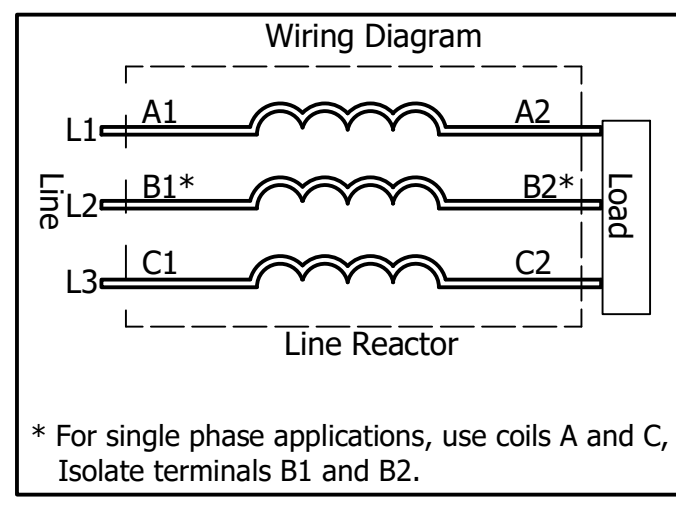

- Note:
1. UL file number: cULus Listed File E116124.
  2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
  3. For Terminal Torques And Wire Size See, KDR IOM Manual, Part Number 30895
  4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
  5. Material(s) Shall be RoHS Compliant
  6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
D	5548, Removed KDRULS2H	03/30/21	JRN
C	5502, Update Watts Loss	2/2/2021	DSW

TCL An Allied Motion Company  
 W132N10611 Grant Drive  
 Germantown, WI 53022  
 © 2021 TCL, LLC

KDRUL S Frame Copper Bus  
 Reactor Drawing

DRN: DSW DATE: 2/28/2018 107538DG  
 SCALE: 1/3.2 APRVD: SIZE: C SHT 4 OF 8