

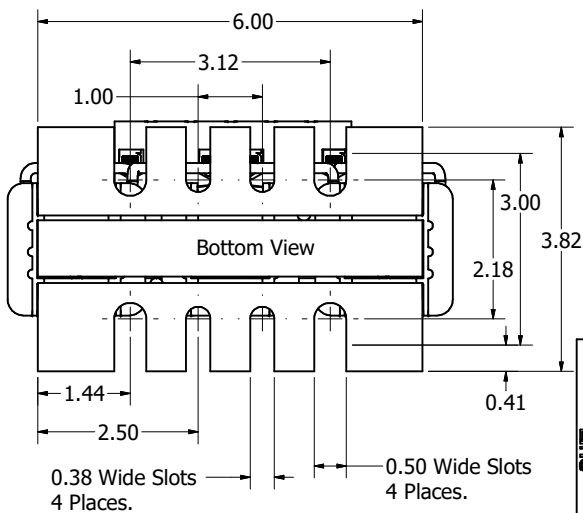
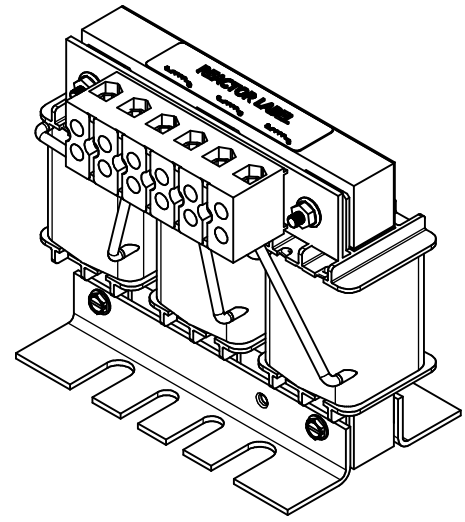
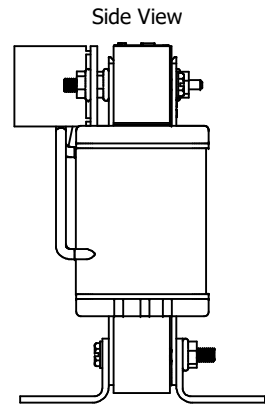


(Customer Connections)  
Markings On Terminal Block  
For Reference Only.

Wire Range: 4-18 AWG.  
Torque : 20 IN-LBS (2.3 Nm)

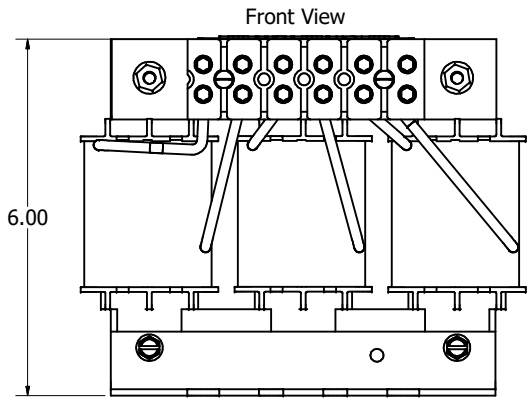

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.					
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)
KDRD1L	25	34	37	569	10

**TCI** (800) 824-8282 [transcoil.com](http://transcoil.com)  
**TCI, LLC**  
 Germantown, WI, USA  
[transcoil.com](http://transcoil.com)  
 800-824-8282

KDR/L Drive Reactor  
 KDR - Motor Amps -  
 30% 30/40/45, -1 Rated, 600V Max, -A Max, RoHS  
 48C Amb Max, 135C Rise  
 Manual #30895

UL LISTED CE  
 2ND CONC. EQ. 1992

DATE CODE A1 A2 B1 B2 C1 C2

Notes:

- UL file number: cULus Listed File E116124.
- KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
- KDR IOM Manual Part Number 30895
- Material(s) Shall be RoHS Compliant
- Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY	SCALE
J	6799, Match Revisions	9/16/2024	DSW	1/11.5

**TCI** W132N10611 (Rev 11/24)  
 Germantown, WI 53022  
 © 2024 TCI, LLC

An Allied Motion Company

KDRD1L  
 Reactor Drawing

DRN BY: DSW DATE: 9/16/2024 109655DG  
 SCALE: 1/11.5

SHT 1 OF 1