

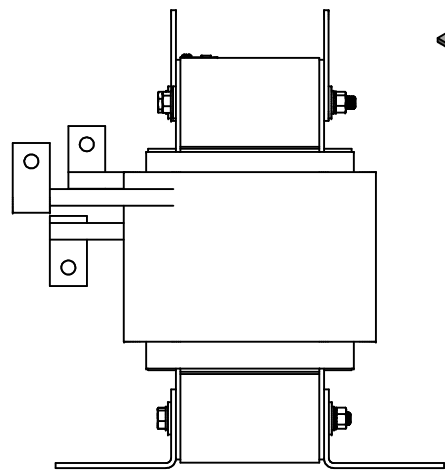
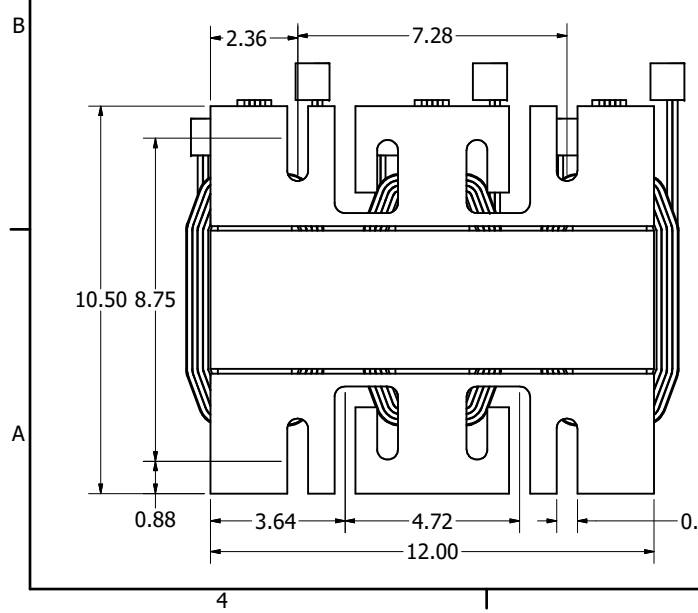
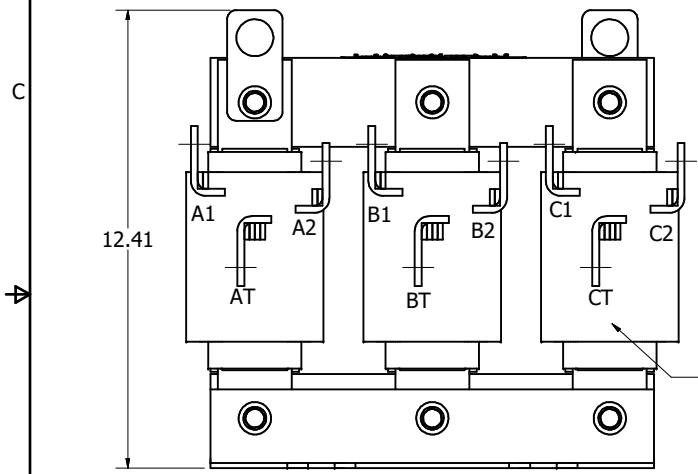


HP	Reactor Part Number	Rated Amps (A)	Max Amps (A)	uH +/- 5%	Weight (LBS)
200	KDRS41TT	154.6	192	695	145

System Voltage 600V, 60Hz.

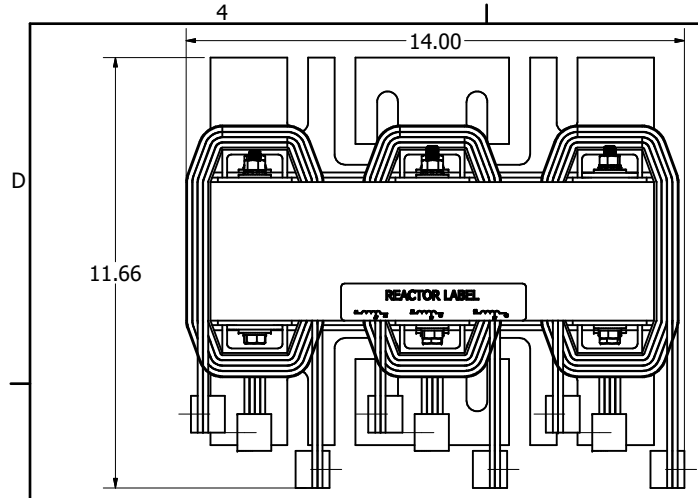

0.38 Dia Holes

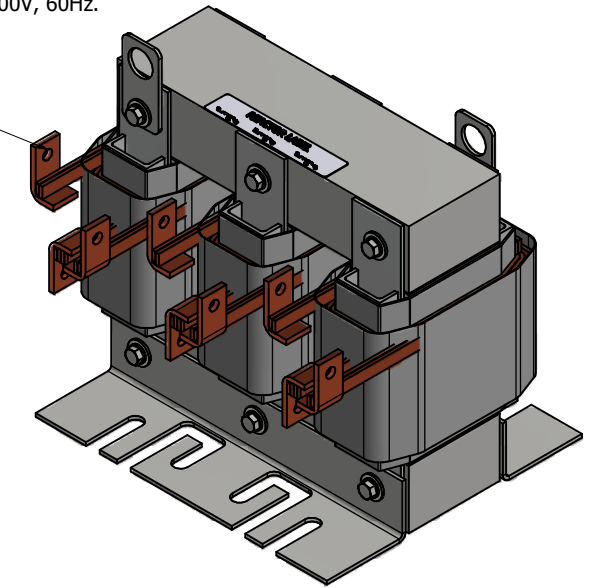

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
Material(s) Shall be RoHS Compliant

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			
THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.	E	6693, Chg. lead Length's Same As Rev C	6/5/2024 DSW
	D	6630, All cut to 2.25"	4/5/2024 DSW
	C	6260, Update Lead Lengths	5/4/2023 DSW
	B	5956, Update Depth Dimension	6/1/2022 DSW
	A	5700, Terminal Chg 14566 to 15465	
	A	5700, Update coil, No longer bending start	8/27/2021 DSW
NO	REVISION	DATE	BY
		TOLERANCES (EXCEPT AS NOTED)	
		DECIMAL	
		.XX ± .25	
		.XXX ± .10	
		FRACTIONAL	
		± 1/16	
		ANGULAR	
		± 1°	
		TOL. BY DSW DATE 8/27/2021	
		SCALE: 1:2.6	
		PART NO. 105672DG	
		SHEET 1 OF 1	

TCL W132N10611 (Rev 13) 5/25
Germantown, WI 53022
© 2024 TCL, LLC
An Allied Motion Company
KDR, HGP Inductor, 600V, 200HP