


9


.50 DIA MOUNTING HOLES 4 PLACES.

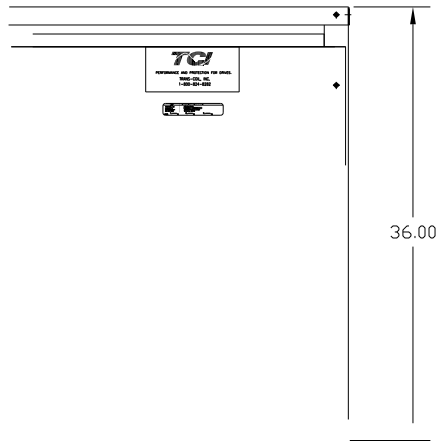


36.00

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRX2HC7	480	800	960	1661	450	.53

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

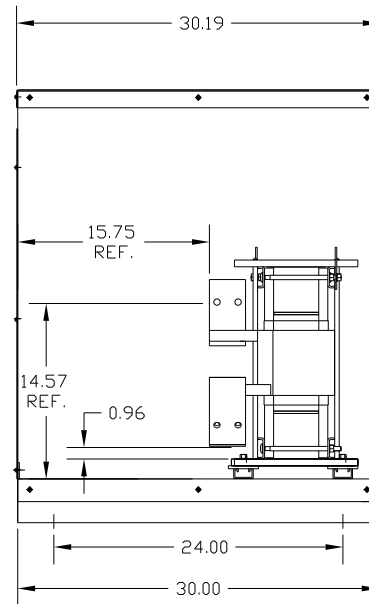

				TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		KDR DRIVE REACTOR, ENCLOSED	
				.XX ± .03		480V LOW Z, FRAME X	
				.XXX ± .01		DRN BY DSW DATE 2/15/12 DWG NO B KDRX2HC7DG	
				FRACTIONAL		SCALE	
				± 1/32		APRVD	
				ANGULAR		SHT. 1 OF 1	
				± 1/2°			
NO	REVISION	DATE	BY				