



575 Rated Voltage, 600 Max Voltage, Output						
TCI Part #	Horsepower (HP)	Amps (A)	---uH+/-10%	Losses (W)	Weight (LBS)	Terminal Holes Size (Inches)
KLR360DCB	350	360	73	420	98	0.56 Dia
KLR420DCB	400	420	63	435	100	0.56 Dia

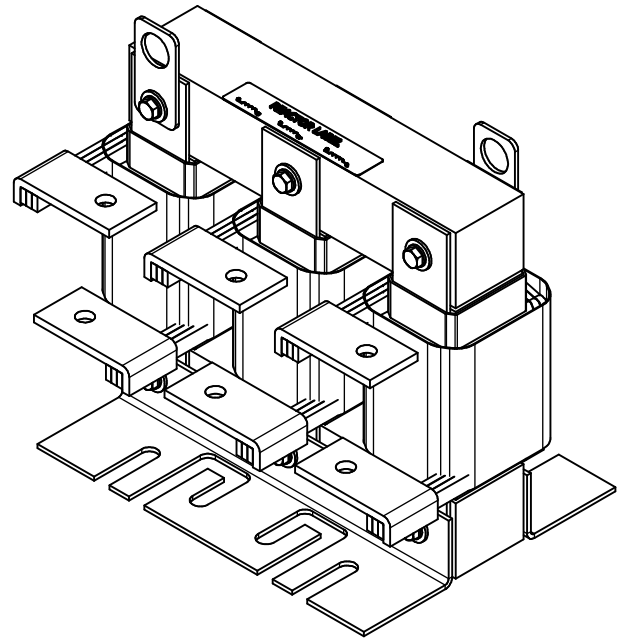

Customer Is Responsible For Installation  
To Meet All National And Local Electrical Codes.  
Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.					TOLERANCES (EXCEPT AS NOTED)	 W132N10611 (Rev 1) 12/2023 Germantown, WI 53022 © 2024 TCI, LLC	
					DECIMAL		
						.XX ± .25 .XXX ± .10	
						FRACTIONAL	
F	6685, Drawing updated	5/28/2024	DSW		± 1/32	KLR - Line Reactor L Frame KLR-30-IDG	
E	2766 chg term flag	9/12/11	DSW		ANGULAR		
NO	REVISION	DATE	BY		± 1°	DWN BY: _____ DATE: 09/12/11 SCALE: 1/2.5 DRAWN BY: _____ CHECKED BY: _____	