
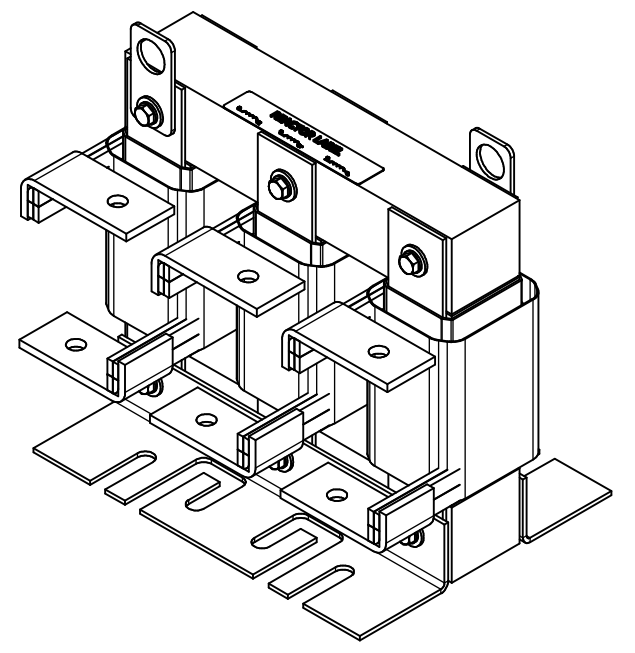
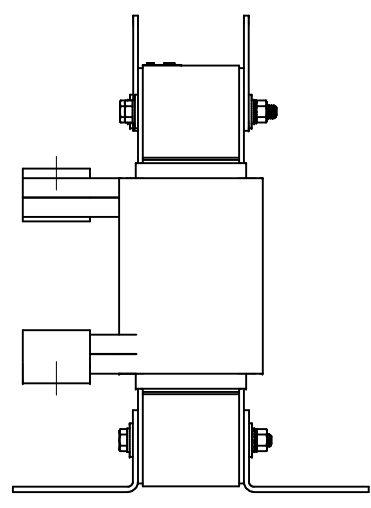
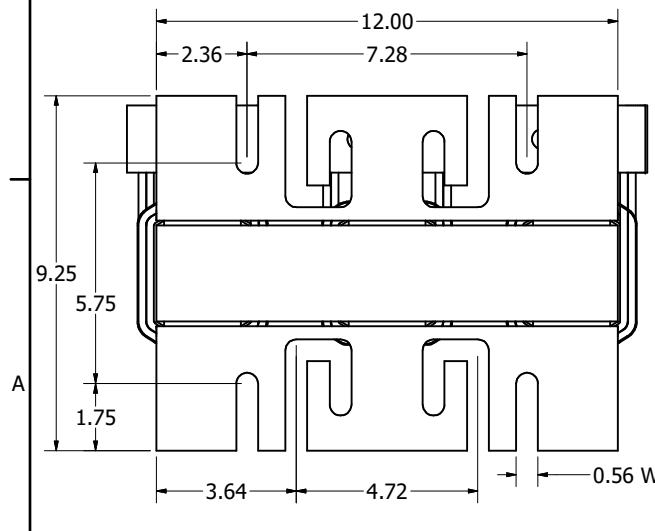
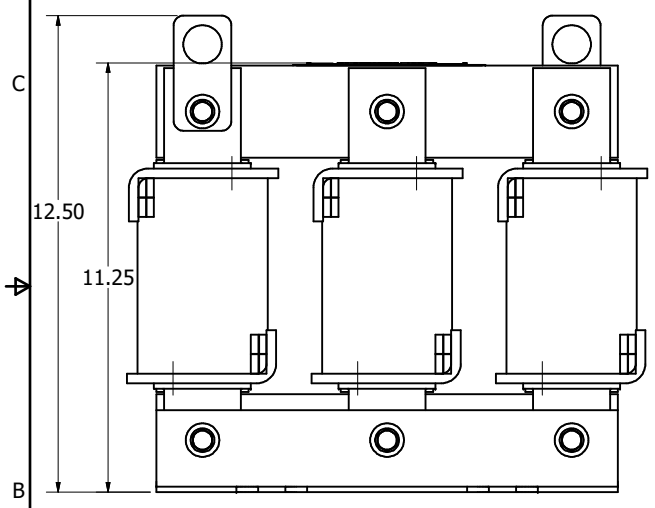



480 Rated Voltage, 600 Max Voltage, Output						
Part Number	Horsepower (HP)	Maximum Amps (A)	---uH+/-10%	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)
KLR600BCB	450	600	18	96	338	0.53

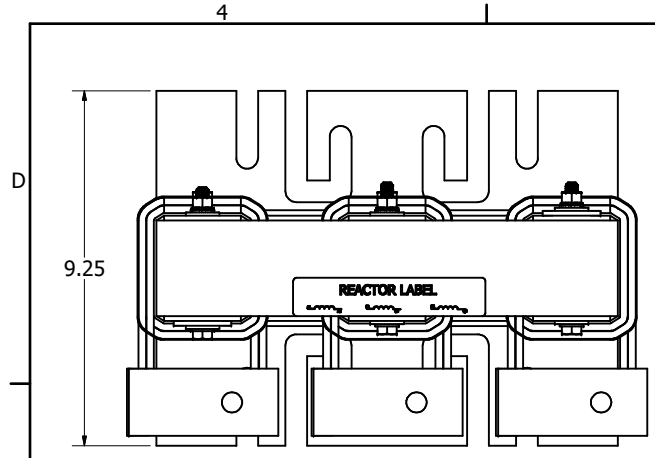

Customer Is Responsible For Installation
To Meet All National And Local Electrical Codes.
Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev 13 Feb 2024) Germantown, WI 53022 © 2024 TCI, LLC	
				DECIMAL			.XX ± .25 .XXX ± .10
				FRACTIONAL		± 1/32	
				ANGULAR		± 1°	
A	6685, Drawing Was KLR-30	5/24/2024	DSW	DRN BY	DATE	5/24/2024	KLR-30-5DG
NO	REVISION	DATE	BY	SCALE	1/2.5	DRWN	REV

4

3

2

1

4

3

2

1

D

D

C

C

B

B

A

A