
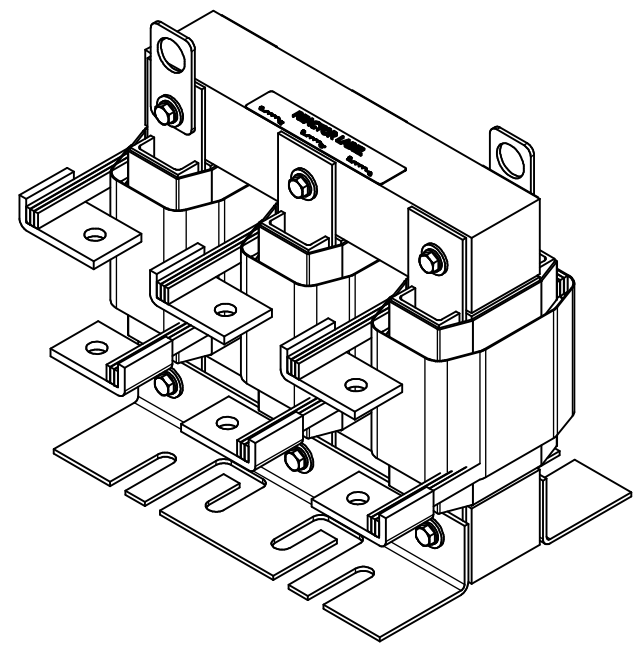



480 Rated Voltage, 600 Max Voltage, Output						
Part Number	Horsepower (HP)	Maximum Amps (A)	---uH+/-10%	Weight (LBS)	Terminal Hole Size (Inches)	Available Lug Kit
KLR420ACB	350	420	53	95	0.56	SLK14

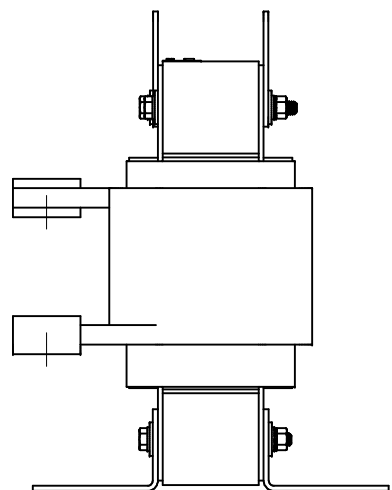

Customer Is Responsible For Installation
To Meet All National And Local Electrical Codes.
Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.					TOLERANCES (EXCEPT AS NOTED)	 W132N10611 (Rev 1) 5/24 Germantown, WI 53022 © 2024 TCI, LLC	
					DECIMAL		
						.XX ± .25 .XXX ± .10	
						FRACTIONAL	
	F	6822, Resigned (Match Revs)	9/27/2024	DSW	± 1/32	L Frame KLR Reactors L Frame KLR-30-6DG	
	A	6685, Drawing Was KLR-30	5/24/2024	DSW	ANGULAR		
	NO	REVISION	DATE	BY	± 1°	DWN BY: DSW DATE: 5/24/2024 SCALE: 1/2.5 DRAWN: DSW CHECK: DSW SHEET 1 OF 1	