
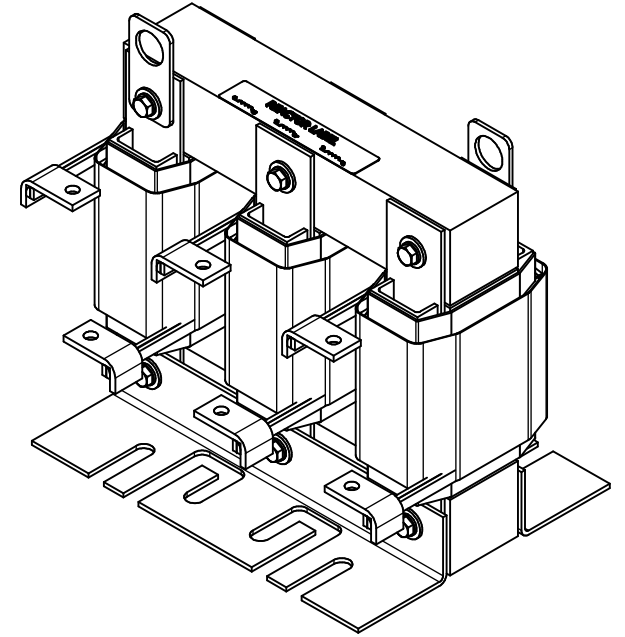



480 Rated Voltage, 600 Max Voltage, Output						
Part Number	Horsepower (HP)	Maximum Amps (A)	---uH+/-10%	Weight (LBS)	Terminal Hole Size (Inches)	Available Lug Kit
KLR200CCB	150	200	184	90	0.38	SLK11-1

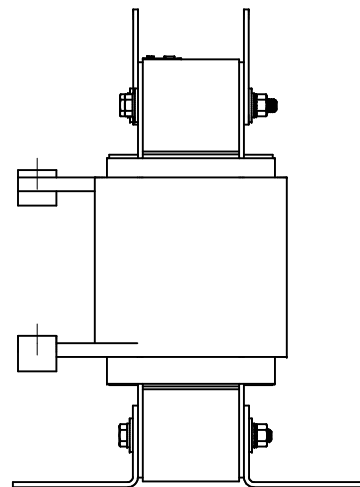

Customer Is Responsible For Installation
To Meet All National And Local Electrical Codes.
Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.					TOLERANCES (EXCEPT AS NOTED)	 W132N10611 (Rev 15) 5/24 Germantown, WI 53022 © 2024 TCI, LLC	
					DECIMAL		
						.XX ± .25 .XXX ± .10	
	F	6832, Redesigned/ Match Revs	10/8/2024	DSW		FRACTIONAL	
A	6685, Drawing Was KLR-30	5/24/2024	DSW		ANGULAR		
NO	REVISION	DATE	BY		± 1°		

KLR200CCB	
L Frame, Reactor Drawing	
DRN BY: DSW	DATE: 5/24/2024
SCALE: 1/2.5	REVISED: 0
KLR-30-8DG	
SHT 1 OF 1	