

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS
5% Z	1	KLR2EQDDRVD	2	4	13

**TCI** Performance and Protection for Drives.

TRANS-COIL, INC  
MILWAUKEE WI  
WWW.transcoil.com  
800-824-8282

**KLR Series Line Reactor**  
CATALOG# \_\_\_\_\_  
3PH, 50/60Hz, 690V Max, \_\_\_\_\_ Amps RoHS

TRANS-COIL, INC  
MILWAUKEE WI  
WWW.transcoil.com  
800-824-8282

DATE 0000


A1 A2

B1 B2


C1 C2

CE


NOTE: CUSTOMER CAN CHANGE MOUNTED REACTOR, FROM VERTICAL TO HORIZONTAL ON DIN BRACKET.

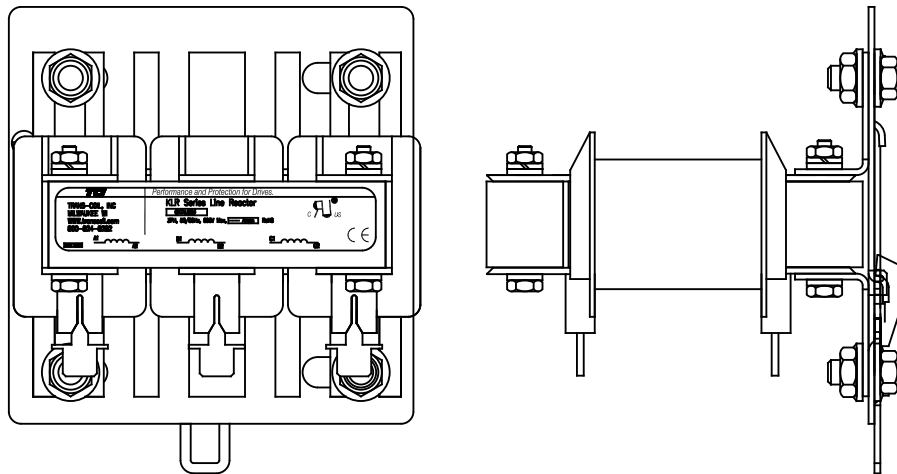

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD 35mm DIN RAIL. TCI'S MINIMUM RECOMMENDATION IS TO USE: HIGH PROFILE STANDARD 35mm STEEL RAIL OR HEAVY DUTY STANDARD 35mm STEEL RAIL.



STANDARD STEEL HIGH PROFILE DIN RAIL.



HEAVY DUTY STEEL DIN RAIL.

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING MOUNTED REACTORS.

				7878 N. 86th STREET MILWAUKEE, WI 53224	
				<b>KLR DIN RAIL 690V (FRAME A)</b>	
TOLERANCES (EXCEPT AS NOTED)		DRAWN BY		DATE	
DECIMAL		DSW		03/06/07	
.XX ±.03		SCALE		APRVL	
.XXX±.010		TO FIT		C	
FRACTIONAL		NO		KLR2EQDDRVDG	
± 1/16		REVISION		SHT.1 OF1	
ANGULAR		DATE			
± 1/2°		BY			