


NOTE: CUSTOMER CAN CHANGE MOUNTED REACTOR, FROM VERTICAL TO HORIZONTAL ON DIN BRACKET.

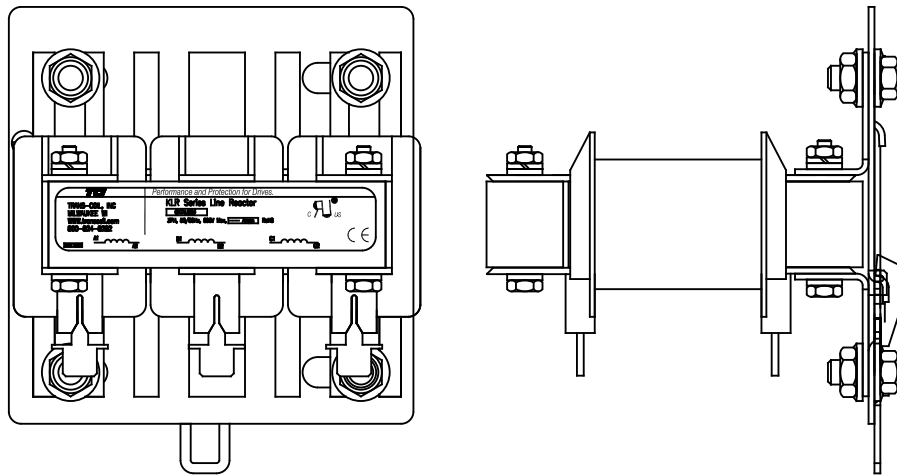

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS
5% Z	1.5-2	KLR3EQDDRV	3	5	17

TCI Performance and Protection for Drives.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

KLR Series Line Reactor

CATALOG# _____

3PH, 50/60Hz, 690V Max, _____ Amps RoHS

DATE 0000

A1 A2


B1 B2

C1 C2


RU[®] US

CE

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD 35mm DIN RAIL. TCI'S MINIMUM RECOMMENDATION IS TO USE: HIGH PROFILE STANDARD 35mm STEEL RAIL OR HEAVY DUTY STANDARD 35mm STEEL RAIL.



STANDARD STEEL HIGH PROFILE DIN RAIL.



HEAVY DUTY STEEL DIN RAIL.

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING MOUNTED REACTORS.

				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				KLR DIN RAIL 690V (FRAME A)	
		TOLERANCES (EXCEPT AS NOTED)		DWG NO. KLR3EQDDRV DG	
		DECIMAL		DATE 03/06/07	
		.XX ±.03		APPRV. _____	
		.XXX±.010		SCALE TO FIT	
		FRACTIONAL ± 1/16		SHT. 1 OF 1	
		ANGULAR ± 1/2°			
NO.	REVISION	DATE	BY		